

(12) STANDARD PATENT

(11) Application No. AU 2001292695 B2

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Liner hanger with sliding sleeve valve

(51) International Patent Classification(s)
E21B 23/00 (2006.01) E21B 34/14 (2006.01)
E21B 33/16 (2006.01) E21B 43/10 (2006.01)
E21B 34/06 (2006.01)

(21) Application No: 2001292695 (22) Date of Filing: 2001.09.17

(87) WIPO No: WO02/23007

(30) Priority Data

(31) Number (32) Date (33) Country
60233638 2000.09.18 US

(43) Publication Date: 2002.03.26

(43) Publication Journal Date: 2002.06.13

(44) Accepted Journal Date: 2006.07.06

(71) Applicant(s)
Shell Internationale Research Maatschappij B.V.

(72) Inventor(s)
Ring, Lev;Zwald, Edwin A.;Nida, Ronald D.;Cook, Robert Lance;Daigle, Chan;Noel, Gregory M.;Dean, William J;Stephenson, William Rusty;Gusevik, Rune T.;Brisco, David P.;Filippov, Andrei Gregory;Wadell, Kevin K.

(74) Agent / Attorney
Davies Collison Cave, 1 Nicholson Street, MELBOURNE, VIC, 3000

(56) Related Art
US 6085838 A

BEST AVAILABLE COPY

174

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 March 2002 (21.03.2002)

PCT

(10) International Publication Number
WO 02/23007 A1

(51) International Patent Classification: E21B 23/00,
33/14

(21) International Application Number: PCT/US01/28960

(22) International Filing Date:
17 September 2001 (17.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/233,638 18 September 2000 (18.09.2000) US

(71) Applicant (for all designated States except US): SHELL
OIL COMPANY [US/US]; 910 Louisiana Street, Hous-
ton, TX 77252-2463 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BRISCO, David, P.
[US/US]; 405 Westridge Drive, Duncan, OK 73533 (US).
ZWALD, Edwin, A. [US/US]; Memorial Drive #110,
Houston, TX 77024 (US). DAIGLE, Chan [US/US]; 3017
E. Elm Circle, Katy, TX 77493 (US). NOEL, Gregory,
M. [US/US]; 611 Whitehurst, Katy, TX 77450 (US).
DEAN, William, J. [US/US]; 22602 Crescent Cove Court,

Katy, TX 77494 (US). FILIPPOV, Andrei, Gregory
[US/US]; 2606 Hidden Shore Drive, Katy, TX 77450
(US). NIDA, Ronald, D. [US/US]; 31618 Pulshear Creek
Trail, Pulshear, TX 77441 (US). COOK, Robert, Lance
[US/US]; 934 Caswell Court, Katy, TX 77450 (US).
RING, Lev [RU/US]; 14126 Heatherhill Place, Houston,
TX 77077 (US). WADELL, Kevin, K. [US/US]; 11007
Sprucedale Court, Houston, TX 77070 (US). STEPHEN-
SON, William, Rusty [US/US]; 14220 Park Row #1415,
Houston, TX 77084 (US). GUSEVIK, Rune, T. [US/US];
15206 Chimney Hill, Houston, TX 77095 (US).

(74) Agents: BECKER, Jeffrey, M. et al.; Haynes and Boone
L.L.P., 1000 Louisiana, Suite 4300, Houston, TX 77002
(US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: LINER HANGER WITH SLIDING SLEEVE VALVE

10



(57) Abstract: An apparatus and method for forming or repairing a wellbore casing, a pipeline, or a structural support is disclosed. An expandable tubular member (20a) is radially expanded and plastically deformed by an expansion cone (18) that is displaced by hydraulic pressure. Before or after the radial expansion of the expandable tubular member (20a), sliding sleeve valve (42) within the apparatus permit a hardenable fluidic sealing material to be injected into an annulus between the expandable tubular member (20a) and a preexisting structure.

WO 02/23007 A1

WO 02/23007 A1

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 268

LINER HANGER WITH SLIDING SLEEVE VALVE

Background of the Invention

This invention relates generally to wellbore casings, and in particular to wellbore casings that are formed using expandable tubing, as well as to coupling expandable tubing to preexisting structures.

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

The present invention is directed to overcoming one or more of the limitations of the existing procedures for forming wellbores, as well as generally to the coupling of expandable tubing to preexisting structures.

Summary of the Invention

According to one aspect of the invention, a method of forming a wellbore casing within a borehole within a subterranean formation is provided that includes positioning an expandable tubular member within the borehole, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically

- 2 -

decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member.

According to another aspect of the present invention, an apparatus for forming a wellbore casing within a borehole within a subterranean formation is provided that includes means for positioning an expandable tubular member within the borehole, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member.

According to another aspect of the present invention, a method of forming a wellbore casing within a borehole within a subterranean formation is provided that includes positioning an expandable tubular member within the borehole, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member.

According to another aspect of the present invention, an apparatus for forming a wellbore casing within a borehole within a subterranean formation is provided that includes means for positioning an expandable tubular member within the borehole, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions,

2001292695 12 Apr 2006

- 3 -

and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member.

According to another aspect of the present invention, an apparatus for forming a wellbore casing within a borehole within a subterranean formation is provided that includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

According to another aspect of the present invention, an apparatus for forming a wellbore casing within a borehole in a subterranean formation is provided that includes means for radially expanding an expandable tubular member and means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the borehole, defining one or more passages and comprising: means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages.

According to another aspect of the present invention, a method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation is provided. The apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a

2001292695 12 Apr 2006

- 4 -

second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the borehole, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member.

According to another aspect of the present invention, a method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation is provided in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably

2001292695 12 Apr 2006

fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the borehole, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the annular region to radially expand a portion of the expandable tubular member, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.

According to one aspect of the invention, a method of coupling an expandable tubular member to a preexisting structure is provided that includes positioning an expandable tubular member within the preexisting structure, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member.

According to another aspect of the present invention, an apparatus for coupling an expandable tubular member to a preexisting structure is provided that includes means for positioning the expandable tubular member within the preexisting structure, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member.

2001292695 12 Apr 2006

According to another aspect of the present invention, a method of coupling an expandable tubular member to a preexisting structure is provided that includes positioning the expandable tubular member within the preexisting structure, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member.

According to another aspect of the present invention, an apparatus for coupling an expandable tubular member to a preexisting structure is provided that includes means for positioning the expandable tubular member within the preexisting structure, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member.

According to another aspect of the present invention, an apparatus for coupling an expandable tubular member to a preexisting structure is provided that includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member,

and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidicly coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

According to another aspect of the present invention, an apparatus for coupling an expandable tubular member to a preexisting structure is provided that includes means for radially expanding an expandable tubular member and means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the preexisting structure, defining one or more passages and comprising: means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages.

According to another aspect of the present invention, a method of operating an apparatus for coupling an expandable tubular member to a preexisting structure is provided. The apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidicly coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidicly coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidicly coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidicly coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the preexisting structure, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, displacing

2001292695 12 Apr 2006

the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member.

According to another aspect of the present invention, a method of operating an apparatus for coupling an expandable tubular member to a preexisting structure is provided in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the preexisting structure, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the annular region to radially expand a portion of the expandable tubular member, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages

and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.

5

Brief Description of the Drawings

Various embodiments of methods and apparatus in accordance with the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

10 Figs. 1 and 1a-1c are cross sectional illustrations of an embodiment of a liner hanger assembly including a sliding sleeve valve assembly.

Figs. 2a-2b is a flow chart illustration of an embodiment of a method for forming a wellbore casing using the liner hanger assembly of Figs. 1 and 1a-1c.

12 Apr 2006

2001292695

2001292695 12 Apr 2006

()

P:\OPERPH\12181120 ammd.doc-11/04/06

- 10 -

THIS PAGE IS INTENTIONALLY BLANK

Figs. 3a-3c are cross sectional illustrations of the placement of the liner hanger assembly of Figs. 1 and 1a-1c into a wellbore.

Figs. 4a-4c are cross sectional illustrations of the injection of a fluidic materials into the liner hanger assembly of Figs. 3a-3c.

5 Figs. 5a-5c are cross sectional illustrations of the placement of a bottom plug into the liner hanger assembly of Figs. 4a-4c.

Figs. 6a-6c are cross sectional illustrations of the downward displacement of sliding sleeve of the liner hanger assembly of Figs. 5a-5c.

10 Figs. 7a-7c are cross sectional illustrations of the injection of a hardenable fluidic sealing material into the liner hanger assembly of Figs. 6a-6c that bypasses the plug.

Figs. 8a-8c are cross sectional illustrations of the placement of a top plug into the liner hanger assembly of Figs. 7a-7c.

15 Figs. 9a-9c are cross sectional illustrations of the upward displacement of sliding sleeve of the liner hanger assembly of Figs. 8a-8c.

Figs. 10a-10c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 9a-9c in order to radially expand and plastically deform the expansion cone launcher.

20 Figs. 11a-11b is a flow chart illustration of an alternative embodiment of a method for forming a wellbore casing using the liner hanger assembly of Figs. 1 and 1a-1c.

Figs. 12a-12c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 5a-5c in order to at least partially radially expand and plastically deform the expansion cone launcher.

25 Figs. 13a-13c are cross sectional illustrations of the downward displacement of the sliding sleeve of the liner hanger assembly of Figs. 12a-12c.

Figs. 14a-14c are cross sectional illustrations of the injection of a hardenable fluidic sealing material through the liner hanger assembly of Figs. 13a-13c.

30 Figs. 15a-15c are cross sectional illustrations of the injection and placement of a top plug into the liner hanger assembly of Figs. 14a-14c.

Figs. 16a-16c are cross sectional illustrations of the upward displacement of the sliding sleeve of the liner hanger assembly of Figs. 15a-15c.

Figs. 17a-17c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 16a-16c in order to complete the radial expansion of the expansion cone launcher.

Figs. 18, 18a, 18b, and 18c are cross sectional illustrations of an alternative embodiment of a liner hanger assembly including a sliding sleeve valve assembly.

Figs. 19a-19b is a flow chart illustration of an embodiment of a method for forming a wellbore casing using the liner hanger assembly of Figs. 18 and 18a-18c.

Figs. 20a-20c are cross sectional illustrations of the placement of the liner hanger assembly of Figs. 18 and 18a-18c into a wellbore.

Figs. 21a-21c are cross sectional illustrations of the injection of a fluidic materials into the liner hanger assembly of Figs. 20a-20c.

Figs. 22a-22c are cross sectional illustrations of the placement of a bottom plug into the liner hanger assembly of Figs. 21a-21c.

Figs. 23a-23c are cross sectional illustrations of the downward displacement of sliding sleeve of the liner hanger assembly of Figs. 22a-22c.

Figs. 24a-24c are cross sectional illustrations of the injection of a hardenable fluidic sealing material into the liner hanger assembly of Figs. 23a-23c that bypasses the bottom plug.

Figs. 25a-25c are cross sectional illustrations of the placement of a top plug into the liner hanger assembly of Figs. 24a-24c.

Figs. 26a-26c are cross sectional illustrations of the upward displacement of sliding sleeve of the liner hanger assembly of Figs. 25a-25c.

Figs. 27a-27c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 26a-26c in order to radially expand and plastically deform the expansion cone launcher.

Figs. 28a-28b is a flow chart illustration of an alternative embodiment of a method for forming a wellbore casing using the liner hanger assembly of Figs. 18 and 18a-18c.

Figs. 29a-29c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 22a-22c in order to at least partially radially expand and plastically deform the expansion cone launcher.

5 Figs. 30a-30c are cross sectional illustrations of the downward displacement of the sliding sleeve of the liner hanger assembly of Figs. 29a-29c.

Figs. 31a-31c are cross sectional illustrations of the injection of a hardenable fluidic sealing material through the liner hanger assembly of Figs. 30a-30c.

10 Figs. 32a-32c are cross sectional illustrations of the injection and placement of a top plug into the liner hanger assembly of Figs. 31a-31c.

Figs. 33a-33c are cross sectional illustrations of the upward displacement of the sliding sleeve of the liner hanger assembly of Figs. 32a-32c.

Figs. 34a-34c are cross sectional illustrations of the injection of a
15 pressurized fluidic material into the liner hanger assembly of Figs. 33a-33c in order to complete the radial expansion of the expansion cone launcher.

Detailed Description

A liner hanger assembly having sliding sleeve bypass valve is provided. In several alternative embodiments, the liner hanger assembly provides a
20 method and apparatus for forming or repairing a wellbore casing, a pipeline or a structural support.

Referring initially to Figs. 1, 1a, 1b, and 1c, an embodiment of a liner hanger assembly 10 includes a first tubular support member 12 defining an internal passage 12a that includes a threaded counterbore 12b at one end, and a
25 threaded counterbore 12c at another end. A second tubular support member 14 defining an internal passage 14a includes a first threaded portion 14b at a first end that is coupled to the threaded counterbore 12c of the first tubular support member 12, a stepped flange 14c, a counterbore 14d, a threaded portion 14e, and internal splines 14f at another end. The stepped flange 14c of the second
30 tubular support member 14 further defines radial passages 14g, 14h, 14i, and 14j. A third tubular support member 16 defining an internal passage 16a for receiving the second tubular support member 14 includes a first flange 16b, a

second flange 16c, a first counterbore 16d, a second counterbore 16e having an internally threaded portion 16f, and an internal flange 16g. The second flange 16c further includes radial passages 16h and 16i.

An annular expansion cone 18 defining an internal passage 18a for
5 receiving the second and third tubular support members, 14 and 16, includes a counterbore 18b at one end, and a counterbore 18c at another end for receiving the flange 16b of the second tubular support member 16. The annular expansion cone 18 further includes an end face 18d that mates with an end face 16j of the flange 16c of the second tubular support member 16, and an exterior
10 surface 18e having a conical shape in order to facilitate the radial expansion of tubular members. A tubular expansion cone launcher 20 is movably coupled to the exterior surface 18e of the expansion cone 18 and includes a first portion 20a having a first wall thickness, a second portion 20b having a second wall thickness, a threaded portion 20c at one end, and a threaded portion 20d at
15 another end. In a preferred embodiment, the second portion 20b of the expansion cone launcher 20 mates with the conical outer surface 18e of the expansion cone 18. In a preferred embodiment, the second wall thickness is less than the first wall thickness in order to optimize the radial expansion of the expansion cone launcher 20 by the relative axial displacement of the expansion
20 cone 18. In a preferred embodiment, one or more expandable tubulars are coupled to the threaded connection 20c of the expansion cone launcher 20. In this manner, the assembly 10 may be used to radially expand and plastically deform, for example, thousands of feet of expandable tubulars.

An annular spacer 22 defining an internal passage 22a for receiving the
25 second tubular support member 14 is received within the counterbore 18b of the expansion cone 18, and is positioned between an end face 12d of the first tubular support member 12 and an end face of the counterbore 18b of the expansion cone 18. A fourth tubular support member 24 defining an internal passage 24a for receiving the second tubular support member 14 includes a
30 flange 24b that is received within the counterbore 16d of the third tubular support member 16. A fifth tubular support member 26 defining an internal passage 26a for receiving the second tubular support member 14 includes an

internal flange 26b for mating with the flange 14c of the second tubular support member and a flange 26c for mating with the internal flange 16g of the third tubular support member 16.

An annular sealing member 28, an annular sealing and support member 5 30, an annular sealing member 32, and an annular sealing and support member 34 are received within the counterbore 14d of the second tubular support member 14. The annular sealing and support member 30 further includes a radial opening 30a for supporting a rupture disc 36 within the radial opening 14g of the second tubular support member 14 and a sealing member 30b for 10 sealing the radial opening 14h of the second tubular support member. The annular sealing and support member 34 further includes sealing members 34a and 34b for sealing the radial openings 14i and 14j, respectively, of the second tubular support member 14. In an exemplary embodiment, the rupture disc 36 opens when the operating pressure within the radial opening 30b is about 1000 15 to 5000 psi. In this manner, the rupture disc 36 provides a pressure sensitive valve for controlling the flow of fluidic materials through the radial opening 30a. In several alternative embodiments, the assembly 10 includes a plurality of radial passages 30a, each with corresponding rupture discs 36.

A sixth tubular support member 38 defining an internal passage 38a for 20 receiving the second tubular support member 14 includes a threaded portion 38b at one end that is coupled to the threaded portion 16f of the third tubular support member 16 and a flange 38c at another end that is movably coupled to the interior of the expansion cone launcher 20. An annular collet 40 includes a threaded portion 40a that is coupled to the threaded portion 14e of the second 25 tubular support member 14, and a resilient coupling 40b at another end.

An annular sliding sleeve 42 defining an internal passage 42a includes an internal flange 42b, having sealing members 42c and 42d, and an external groove 42e for releasably engaging the coupling 40b of the collet 40 at one end, 30 and an internal flange 42f, having sealing members 42g and 42h, at another end. During operation the coupling 40b of the collet 40 may engage the external groove 42e of the sliding sleeve 42 and thereby displace the sliding sleeve in the longitudinal direction. Since the coupling 40b of the collet 40 is

resilient, the collet 40 may be disengaged or reengaged with the sliding sleeve 42. An annular valve member 44 defining an internal passage 44a, having a first throat 44aa and a second throat 44ab, includes a flange 44b at one end, having external splines 44c for engaging the internal splines 14f of the second tubular support member 14, a first set of radial passages, 44da and 44db, a second set of radial passages, 44ea and 44eb, and a threaded portion 44f at another end. The sliding sleeve 42 and the valve member 44 define an annular bypass passage 46 that, depending upon the position of the sliding sleeve 42, permits fluidic materials to flow from the passage 44 through the first radial passages, 44da and 44db, the bypass passage 46, and the second radial passages, 44ea and 44eb, back into the passage 44. In this manner, fluidic materials may bypass the portion of the passage 44 between the first and second radial passages, 44ea, 44eb, 44da, and 44db. Furthermore, the sliding sleeve 42 and the valve member 44 together define a sliding sleeve valve for controllably permitting fluidic materials to bypass the intermediate portion of the passage 44a between the first and second passages, 44da, 44db, 44ea, and 44eb. During operation, the flange 44b limits movement of the sliding sleeve 42 in the longitudinal direction.

In a preferred embodiment, the collet 40 includes a set of couplings 40b such as, for example, fingers, that engage the external groove 42e of the sliding sleeve 42. During operation, the collet couplings 40b latch over and onto the external groove 42e of the sliding sleeve 42. In a preferred embodiment, a longitudinal force of at least about 10,000 to 13,000 lbf is required to pull the couplings 40b off of, and out of engagement with, the external groove 42e of the sliding sleeve 42. In an exemplary embodiment, the application of a longitudinal force less than about 10,000 to 13,000 lbf indicates that the collet couplings 40b are latched onto the external shoulder of the sliding sleeve 42, and that the sliding sleeve 42 is in the up or the down position relative to the valve member 44. In a preferred embodiment, the collet 40 includes a conventional internal shoulder that transfers the weight of the first tubular support member 12 and expansion cone 18 onto the sliding sleeve 42. In a

preferred embodiment, the collet 40 further includes a conventional set of internal lugs for engaging the splines 44c of the valve member 44.

An annular valve seat 48 defining a conical internal passage 48a for receiving a conventional float valve element 50 includes an annular recess 48b, 5 having an internally threaded portion 48c for engaging the threaded portion 44f of the valve member 44, at one end, and an externally threaded portion 48d at another end. In an alternative embodiment, the float valve element 50 is omitted. An annular valve seat mounting element 52 defining an internal passage 52a for receiving the valve seat 48 and float valve 50 includes an 10 internally threaded portion 52b for engaging the externally threaded portion 48d of the valve seat 48, an externally threaded portion 52c, an internal flange 52d, radial passages, 52ea and 52eb, and an end member 52f, having axial passages, 52fa and 52fb.

A shoe 54 defining an internal passage 54a for receiving the valve seat 15 mounting element 52 includes a first annular recess 54b, having an externally threaded portion 54c, and a second annular recess 54d, having an externally threaded portion 54e for engaging the threaded portion 20d of the expansion cone launcher 20, at one end, a first threaded counterbore 54f for engaging the threaded portion 52c of the of the mounting element, and a second counterbore 20 54g for mating with the end member 52f of the mounting element. In a preferred embodiment, the shoe 54 is fabricated from a ceramic and/or a composite material in order to facilitate the subsequent removal of the shoe by drilling. A seventh tubular support member 56 defining an internal passage 56a for receiving the sliding sleeve 42 and the valve member 44 is positioned 25 within the expansion cone launcher 20 that includes an internally threaded portion 56b at one end for engaging the externally threaded portion 54c of the annular recess 54b of the shoe 54. In a preferred embodiment, during operation of the assembly, the end of the seventh tubular support member 56 limits the longitudinal movement of the expansion cone 18 in the direction of the shoe 54 30 by limiting the longitudinal movement of the sixth tubular support member 38. An annular centralizer 58 defining an internal passage 58a for movably supporting the sliding sleeve 42 is positioned within the seventh tubular

support member 56 that includes axial passages 58b and 58c. In a preferred embodiment, the centralizer 58 maintains the sliding sleeve 42 and valve member 44 in a central position within the assembly 10.

Referring to Figs. 2a-2b, during operation, the assembly 10 may be used to form or repair a wellbore casing by implementing a method 200 in which, as illustrated in Figs. 3a-3c, the assembly 10 may initially be positioned within a wellbore 100 having a preexisting wellbore casing 102 by coupling a conventional tubular member 104 defining an internal passage 104a to the threaded portion 12b of the first tubular support member 12 in step 202. In a preferred embodiment, during placement of the assembly 10 within the wellbore 100, fluidic materials 106 within the wellbore 100 below the assembly 10 are conveyed through the assembly 10 and into the passage 104a by the fluid passages 52fa, 52fb, 54a, 48a, 44a, and 14a. In this manner, surge pressures that can be created during placement of the assembly 10 within the wellbore 100 are minimized. In a preferred embodiment, the float valve element 50 is pre-set in an auto-fill configuration to permit the fluidic materials 106 to pass through the conical passage 48a of the valve seat 48.

Referring to Figs. 4a-4c, in step 204, fluidic materials 108 may then be injected into and through the tubular member 104 and assembly 10 to thereby ensure that all of the fluid passages 104a, 14a, 44a, 48a, 54a, 52fa, and 52fb are functioning properly.

Referring to Figs. 5a-5c, in step 206, a bottom plug 110 may then be injected into the fluidic materials 108 and into the assembly 10 and then positioned in the throat passage 44ab of the valve member 44. In this manner, the region of the passage 44a upstream from the plug 110 may be fluidically isolated from the region of the passage 44a downstream from the plug 110. In a preferred embodiment, the proper placement of the plug 110 may be indicated by a corresponding increase in the operating pressure of the fluidic material 108.

Referring to Figs. 6a-6c, in step 208, the sliding sleeve 42 may then be displaced relative to the valve member 44 by displacing the tubular member 104 by applying, for example, a downward force of approximately 5,000 lbf on the

assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the rupture disc 36 is fluidically isolated from the passages 14a and 44a.

Referring to Figs. 7a-7c, in step 210, a hardenable fluidic sealing material 112 may then be injected into the assembly 10 and conveyed through the passages 104a, 14a, 44a, 44da, 44db, 46, 44ea, 44eb, 48a, 54a, 52fa, and 52fb into the wellbore 100. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 20 and the wellbore 100 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 20. Furthermore, in this manner, the radial passage 30a and the rupture disc 36 are not exposed to the hardenable fluidic sealing material 112.

Referring to Figs. 8a-8c, in step 212, upon the completion of the injection of the hardenable fluidic sealing material 112, a nonhardenable fluidic material 114 may be injected into the assembly 10, and a top plug 116 may then be injected into the assembly 10 along with the fluidic materials 114 and then positioned in the throat passage 44aa of the valve member 44. In this manner, the region of the passage 44a upstream from the first passages, 44da and 44db, may be fluidically isolated from the first passages. In a preferred embodiment, the proper placement of the plug 116 may be indicated by a corresponding increase in the operating pressure of the fluidic material 114.

Referring to Fig. 9a-9c, in step 214, the sliding sleeve 42 may then be displaced relative to the valve member 44 by displacing the tubular member 104

by applying, for example, an upward force of approximately 13,000 lbf on the assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may no longer bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the rupture disc 36 is no longer fluidically isolated from the fluid passages 14a and 44a.

Referring to Figs. 10a-10c, in step 216, the fluidic material 114 may be injected into the assembly 10. The continued injection of the fluidic material 114 may increase the operating pressure within the passages 14a and 44a until the burst disc 36 is opened thereby permitting the pressurized fluidic material 114 to pass through the radial passage 30a and into an annular region 118 defined by the second tubular support member 14, the third tubular support member 16, the sixth tubular support member 38, the collet 40, the sliding sleeve 42, the shoe 54, and the seventh tubular support member 56. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby radially expanding and plastically deforming the expansion cone launcher.

In an alternative embodiment of the method 200, the injection and placement of the top plug 116 into the liner hanger assembly 10 in step 212 may be omitted.

In an alternative embodiment of the method 200, in step 202, the assembly 10 is positioned at the bottom of the wellbore 100.

In an alternative embodiment, as illustrated in Figs. 11a-11b, during operation, the assembly 10 may be used to form or repair a wellbore casing by implementing a method 250 in which, as illustrated in Figs. 3a-3c, the assembly 10 may initially be positioned within a wellbore 100 having a preexisting wellbore casing 102 by coupling a conventional tubular member 104 defining an internal passage 104a to the threaded portion 12b of the first tubular support member 12 in step 252. In a preferred embodiment, during placement of the assembly 10 within the wellbore 100, fluidic materials 106 within the wellbore 100 below the assembly 10 are conveyed through the assembly 10 and into the passage 104a by the fluid passages 52fa, 52fb, 54a, 48a, 44a, and 14a. In this manner, surge pressures that can be created during placement of the assembly 10 within the wellbore 100 are minimized. In a preferred embodiment, the float valve element 50 is pre-set in an auto-fill configuration to permit the fluidic materials 106 to pass through the conical passage 48a of the valve seat 48.

Referring to Figs. 4a-4c, in step 254, fluidic materials 108 may then be injected into and through the tubular member 104 and assembly 10 to thereby ensure that all of the fluid passages 104a, 14a, 44a, 48a, 54a, 52fa, and 52fb are functioning properly.

Referring to Figs. 5a-5c, in step 256, the bottom plug 110 may then be injected into the fluidic materials 108 and into the assembly 10 and then positioned in the throat passage 44ab of the valve member 44. In this manner, the region of the passage 44a upstream from the plug 110 may be fluidically isolated from the region of the passage 44a downstream from the plug 110. In a preferred embodiment, the proper placement of the plug 110 may be indicated by a corresponding increase in the operating pressure of the fluidic material 108.

Referring to Figs. 12a-12c, in step 258, a fluidic material 114 may then be injected into the assembly to thereby increase the operating pressure within the passages 14a and 44a until the burst disc 36 is opened thereby permitting the pressurized fluidic material 114 to pass through the radial passage 30a and into an annular region 118 defined by the second tubular support member 14, the third tubular support member 16, the sixth tubular support member 38, the

collet 40, the sliding sleeve 42, the shoe 54, and the seventh tubular support member 56. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby disengaging the collet 40 and the sliding sleeve 42 and radially expanding and plastically deforming the expansion cone launcher. In a preferred embodiment, the radial expansion process in step 408 is continued to a location below the overlap between the expansion cone launcher 20 and the preexisting wellbore casing 102.

Referring to Figs. 13a-13c, in step 260, the sliding sleeve 42 may then be displaced relative to the valve member 44 by (1) displacing the expansion cone 18 in a downward direction using the tubular member 104 and (2) applying, using the tubular member 104 a downward force of, for example, approximately 5,000 lbf on the assembly 10. In this manner, the coupling 40b of the collet 40 reengages the external groove 42e of the sliding sleeve 42. Furthermore, in this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the fluid passage 30a is fluidically isolated from the passages 14a and 44a.

Referring to Figs. 14a-14c, in step 262, the hardenable fluidic sealing material 112 may then be injected into the assembly 10 and conveyed through the passages 104a, 14a, 44a, 44da, 44db, 46, 44ea, 44eb, 48a, 54a, 52fa, and 52fb

into the wellbore 100. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 20 and the wellbore 100 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 20. Furthermore, in this manner, the radial passage 30a and the rupture disc 36 are not exposed to the hardenable fluidic sealing material 112.

Referring to Figs. 16a-16c, in step 264, upon the completion of the injection of the hardenable fluidic sealing material 112, the nonhardenable fluidic material 114 may be injected into the assembly 10, and the top plug 116 may then be injected into the assembly 10 along with the fluidic materials 114 and then positioned in the throat passage 44aa of the valve member 44. In this manner, the region of the passage 44a upstream from the first passages, 44da and 44db, may be fluidically isolated from the first passages. In a preferred embodiment, the proper placement of the plug 116 may be indicated by a corresponding increase in the operating pressure of the fluidic material 114.

Referring to Figs. 16a-16c, in step 266, the sliding sleeve 42 may then be displaced relative to the valve member 44 by displacing the tubular member 104 by applying, for example, an upward force of approximately 13,000 lbf on the assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may no longer bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the passage 30a is no longer fluidically isolated from the fluid passages 14a and 44a.

Referring to Figs. 17a-17c, in step 268, the fluidic material 114 may be injected into the assembly 10. The continued injection of the fluidic material

114 may increase the operating pressure within the passages 14a, 30a, and 44a and the annular region 118. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal
5 force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby completing the radial expansion of the expansion cone launcher.

In an alternative embodiment of the method 250, the injection and placement of the top plug 116 into the liner hanger assembly 10 in step 264
10 may omitted.

In an alternative embodiment of the method 250, in step 252, the assembly 10 is positioned at the bottom of the wellbore 100.

In an alternative embodiment of the method 250: (1) in step 252, the assembly 10 is positioned proximate a position below a preexisting section of
15 the wellbore casing 102, and (2) in step 258, the expansion cone launcher 20, and any expandable tubulars coupled to the threaded portion 20c of the expansion cone launcher, are radially expanded and plastically deformed until the shoe 54 of the assembly 10 is proximate the bottom of the wellbore 100. In this manner, the radial expansion process using the assembly 10 provides a
20 telescoping of the radially expanded tubulars into the wellbore 100.

In several alternative embodiments, the assembly 10 may be operated to form a wellbore casing by including or excluding the float valve 50.

In several alternative embodiments, the float valve 50 may be operated in an auto-fill configuration in which tabs are positioned between the float valve
25 50 and the valve seat 48. In this manner, fluidic materials within the wellbore 100 may flow into the assembly 10 from below thereby decreasing surge pressures during placement of the assembly 10 within the wellbore 100. Furthermore, pumping fluidic materials through the assembly 10 at rate of about 6 to 8 bbl/min will displace the tabs from the valve seat 48 and thereby
30 allow the float valve 50 to close.

In several alternative embodiments, prior to the placement of any of the plugs, 110 and 116, into the assembly 10, fluidic materials can be circulated through the assembly 10 and into the wellbore 100.

5 In several alternative embodiments, once the bottom plug 110 has been positioned into the assembly 10, fluidic materials can only be circulated through the assembly 10 and into the wellbore 100 if the sliding sleeve 42 is in the down position.

10 In several alternative embodiments, once the sliding sleeve 42 is positioned in the down position, the passage 30a and rupture disc 36 are fluidically isolated from pressurized fluids within the assembly 10.

In several alternative embodiments, once the top plug 116 has been positioned into the assembly 10, no fluidic materials can be circulated through the assembly 10 and into the wellbore 100.

15 In several alternative embodiments, the assembly 10 may be operated to form or repair a wellbore casing, a pipeline, or a structural support.

Referring to Figs. 18, 18a, 18b, and 18c, an alternative embodiment of a liner hanger assembly 300 includes a first tubular support member 312 defining an internal passage 312a that includes a threaded counterbore 312b at one end, and a threaded counterbore 312c at another end. A second tubular support member 314 defining an internal passage 314a includes a first threaded portion 314b at a first end that is coupled to the threaded counterbore 312c of the first tubular support member 312, a stepped flange 314c, a counterbore 314d, a threaded portion 314e, and internal splines 314f at another end. The stepped flange 314c of the second tubular support member 314 further defines radial passages 314g, 314h, 314i, and 314j.

25 A third tubular support member 316 defining an internal passage 316a for receiving the second tubular support member 314 includes a first flange 316b, a second flange 316c, a first counterbore 316d, a second counterbore 316e having an internally threaded portion 316f, and an internal flange 316g. The second flange 316c further includes radial passages 316h and 316i.

An annular expansion cone 318 defining an internal passage 318a for receiving the second and third tubular support members, 314 and 316, includes

a counterbore 318b at one end, and a counterbore 318c at another end for receiving the flange 316b of the second tubular support member 316. The annular expansion cone 318 further includes an end face 318d that mates with an end face 316j of the flange 316c of the second tubular support member 316, and an exterior surface 318e having a conical shape in order to facilitate the radial expansion of tubular members. A tubular expansion cone launcher 320 is movably coupled to the exterior surface 318e of the expansion cone 318 and includes a first portion 320a having a first wall thickness, a second portion 320b having a second wall thickness, a threaded portion 320c at one end, and a threaded portion 320d at another end. In a preferred embodiment, the second portion 320b of the expansion cone launcher 320 mates with the conical outer surface 318e of the expansion cone 318. In a preferred embodiment, the second wall thickness of the second portion 320b is less than the first wall thickness of the first portion 320a in order to optimize the radial expansion of the expansion cone launcher 320 by the relative axial displacement of the expansion cone 318. In a preferred embodiment, one or more expandable tubulars are coupled to the threaded connection 320c of the expansion cone launcher 320. In this manner, the assembly 300 may be used to radially expand and plastically deform, for example, thousands of feet of expandable tubulars.

An annular spacer 322 defining an internal passage 322a for receiving the second tubular support member 314 is received within the counterbore 318b of the expansion cone 318, and is positioned between an end face 312d of the first tubular support member 312 and an end face of the counterbore 318b of the expansion cone 318. A fourth tubular support member 324 defining an internal passage 324a for receiving the second tubular support member 314 includes a flange 324b that is received within the counterbore 316d of the third tubular support member 316. A fifth tubular support member 326 defining an internal passage 326a for receiving the second tubular support member 314 includes an internal flange 326b for mating with the flange 314c of the second tubular support member and a flange 326c for mating with the internal flange 316g of the third tubular support member 316.

An annular sealing member 328, an annular sealing and support member 330, an annular sealing member 332, and an annular sealing and support member 334 are received within the counterbore 314d of the second tubular support member 314. The annular sealing and support member 330 further includes a radial opening 330a for supporting a rupture disc 336 within the radial opening 314g of the second tubular support member 314 and a sealing member 330b for sealing the radial opening 314h of the second tubular support member. The annular sealing and support member 334 further includes sealing members 334a and 334b for sealing the radial openings 314i and 314j, respectively, of the second tubular support member 314. In an exemplary embodiment, the rupture disc 336 opens when the operating pressure within the radial opening 330b is about 1000 to 5000 psi. In this manner, the rupture disc 336 provides a pressure sensitive valve for controlling the flow of fluidic materials through the radial opening 330a. In several alternative embodiments, the assembly 300 includes a plurality of radial passages 330a, each with corresponding rupture discs 336.

A sixth tubular support member 338 defining an internal passage 338a for receiving the second tubular support member 314 includes a threaded portion 338b at one end that is coupled to the threaded portion 316f of the third tubular support member 316 and a flange 338c at another end that is movably coupled to the interior of the expansion cone launcher 320. An annular collet 340 includes a threaded portion 340a that is coupled to the threaded portion 314e of the second tubular support member 314, and a resilient coupling 340b at another end.

An annular sliding sleeve 342 defining an internal passage 342a includes an internal flange 342b, having sealing members 342c and 342d, and an external groove 342e for releasably engaging the coupling 340b of the collet 340 at one end, and an internal flange 342f, having sealing members 342g and 342h, at another end. During operation, the coupling 340b of the collet 340 may engage the external groove 342e of the sliding sleeve 342 and thereby displace the sliding sleeve in the longitudinal direction. Since the coupling 340b of the collet 340 is resilient, the collet 340 may be disengaged or reengaged with the

sliding sleeve 342. An annular valve member 344 defining an internal passage 344a, having a throat 344aa, includes a flange 344b at one end, having external splines 344c for engaging the internal splines 314f of the second tubular support member 314, an interior flange 344d having a first set of radial passages, 344da and 344db, and a counterbore 344e, a second set of radial passages, 344fa and 344fb, and a threaded portion 344g at another end.

An annular valve member 346 defining an internal passage 346a, having a throat 346aa, includes an end portion 346b that is received in the counterbore 344e of the annular valve member 344, a set of radial openings, 346ca and 346cb, and a flange 346d at another end. An annular valve member 348 defining an internal passage 348a for receiving the annular valve members 344 and 346 includes a flange 348b having a threaded counterbore 348c at one end for engaging the threaded portion 344g of the annular valve member, a counterbore 348d for mating with the flange 346d of the annular valve member, and a threaded annular recess 348e at another end.

The annular valve members 344, 346, and 348 define an annular passage 350 that fluidically couples the radial passages 344fa, 344fb, 346ca, and 346cb. Furthermore, depending upon the position of the sliding sleeve 342, the fluid passages, 344da and 344db, may be fluidically coupled to the passages 344fa, 344fb, 346ca, 346cb, and 350. In this manner, fluidic materials may bypass the portion of the passage 346a between the passages 344da, 344db, 346ca, and 346cb. Furthermore, the sliding sleeve 342 and the valve members 344, 346, and 348 together define a sliding sleeve valve for controllably permitting fluidic materials to bypass the intermediate portion of the passage 346a between the passages, 344da, 344db, 346ca, and 346cb. During operation of the sliding sleeve valve, the flange 348b limits movement of the sliding sleeve 342 in the longitudinal direction.

In a preferred embodiment, the collet 340 includes a set of couplings 340b that engage the external groove 342e of the sliding sleeve 342. During operation, the collet couplings 340b latch over and onto the external groove 342e of the sliding sleeve 342. In a preferred embodiment, a longitudinal force of at least about 10,000 to 13,000 lbf is required to pull the couplings 340b off

of, and out of engagement with, the external groove 342e of the sliding sleeve 342. In an exemplary embodiment, the application of a longitudinal force less than about 10,000 to 13,000 lbf indicates that the collet couplings 340b are latched onto the external shoulder of the sliding sleeve 342, and that the sliding sleeve 342 is in the up or the down position relative to the valve member 344. In a preferred embodiment, the collet 340 includes a conventional internal shoulder that transfers the weight of the first tubular support member 312 and expansion cone 318 onto the sliding sleeve 342. In a preferred embodiment, the collet 340 further includes a conventional set of internal lugs for engaging the splines 344c of the valve member 344.

An annular valve seat 352 defining a conical internal passage 352a for receiving a conventional float valve element 354 includes a threaded annular recess 352b for engaging the threaded portion 348e of the valve member 348, at one end, and an externally threaded portion 352c at another end. In an alternative embodiment, the float valve element 354 is omitted. An annular valve seat mounting element 356 defining an internal passage 356a for receiving the valve seat 352 and float valve 354 includes an internally threaded portion 356b for engaging the externally threaded portion 352c of the valve seat 352, an externally threaded portion 356c, an internal flange 356d, radial passages, 356ea and 356eb, and an end member 356f, having axial passages, 356fa and 356fb.

A shoe 358 defining an internal passage 358a for receiving the valve seat mounting element 356 includes a first threaded annular recess 358b, and a second threaded annular recess 358c for engaging the threaded portion 320d of the expansion cone launcher 320, at one end, a first threaded counterbore 358d for engaging the threaded portion 356c of the of the valve seat mounting element, and a second counterbore 358e for mating with the end member 356f of the mounting element. In a preferred embodiment, the shoe 358 is fabricated from a ceramic and/or a composite material in order to facilitate the subsequent removal of the shoe by drilling.

A seventh tubular support member 360 defining an internal passage 360a for receiving the sliding sleeve 342 and the valve members 344, 346, and

348 is positioned within the expansion cone launcher 320 that includes an internally threaded portion 360b at one end for engaging the externally threaded portion of the annular recess 358b of the shoe 358. In a preferred embodiment, during operation of the assembly, the end of the seventh tubular support member 360 limits the longitudinal movement of the expansion cone 318 in the direction of the shoe 358 by limiting the longitudinal movement of the sixth tubular support member 338. An annular centralizer 362 defining an internal passage 362 for supporting the valve member 348 is positioned within the seventh tubular support member 360 that includes axial passages 362b and 362c.

Referring to Figs. 19a-19b, during operation, the assembly 300 may be used to form or repair a wellbore casing by implementing a method 400 in which, as illustrated in Figs. 20a-20c, the assembly 300 may initially be positioned within a wellbore 1000 having a preexisting wellbore casing 1002 by coupling a conventional tubular member 1004 defining an internal passage 1004a to the threaded portion 312b of the first tubular support member 312 in step 402. In a preferred embodiment, during placement of the assembly 300 within the wellbore 1000, fluidic materials 1006 within the wellbore 1000 below the assembly 300 are conveyed through the assembly 300 and into the passage 1004a by the fluid passages 356fa, 356fb, 352a, 348a, 346a, 344a, and 314a. In this manner, surge pressures that can be created during placement of the assembly 300 within the wellbore 1000 are minimized. In a preferred embodiment, the float valve element 354 is pre-set in an auto-fill configuration to permit the fluidic materials 1006 to pass through the conical passage 352a of the valve seat 352.

Referring to Figs. 21a-21c, in step 404, fluidic materials 1008 may then be injected into and through the tubular member 1004 and assembly 300 to thereby ensure that all of the fluid passages 1004a, 314a, 344a, 346a, 348a, 352a, 356fa, and 356fb are functioning properly.

Referring to Figs. 22a-22c, in step 406, a bottom plug 1010 may then be injected into the fluidic materials 1008 and into the assembly 300 and then positioned in the throat passage 346aa of the valve member 346. In this

manner, the region of the passage 346a upstream from the plug 1010 may be fluidically isolated from the region of the passage 346a downstream from the plug 1010. In a preferred embodiment, the proper placement of the plug 1010 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1008.

Referring to Figs. 23a-23c, in step 408, the sliding sleeve 342 may then be displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, a downward force of approximately 5,000 lbf on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the plug 1010 may bypass the plug by passing through the first passages, 344da and 344db, through the annular passage 342a, through the second passages, 344fa and 344fb, through the annular passage 350, through the passages, 346ca and 346cb, into the region of the passage 348a downstream from the plug. Furthermore, in this manner, the rupture disc 336 is fluidically isolated from the passages 314a and 344a.

Referring to Figs. 24a-24c, in step 410, a hardenable fluidic sealing material 1012 may then be injected into the assembly 300 and conveyed through the passages 1004a, 314a, 344a, 344da, 344db, 342a, 344fa, 344fb, 350, 346ca, 346cb, 348a, 352a, 356fa, and 356fb into the wellbore 1000. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 320 and the wellbore 1000 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 320. Furthermore, in this manner, the radial passage 330a and the rupture disc 336 are not exposed to the hardenable fluidic sealing material 1012.

Referring to Figs. 25a-25c, in step 412, upon the completion of the injection of the hardenable fluidic sealing material 1012, a nonhardenable fluidic material 1014 may be injected into the assembly 300, and a top plug 1016 may then be injected into the assembly 300 along with the fluidic materials 1014 and then positioned in the throat passage 344aa of the valve member 344. In this manner, the region of the passage 344a upstream from the top plug 1016 may be fluidically isolated from region downstream from the top plug. In a preferred embodiment, the proper placement of the plug 1016 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1014.

Referring to Fig. 26a-26c, in step 414, the sliding sleeve 42 may then be displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, an upward force of approximately 13,000 lbf on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the bottom plug 1010 may no longer bypass the bottom plug by passing through the first passages, 344da and 344db, through the annular passage 342a, through the second passages, 344fa and 344fb, through the annular passage 350, and through the passages, 346ca and 346cb, into region of the passage 348a downstream from the bottom plug. Furthermore, in this manner, the rupture disc 336 is no longer fluidically isolated from the fluid passages 314a and 344a.

Referring to Figs. 27a-27c, in step 416, the fluidic material 1014 may be injected into the assembly 300. The continued injection of the fluidic material 1014 may increase the operating pressure within the passages 314a and 344a until the burst disc 336 is opened thereby permitting the pressurized fluidic material 1014 to pass through the radial passage 330a and into an annular

region 1018 defined by the second tubular support member 314, the third
tubular support member 316, the sixth tubular support member 338, the collet
340, the sliding sleeve 342, the valve members, 344 and 348, the shoe 358, and
the seventh tubular support member 360. The pressurized fluidic material
5 1014 within the annular region 1018 directly applies a longitudinal force upon
the fifth tubular support member 326 and the sixth tubular support member
338. The longitudinal force in turn is applied to the expansion cone 318. In
this manner, the expansion cone 318 is displaced relative to the expansion cone
launcher 320 thereby radially expanding and plastically deforming the
10 expansion cone launcher.

In an alternative embodiment of the method 400, the injection and
placement of the top plug 1016 into the liner hanger assembly 300 in step 412
may omitted.

In an alternative embodiment of the method 400, in step 402, the
15 assembly 300 is positioned at the bottom of the wellbore 1000.

In an alternative embodiment, as illustrated in Figs. 28a-28b, during
operation, the assembly 300 may be used to form or repair a wellbore casing by
implementing a method 450 in which, as illustrated in Figs. 20a-20c, the
assembly 300 may initially be positioned within a wellbore 1000 having a
20 preexisting wellbore casing 1002 by coupling a conventional tubular member
1004 defining an internal passage 1004a to the threaded portion 312b of the
first tubular support member 312 in step 452. In a preferred embodiment,
during placement of the assembly 300 within the wellbore 1000, fluidic
materials 1006 within the wellbore 1000 below the assembly 300 are conveyed
25 through the assembly 300 and into the passage 1004a by the fluid passages
356fa, 356fb, 352a, 348a, 346a, 344a, and 314a. In this manner, surge pressures
that can be created during placement of the assembly 300 within the wellbore
1000 are minimized. In a preferred embodiment, the float valve element 354 is
pre-set in an auto-fill configuration to permit the fluidic materials 1006 to pass
30 through the conical passage 352a of the valve seat 352.

Referring to Figs. 21a-21c, in step 454, in step 454, fluidic materials 1008
may then be injected into and through the tubular member 1004 and assembly

300 to thereby ensure that all of the fluid passages 1004a, 314a, 344a, 346a, 348a, 352a, 356fa, and 356fb are functioning properly.

Referring to Figs. 22a-22c, in step 456, the bottom plug 1010 may then be injected into the fluidic materials 1008 and into the assembly 300 and then positioned in the throat passage 346aa of the valve member 346. In this manner, the region of the passage 346a upstream from the plug 1010 may be fluidically isolated from the region of the passage 346a downstream from the plug 1010. In a preferred embodiment, the proper placement of the plug 1010 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1008.

Referring to Figs. 29a-29c, in step 458, the fluidic material 1014 may then be injected into the assembly 300 to thereby increase the operating pressure within the passages 314a and 344a until the burst disc 336 is opened thereby permitting the pressurized fluidic material 1014 to pass through the radial passage 330a and into an annular region 1018 defined by the defined by the second tubular support member 314, the third tubular support member 316, the sixth tubular support member 338, the collet 340, the sliding sleeve 342, the valve members, 344 and 348, the shoe 358, and the seventh tubular support member 360. The pressurized fluidic material 1014 within the annular region 1018 directly applies a longitudinal force upon the fifth tubular support member 326 and the sixth tubular support member 338. The longitudinal force in turn is applied to the expansion cone 318. In this manner, the expansion cone 318 is displaced relative to the expansion cone launcher 320 thereby disengaging the collet 340 and the sliding sleeve 342 and radially expanding and plastically deforming the expansion cone launcher. In a preferred embodiment, the radial expansion process in step 458 is continued to a location below the overlap between the expansion cone launcher 320 and the preexisting wellbore casing 1002.

Referring to Figs. 30a-30c, in step 460, the sliding sleeve 342 may then be displaced relative to the valve member 344 by (1) displacing the expansion cone 318 in a downward direction using the tubular member 1004 and (2) applying, using the tubular member 1004 a downward force of, for example,

approximately 5,000 lbf on the assembly 300. In this manner, the coupling 340b of the collet 340 reengages the external groove 342e of the sliding sleeve 342. Furthermore, in this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third 5 tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials 10 within the passage 344a upstream of the bottom plug 1010 may bypass the plug by passing through the passages, 344da and 344db, the annular passage 342a, the passages, 344fa and 344fb, the annular passage 350, and the passages, 346ca and 346cb, into the passage 348a downstream from the plug. Furthermore, in this manner, the fluid passage 330a is fluidically isolated from 15 the passages 314a and 344a.

Referring to Figs. 31a-31c, in step 462, the hardenable fluidic sealing material 1012 may then be injected into the assembly 300 and conveyed through the passages 1004a, 314a, 344a, 344da, 344db, 342, 344fa, 344fb, 350, 346ca, 346cb, 348a, 352b, 356fa, and 356fb into the wellbore 1000. In this 20 manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 320 and the wellbore 1000 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 320. Furthermore, in this manner, the radial passage 330a and the rupture disc 336 25 are not exposed to the hardenable fluidic sealing material 1012.

Referring to Figs. 32a-32c, in step 464, upon the completion of the injection of the hardenable fluidic sealing material 1012, the nonhardenable fluidic material 1014 may be injected into the assembly 300, and the top plug 1016 may then be injected into the assembly 300 along with the fluidic 30 materials 1014 and then positioned in the throat passage 344aa of the valve member 344. In this manner, the region of the passage 344a upstream from the top plug 1016 may be fluidically isolated from the region within the passage

downstream from the top plug. In a preferred embodiment, the proper placement of the plug 1016 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1014.

Referring to Figs. 33a-33c, in step 466, the sliding sleeve 342 may then be displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, an upward force of approximately 13,000 lbf on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the bottom plug 110 may no longer bypass the plug by passing through the passages, 344da and 344db, the annular passage 342a, the passages, 344fa and 344fb, the annular passage 350, and the passages, 346ca and 346cb, into the passage 348a downstream from the plug. Furthermore, in this manner, the passage 330a is no longer fluidically isolated from the fluid passages 314a and 344a.

Referring to Figs. 34a-34c, in step 468, the fluidic material 1014 may be injected into the assembly 300. The continued injection of the fluidic material 1014 may increase the operating pressure within the passages 314a, 330a, and 344a and the annular region 1018. The pressurized fluidic material 1014 within the annular region 1018 directly applies a longitudinal force upon the fifth tubular support member 326 and the sixth tubular support member 338. The longitudinal force in turn is applied to the expansion cone 318. In this manner, the expansion cone 318 is displaced relative to the expansion cone launcher 320 thereby completing the radial expansion of the expansion cone launcher.

In an alternative embodiment of the method 450, the injection and placement of the top plug 1016 into the liner hanger assembly 300 in step 464 may omitted.

In an alternative embodiment of the method 450, in step 452, the assembly 300 is positioned at the bottom of the wellbore 1000.

In an alternative embodiment of the method 450: (1) in step 452, the assembly 300 is positioned proximate a position below a preexisting section of the wellbore casing 1002, and (2) in step 458, the expansion cone launcher 320, and any expandable tubulars coupled to the threaded portion 320c of the expansion cone launcher, are radially expanded and plastically deformed until the shoe 358 of the assembly 300 is proximate the bottom of the wellbore 1000. In this manner, the radial expansion process using the assembly 300 provides a telescoping of the radially expanded tubulars into the wellbore 1000.

In several alternative embodiments, the assembly 300 may be operated to form a wellbore casing by including or excluding the float valve 354.

In several alternative embodiments, the float valve 354 may be operated in an auto-fill configuration in which tabs are positioned between the float valve 354 and the valve seat 352. In this manner, fluidic materials within the wellbore 1000 may flow into the assembly 300 from below thereby decreasing surge pressures during placement of the assembly 300 within the wellbore 1000. Furthermore, pumping fluidic materials through the assembly 300 at rate of about 6 to 8 bbl/min will displace the tabs from the valve seat 352 and thereby allow the float valve 354 to close.

In several alternative embodiments, prior to the placement of any of the plugs, 1010 and 1016, into the assembly 300, fluidic materials can be circulated through the assembly 300 and into the wellbore 1000.

In several alternative embodiments, once the bottom plug 1010 has been positioned into the assembly 300, fluidic materials can only be circulated through the assembly 300 and into the wellbore 1000 if the sliding sleeve 342 is in the down position.

In several alternative embodiments, once the sliding sleeve 342 is positioned in the down position, the passage 330a and rupture disc 336 are fluidically isolated from pressurized fluids within the assembly 300.

In several alternative embodiments, once the top plug 1016 has been positioned into the assembly 300, no fluidic materials can be circulated through the assembly 300 and into the wellbore 1000.

In several alternative embodiments, the assembly 300 may be operated to form or
5 repair a wellbore casing, a pipeline, or a structural support.

In a preferred embodiment, the design and operation of the liner hanger assemblies 10 and 300 are provided substantially as described and illustrated in Appendix A to the present application.

In a preferred embodiment, the design and operation of the liner hanger assemblies
10 10 and 300 are provided substantially as described in one or more of the following: (1) U.S. patent 6,497,289, (2) Australian patent AU 770008, (3) U.S. patent 6,823,937, (4) U.S. patent 6,328,113, (5) U.S. patent 6,640,903, (6) U.S. patent 6,568,471, (7) U.S. patent 6,575,240, (8) U.S. patent 6,557,640, (9) U.S. patent 6,604,763, (10) International patent application WO 01/04535, (11) Australian patent AU 783245, (12) U.S. patent 6,564,875,
15 (13) U.S. patent 6,695,012, (14) U.S. patent application 2003/0107217, (15) Australian patent AU 2001269810, (16) U.S. patent application 2004/0033906, and (17) International patent application WO 02/10550, the disclosures of which are incorporated herein by reference.

A method of forming a wellbore casing within a borehole within a subterranean
20 formation has been described that includes positioning an expandable tubular member within the borehole, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and
25 second regions and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member. In an exemplary embodiment, positioning the expandable tubular member within the borehole includes positioning an end of the expandable tubular member adjacent to the bottom of the borehole. In an exemplary embodiment, the method further includes fluidically isolating the second region from a third
30 region within the expandable tubular member.

An apparatus for forming a wellbore casing within a borehole within a subterranean formation has also been described that includes means for positioning an expandable tubular member within the borehole, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member. In an exemplary embodiment, the means for positioning the expandable tubular member within the borehole includes means for positioning an end of the expandable tubular member adjacent to the bottom of the borehole. In an exemplary embodiment, the apparatus further includes means for fluidically isolating the second region from a third region within the expandable tubular member.

A method of forming a wellbore casing within a borehole within a subterranean formation has also been described that includes positioning an expandable tubular member within the borehole, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member. In an exemplary embodiment, positioning the expandable tubular member within the borehole includes positioning an end of the expandable tubular member adjacent to the bottom of the borehole. In an exemplary embodiment, positioning the expandable tubular member within the borehole includes positioning an end of the expandable tubular member adjacent to a preexisting section of wellbore casing within the borehole. In an exemplary embodiment, injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member includes injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member until an end portion of the tubular

member is positioned proximate the bottom of the borehole. In an exemplary embodiment, the method further includes fluidically isolating the second region from a third region within the expandable tubular member.

2001292695 12 Apr 2006

5 An apparatus for forming a wellbore casing within a borehole within a subterranean formation has also been described that includes means for positioning an expandable tubular member within the borehole, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the

10 tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member. In an exemplary embodiment, the means for positioning

15 the expandable tubular member within the borehole includes means for positioning an end of the expandable tubular member adjacent to the bottom of the borehole. In an exemplary embodiment, the means for positioning the expandable tubular member within the borehole includes means for positioning an end of the expandable tubular member adjacent to a preexisting section of wellbore casing within the borehole. In an exemplary

20 embodiment, the means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member includes means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member until an end portion of the tubular member is positioned proximate the bottom of the borehole. In an exemplary embodiment,

25 the apparatus further includes means for fluidically isolating the second region from a third region within the expandable tubular member.

30 An apparatus for forming a wellbore casing within a borehole within a subterranean formation has also been described that includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably

coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

An apparatus for forming a wellbore casing within a borehole in a subterranean formation has also been described that includes means for radially expanding an expandable tubular member, and means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the borehole, defining one or more passages and comprising: means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages. In an exemplary embodiment, the means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the borehole, includes a sliding sleeve valve.

A method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation has also been described in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An

annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the borehole, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member. In an exemplary embodiment, positioning the apparatus within the borehole includes positioning an end of the expandable tubular member adjacent to the bottom of the borehole. In an exemplary embodiment, the method further includes positioning a top plug in the top throat passage.

15 A method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation has also been described in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the

2001292695 12 Apr 2006

P:\OFFER\PIR\12181320 amend.doc-11/04/06

- 43 -

THIS PAGE IS INTENTIONALLY BLANK

apparatus within the borehole, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the

5 annular region to radially expand a portion of the expandable tubular member, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial

10 passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member. In an exemplary embodiment, positioning the apparatus within the borehole includes positioning an end of the expandable tubular member

15 adjacent to the bottom of the borehole. In an exemplary embodiment, positioning the apparatus within the borehole includes positioning an end of the expandable tubular member adjacent to a preexisting section of wellbore casing within the borehole. In an exemplary embodiment, injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and

20 pressure sensitive valves to radially expand a portion of the expandable tubular member includes injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the borehole. In an exemplary

25 embodiment, the method further includes positioning a top plug in the top throat passage.

A method of coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described that includes positioning an expandable tubular

30 member within the preexisting structure, injecting fluidic materials into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, fluidically coupling the first and

second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand the tubular member. In an exemplary embodiment, 5 positioning the expandable tubular member within the preexisting structure includes positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, the method further includes fluidically isolating the second region from a third region within the expandable tubular member.

10 An apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described that includes means for positioning the expandable tubular member within the preexisting structure, means for injecting fluidic materials into the expandable tubular member, means for 15 fluidically isolating a first region from a second region within the expandable tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable 20 tubular member to radially expand the tubular member. In an exemplary embodiment, the means for positioning the expandable tubular member within the preexisting structure includes means for positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, the apparatus further includes means for 25 fluidically isolating the second region from a third region within the expandable tubular member.

A method of coupling an expandable tubular member to a preexisting structure has also been described that includes positioning the expandable tubular member within the preexisting structure, injecting fluidic materials 30 into the expandable tubular member, fluidically isolating a first region from a second region within the expandable tubular member, injecting a non-hardenable fluidic material into the expandable tubular member to radially

- expand at least a portion of the tubular member, fluidically coupling the first and second regions, injecting a hardenable fluidic sealing material into the expandable tubular member, fluidically decoupling the first and second regions, and injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member. In an exemplary embodiment, positioning the expandable tubular member within the preexisting structure includes positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, positioning the expandable tubular member within the preexisting structure includes positioning an end of the expandable tubular member adjacent to a preexisting section of a structural element within the preexisting structure. In an exemplary embodiment, injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member includes injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure. In an exemplary embodiment, the method further includes fluidically isolating the second region from a third region within the expandable tubular member.

- An apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described that includes means for positioning the expandable tubular member within the preexisting structure, means for injecting fluidic materials into the expandable tubular member, means for fluidically isolating a first region from a second region within the expandable tubular member, means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member, means for fluidically coupling the first and second regions, means for injecting a hardenable fluidic sealing material into the expandable tubular member, means for fluidically decoupling the first and second regions, and means for injecting a non-hardenable fluidic material into the expandable tubular member.

member to radially expand another portion of the tubular member. In an exemplary embodiment, the means for positioning the expandable tubular member within the preexisting structure includes means for positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, the means for positioning the expandable tubular member within the preexisting structure includes means for positioning an end of the expandable tubular member adjacent to a preexisting structural element within the preexisting structure. In an exemplary embodiment, the means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member includes means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure. In an exemplary embodiment, the apparatus further includes means for fluidically isolating the second region from a third region within the expandable tubular member.

An apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described that includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the

region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

An apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described that includes means for radially expanding an expandable tubular member, and means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the preexisting structure, defining one or more passages and comprising: means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages. In an exemplary embodiment, the means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages, includes a sliding sleeve valve.

A method of operating an apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the preexisting structure, injecting fluidic materials into the first, second and third fluid passages, positioning a bottom plug in the bottom

throat passage, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member. In an exemplary embodiment, positioning the apparatus within the preexisting structure includes positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, the method further includes positioning a top plug in the top throat passage.

A method of operating an apparatus for coupling an expandable tubular member to a preexisting structure such as, for example, a wellbore casing, a pipeline, or a structural support has also been described in which the apparatus includes a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage, an annular expansion cone coupled to the first annular support member, an expandable tubular member movably coupled to the expansion cone, a second annular support member defining a second fluid passage coupled to the expandable tubular member, an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having top and bottom throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member, and an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages. An annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve. The method includes positioning the apparatus within the preexisting structure, injecting fluidic materials into the

first, second and third fluid passages, positioning a bottom plug in the bottom throat passage, injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the annular region to radially expand a portion of the expandable tubular member, displacing the annular sleeve to fluidically couple the second and third radial passages, injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages, displacing the annular sleeve to fluidically decouple the second and third radial passages, and injecting a non-hardenable fluidic material through the first fluid passage and the first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member. In an exemplary embodiment, positioning the apparatus within the preexisting structure includes positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure. In an exemplary embodiment, positioning the apparatus within the preexisting structure includes positioning an end of the expandable tubular member adjacent to a preexisting section of a structural element casing within the preexisting structure. In an exemplary embodiment, injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member includes injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure. In an exemplary embodiment, the method further includes positioning a top plug in the top throat passage.

Although this detailed description has shown and described illustrative embodiments of the invention, this description contemplates a wide range of modifications, changes, and substitutions. In some instances, one may employ some features of the present invention without a corresponding use of the other features. Accordingly, it is appropriate that readers should construe the

- 51 -

appended claims broadly, and in a manner consistent with the scope of the invention.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group
5 of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or
10 information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

2001292695 12 Apr 2006

Claims

What is claimed is:

- 1 1. A method of forming a wellbore casing within a borehole within a
2 subterranean formation, comprising:
3 positioning an expandable tubular member within the borehole;
4 injecting fluidic materials into the expandable tubular member;
5 fluidically isolating a first region from a second region within the
6 expandable tubular member;
7 fluidically coupling the first and second regions;
8 injecting a hardenable fluidic sealing material into the expandable
9 tubular member;
10 fluidically decoupling the first and second regions; and
11 injecting a non-hardenable fluidic material into the expandable tubular
12 member to radially expand the tubular member.
- 1 2. The method of claim 1, wherein positioning the expandable tubular
2 member within the borehole comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the borehole.
- 1 3. The method of claim 1, further comprising:
2 fluidically isolating the second region from a third region within the
3 expandable tubular member.
- 1 4. An apparatus for forming a wellbore casing within a borehole within a
2 subterranean formation, comprising:
3 means for positioning an expandable tubular member within the
4 borehole;
5 means for injecting fluidic materials into the expandable tubular
6 member;
7 means for fluidically isolating a first region from a second region within
8 the expandable tubular member;

9 means for fluidically coupling the first and second regions;
10 means for injecting a hardenable fluidic sealing material into the
11 expandable tubular member;
12 means for fluidically decoupling the first and second regions; and
13 means for injecting a non-hardenable fluidic material into the
14 expandable tubular member to radially expand the tubular
15 member.

1 5. The apparatus of claim 4, wherein the means for positioning the
2 expandable tubular member within the borehole comprises:
3 means for positioning an end of the expandable tubular member adjacent
4 to the bottom of the borehole.

1 6. The apparatus of claim 4, further comprising:
2 means for fluidically isolating the second region from a third region within
3 the expandable tubular member.

1 7. A method of forming a wellbore casing within a borehole within a
2 subterranean formation, comprising:
3 positioning an expandable tubular member within the borehole;
4 injecting fluidic materials into the expandable tubular member;
5 fluidically isolating a first region from a second region within the
6 expandable tubular member;
7 injecting a non-hardenable fluidic material into the expandable tubular
8 member to radially expand at least a portion of the tubular
9 member;
10 fluidically coupling the first and second regions;
11 injecting a hardenable fluidic sealing material into the expandable
12 tubular member;
13 fluidically decoupling the first and second regions; and

14 injecting a non-hardenable fluidic material into the expandable tubular
15 member to radially expand another portion of the tubular
16 member.

1 8. The method of claim 7, wherein positioning the expandable tubular
2 member within the borehole comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the borehole.

1 9. The method of claim 7, wherein positioning the expandable tubular
2 member within the borehole comprises:
3 positioning an end of the expandable tubular member adjacent to a
4 preexisting section of wellbore casing within the borehole.

1 10. The method of claim 7, wherein injecting a non-hardenable fluidic
2 material into the expandable tubular member to radially expand at least a
3 portion of the tubular member comprises:
4 injecting a non-hardenable fluidic material into the expandable tubular
5 member to radially expand at least a portion of the tubular
6 member until an end portion of the tubular member is positioned
7 proximate the bottom of the borehole.

1 11. The method of claim 7, further comprising:
2 fluidically isolating the second region from a third region within the
3 expandable tubular member.

1 12. An apparatus for forming a wellbore casing within a borehole within a
2 subterranean formation, comprising:
3 means for positioning an expandable tubular member within the
4 borehole;
5 means for injecting fluidic materials into the expandable tubular
6 member;

7 means for fluidically isolating a first region from a second region within
8 the expandable tubular member;
9 means for injecting a non-hardenable fluidic material into the
10 expandable tubular member to radially expand at least a portion of
11 the tubular member;
12 means for fluidically coupling the first and second regions;
13 means for injecting a hardenable fluidic sealing material into the
14 expandable tubular member;
15 means for fluidically decoupling the first and second regions; and
16 means for injecting a non-hardenable fluidic material into the
17 expandable tubular member to radially expand another portion of
18 the tubular member.

1 13. The apparatus of claim 12, wherein means for positioning the expandable
2 tubular member within the borehole comprises:

3 means for positioning an end of the expandable tubular member adjacent
4 to the bottom of the borehole.

1 14. The apparatus of claim 12, wherein means for positioning the expandable
2 tubular member within the borehole comprises:

3 means for positioning an end of the expandable tubular member adjacent
4 to a preexisting section of wellbore casing within the borehole.

1 15. The apparatus of claim 12, wherein means for injecting a non-hardenable
2 fluidic material into the expandable tubular member to radially expand at least
3 a portion of the tubular member comprises:

4 means for injecting a non-hardenable fluidic material into the
5 expandable tubular member to radially expand at least a portion of
6 the tubular member until an end portion of the tubular member is
7 positioned proximate the bottom of the borehole.

1 16. The apparatus of claim 12, further comprising:

- 56 -

means for fluidicly isolating the second region from a third region within the expandable tubular member.

17. An apparatus for forming a wellbore casing within a borehole within a subterranean formation, comprising:

a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidicly coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;

an expandable tubular member movably coupled to the expansion cone;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

an annular valve member defining a third fluid passage fluidicly coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidicly coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidicly coupling the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

18. An apparatus for forming a wellbore casing within a borehole in a subterranean formation, comprising:

means for radially expanding and plastically deforming an expandable tubular member; and

means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the borehole, defining one or more passages and comprising:

- 57 -

means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages.

19. The apparatus of claim 18, wherein the means for controllably permitting fluidic
5 materials to bypass at least a portion of at least one of the one or more passages,
comprises:

2001292695 12 Apr 2006

4 a sliding sleeve valve.

- 1 20. A method of operating an apparatus for forming a wellbore casing within
2 a borehole within a subterranean formation, the apparatus comprising:
3 a first annular support member defining a first fluid passage and one or
4 more first radial passages having pressure sensitive valves fluidically
5 coupled to the first fluid passage;
6 an annular expansion cone coupled to the first annular support member;
7 an expandable tubular member movably coupled to the expansion cone;
8 a second annular support member defining a second fluid passage
9 coupled to the expandable tubular member;
10 an annular valve member defining a third fluid passage fluidically coupled
11 to the first and second fluid passages having top and bottom
12 throat passages, defining second and third radial passages fluidically
13 coupled to the third fluid passage, coupled to the second annular
14 support member, and movably coupled to the first annular support
15 member; and
16 an annular sleeve releasably coupled to the first annular support member
17 and movably coupled to the annular valve member for controllably
18 fluidically coupling the second and third radial passages; and
19 wherein an annular region is defined by the region between the tubular
20 member and the first annular support member, the second
21 annular support member, the annular valve member, and the
22 annular sleeve;
23 the method comprising:
24 positioning the apparatus within the borehole;
25 injecting fluidic materials into the first, second and third fluid
26 passages;
27 positioning a bottom plug in the bottom throat passage;
28 displacing the annular sleeve to fluidically couple the second and
29 third radial passages;

30 injecting a hardenable fluidic sealing material through the first,
31 second, and third fluid passages, and the second and third
32 radial passages;
33 displacing the annular sleeve to fluidically decouple the second and
34 third radial passages; and
35 injecting a non-hardenable fluidic material through the first fluid
36 passage and the first radial passages and pressure sensitive
37 valves into the annular region to radially expand the
38 expandable tubular member.

1 21. The method of claim 20, wherein positioning the apparatus within the
2 borehole comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the borehole.

1 22. The method of claim 20, further comprising:
2 positioning a top plug in the top throat passage.

1 23. A method of operating an apparatus for forming a wellbore casing within
2 a borehole within a subterranean formation, the apparatus comprising:
3 a first annular support member defining a first fluid passage and one or
4 more first radial passages having pressure sensitive valves fluidically
5 coupled to the first fluid passage;
6 an annular expansion cone coupled to the first annular support member;
7 an expandable tubular member movably coupled to the expansion cone;
8 a second annular support member defining a second fluid passage
9 coupled to the expandable tubular member;
10 an annular valve member defining a third fluid passage fluidically coupled
11 to the first and second fluid passages having top and bottom
12 throat passages, defining second and third radial passages fluidically
13 coupled to the third fluid passage, coupled to the second annular

14 support member, and movably coupled to the first annular support
15 member; and
16 an annular sleeve releasably coupled to the first annular support member
17 and movably coupled to the annular valve member for controllably
18 fluidicly coupling the second and third radial passages; and
19 wherein an annular region is defined by the region between the tubular
20 member and the first annular support member, the second
21 annular support member, the annular valve member, and the
22 annular sleeve;
23 the method comprising:
24 positioning the apparatus within the borehole;
25 injecting fluidic materials into the first, second and third fluid
26 passages;
27 positioning a bottom plug in the bottom throat passage;
28 injecting a non-hardenable fluidic material through the first fluid
29 passages and the first radial passages and pressure sensitive
30 valves into the annular region to radially expand a portion
31 of the expandable tubular member;
32 displacing the annular sleeve to fluidicly couple the second and
33 third radial passages;
34 injecting a hardenable fluidic sealing material through the first,
35 second, and third fluid passages, and the second and third
36 radial passages;
37 displacing the annular sleeve to fluidicly decouple the second and
38 third radial passages; and
39 injecting a non-hardenable fluidic material through the first fluid
40 passage and the first radial passages and pressure sensitive
41 valves into the annular region to radially expand another
42 portion of the expandable tubular member.

1 24. The method of claim 23, wherein positioning the apparatus within the
2 borehole comprises:

3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the borehole.

1 25. The method of claim 23, wherein positioning the apparatus within the
2 borehole comprises:
3 positioning an end of the expandable tubular member adjacent to a
4 preexisting section of wellbore casing within the borehole.

1 26. The method of claim 23, wherein injecting a non-hardenable fluidic
2 material into the first fluid passage and first radial passages and pressure
3 sensitive valves to radially expand a portion of the expandable tubular member
4 comprises:
5 injecting a non-hardenable fluidic material into the first fluid passage
6 and first radial passages and pressure sensitive valves to radially
7 expand the expandable tubular member until an end portion of
8 the tubular member is positioned proximate the bottom of the
9 borehole.

1 27. The method of claim 23, further comprising:
2 positioning a top plug in the top throat passage.

1 28. A method of coupling an expandable tubular member to a preexisting
2 structure, comprising:
3 positioning the expandable tubular member within the preexisting
4 structure;
5 injecting fluidic materials into the expandable tubular member;
6 fluidically isolating a first region from a second region within the
7 expandable tubular member;
8 fluidically coupling the first and second regions;
9 injecting a hardenable fluidic sealing material into the expandable
10 tubular member;
11 fluidically decoupling the first and second regions; and

12 injecting a non-hardenable fluidic material into the expandable tubular
13 member to radially expand the tubular member.

1 29. The method of claim 28, wherein positioning the expandable tubular
2 member within the preexisting structure comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the preexisting structure.

1 30. The method of claim 28, further comprising:
2 fluidically isolating the second region from a third region within the
3 expandable tubular member.

1 31. An apparatus for coupling an expandable tubular member to a
2 preexisting structure, comprising:
3 means for positioning the expandable tubular member within the
4 preexisting structure;
5 means for injecting fluidic materials into the expandable tubular
6 member;
7 means for fluidically isolating a first region from a second region within
8 the expandable tubular member;
9 means for fluidically coupling the first and second regions;
10 means for injecting a hardenable fluidic sealing material into the
11 expandable tubular member;
12 means for fluidically decoupling the first and second regions; and
13 means for injecting a non-hardenable fluidic material into the
14 expandable tubular member to radially expand the tubular
15 member.

1 32. The apparatus of claim 31, wherein the means for positioning the
2 expandable tubular member within the preexisting structure comprises:
3 means for positioning an end of the expandable tubular member adjacent
4 to the bottom of the preexisting structure.

1 33. The apparatus of claim 31, further comprising:
2 means for fluidically isolating the second region from a third region within
3 the expandable tubular member.

1 34. A method of coupling an expandable tubular member to a preexisting
2 structure, comprising:
3 positioning the expandable tubular member within the preexisting
4 structure;
5 injecting fluidic materials into the expandable tubular member;
6 fluidically isolating a first region from a second region within the
7 expandable tubular member;
8 injecting a non-hardenable fluidic material into the expandable tubular
9 member to radially expand at least a portion of the tubular
10 member;
11 fluidically coupling the first and second regions;
12 injecting a hardenable fluidic sealing material into the expandable
13 tubular member;
14 fluidically decoupling the first and second regions; and
15 injecting a non-hardenable fluidic material into the expandable tubular
16 member to radially expand another portion of the tubular
17 member.

1 35. The method of claim 34, wherein positioning the expandable tubular
2 member within the preexisting structure comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the preexisting structure.

1 36. The method of claim 34, wherein positioning the expandable tubular
2 member within the preexisting structure comprises:

3 positioning an end of the expandable tubular member adjacent to a
4 preexisting tubular structural element within the preexisting
5 structure.

1 37. The method of claim 34, wherein injecting a non-hardenable fluidic
2 material into the expandable tubular member to radially expand at least a
3 portion of the tubular member comprises:
4 injecting a non-hardenable fluidic material into the expandable tubular
5 member to radially expand at least a portion of the tubular
6 member until an end portion of the tubular member is positioned
7 proximate the bottom of the preexisting structure.

1 38. The method of claim 34, further comprising:
2 fluidically isolating the second region from a third region within the
3 expandable tubular member.

1 39. An apparatus for coupling an expandable tubular member to a
2 preexisting structure, comprising:
3 means for positioning the expandable tubular member within the
4 preexisting structure;
5 means for injecting fluidic materials into the expandable tubular
6 member;
7 means for fluidically isolating a first region from a second region within
8 the expandable tubular member;
9 means for injecting a non-hardenable fluidic material into the
10 expandable tubular member to radially expand at least a portion of
11 the tubular member;
12 means for fluidically coupling the first and second regions;
13 means for injecting a hardenable fluidic sealing material into the
14 expandable tubular member;
15 means for fluidically decoupling the first and second regions; and

2001292695 12 Apr 2006

- 65 -

means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand another portion of the tubular member.

40. The apparatus of claim 39, wherein means for positioning the expandable tubular member within the preexisting structure comprises:

means for positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure.

41. The apparatus of claim 39, wherein means for positioning the expandable tubular member within the preexisting structure comprises:

means for positioning an end of the expandable tubular member adjacent to a preexisting structural element within the preexisting structure.

42. The apparatus of claim 39, wherein means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member comprises:

means for injecting a non-hardenable fluidic material into the expandable tubular member to radially expand at least a portion of the tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure.

43. The apparatus of claim 39, further comprising:

means for fluidically isolating the second region from a third region within the expandable tubular member.

44. An apparatus for coupling an expandable tubular member to a preexisting structure, comprising:

a first annular support member defining a first fluid passage and one or more first radial passages having pressure sensitive valves fluidically coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;

- 66 -

an expandable tubular member movably coupled to the expansion cone;
a second annular support member defining a second fluid passage coupled to the expandable tubular member;
an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and
an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and
wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

45. An apparatus for coupling an expandable tubular member to a preexisting structure, comprising:

means for radially expanding and plastically deforming the expandable tubular member within the preexisting structure; and

means for injecting a hardenable fluidic sealing material into an annulus between the expandable tubular member and the preexisting structure, defining one or more passages and comprising:

means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages.

46. The apparatus of claim 45, wherein the means for controllably permitting fluidic materials to bypass at least a portion of at least one of the one or more passages, comprises:

4 a sliding sleeve valve.

- 1 47. A method of operating an apparatus for coupling an expandable tubular
2 member to a preexisting structure, the apparatus comprising:
3 a first annular support member defining a first fluid passage and one or
4 more first radial passages having pressure sensitive valves fluidically
5 coupled to the first fluid passage;
6 an annular expansion cone coupled to the first annular support member;
7 an expandable tubular member movably coupled to the expansion cone;
8 a second annular support member defining a second fluid passage
9 coupled to the expandable tubular member;
10 an annular valve member defining a third fluid passage fluidically coupled
11 to the first and second fluid passages having top and bottom
12 throat passages, defining second and third radial passages fluidically
13 coupled to the third fluid passage, coupled to the second annular
14 support member, and movably coupled to the first annular support
15 member; and
16 an annular sleeve releasably coupled to the first annular support member
17 and movably coupled to the annular valve member for controllably
18 fluidically coupling the second and third radial passages; and
19 wherein an annular region is defined by the region between the tubular
20 member and the first annular support member, the second
21 annular support member, the annular valve member, and the
22 annular sleeve;
23 the method comprising:
24 positioning the apparatus within the preexisting structure;
25 injecting fluidic materials into the first, second and third fluid
26 passages;
27 positioning a bottom plug in the bottom throat passage;
28 displacing the annular sleeve to fluidically couple the second and
29 third radial passages;

30 injecting a hardenable fluidic sealing material through the first,
31 second, and third fluid passages, and the second and third
32 radial passages;
33 displacing the annular sleeve to fluidically decouple the second and
34 third radial passages; and
35 injecting a non-hardenable fluidic material through the first fluid
36 passage and the first radial passages and pressure sensitive
37 valves into the annular region to radially expand the
38 expandable tubular member.

1 48. The method of claim 47, wherein positioning the apparatus within the
2 preexisting structure comprises:
3 positioning an end of the expandable tubular member adjacent to the
4 bottom of the preexisting structure.

1 49. The method of claim 47, further comprising:
2 positioning a top plug in the top throat passage.

1 50. A method of operating an apparatus for coupling an expandable tubular
2 member to a preexisting structure, the apparatus comprising:
3 a first annular support member defining a first fluid passage and one or
4 more first radial passages having pressure sensitive valves fluidically
5 coupled to the first fluid passage;
6 an annular expansion cone coupled to the first annular support member;
7 an expandable tubular member movably coupled to the expansion cone;
8 a second annular support member defining a second fluid passage
9 coupled to the expandable tubular member;
10 an annular valve member defining a third fluid passage fluidically coupled
11 to the first and second fluid passages having top and bottom
12 throat passages, defining second and third radial passages fluidically
13 coupled to the third fluid passage, coupled to the second annular

14 support member, and movably coupled to the first annular support
15 member; and
16 an annular sleeve releasably coupled to the first annular support member
17 and movably coupled to the annular valve member for controllably
18 fluidicly coupling the second and third radial passages; and
19 wherein an annular region is defined by the region between the tubular
20 member and the first annular support member, the second
21 annular support member, the annular valve member, and the
22 annular sleeve;
23 the method comprising:
24 positioning the apparatus within the preexisting structure;
25 injecting fluidic materials into the first, second and third fluid
26 passages;
27 positioning a bottom plug in the bottom throat passage;
28 injecting a non-hardenable fluidic material through the first fluid
29 passages and the first radial passages and pressure sensitive
30 valves into the annular region to radially expand a portion
31 of the expandable tubular member;
32 displacing the annular sleeve to fluidicly couple the second and
33 third radial passages;
34 injecting a hardenable fluidic sealing material through the first,
35 second, and third fluid passages, and the second and third
36 radial passages;
37 displacing the annular sleeve to fluidicly decouple the second and
38 third radial passages; and
39 injecting a non-hardenable fluidic material through the first fluid
40 passage and the first radial passages and pressure sensitive
41 valves into the annular region to radially expand another
42 portion of the expandable tubular member.

1 51. The method of claim 50, wherein positioning the apparatus within the
2 preexisting structure comprises:

- 70 -

positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure.

52. The method of claim 50, wherein positioning the apparatus within the preexisting structure comprises:

positioning an end of the expandable tubular member adjacent to a preexisting section of a structural element within the preexisting structure.

53. The method of claim 50, wherein injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member comprises:

injecting a non-hardenable fluidic material into the first fluid passage and first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure.

54. The method of claim 50, further comprising:
positioning a top plug in the top throat passage.

55. A method of forming a wellbore casing within a borehole within a subterranean formation, substantially as herein described with reference to the accompanying drawings.

56. An apparatus for forming a wellbore casing within a borehole within a subterranean formation, substantially as herein described with reference to the accompanying drawings.

57. A method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation, substantially as herein described with reference to the accompanying drawings.

58. A method of coupling an expandable tubular member to a preexisting structure, substantially as herein described with reference to the accompanying drawings.

- 71 -

59. An apparatus for coupling an expandable tubular member to a preexisting structure, substantially as herein described with reference to the accompanying drawings.

- 5 60. A method of operating an apparatus for coupling an expandable tubular member to a preexisting structure, substantially as herein described with reference to the accompanying drawings.


Dated this 12th day of April, 2006

10 **Shell Oil Company**

by their Patent Attorneys


DAVIES COLLISON CAVE

2001292695 12 Apr 2006



10 ↗

Fig. 1

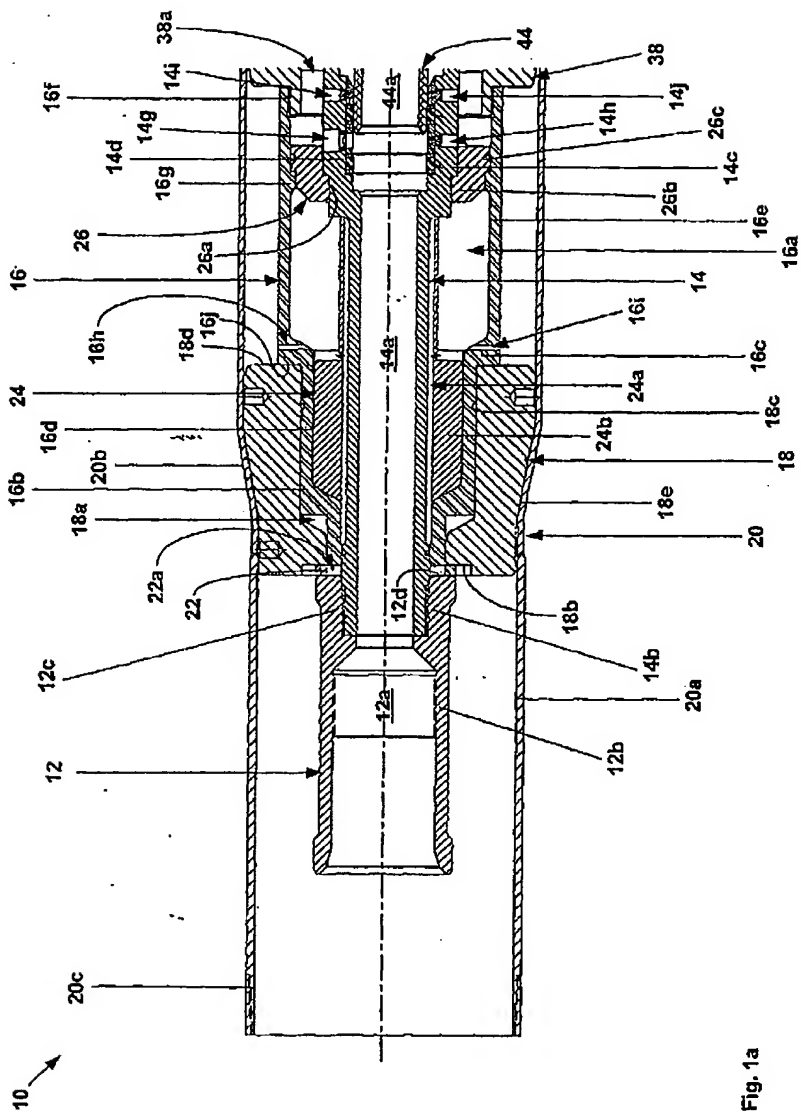

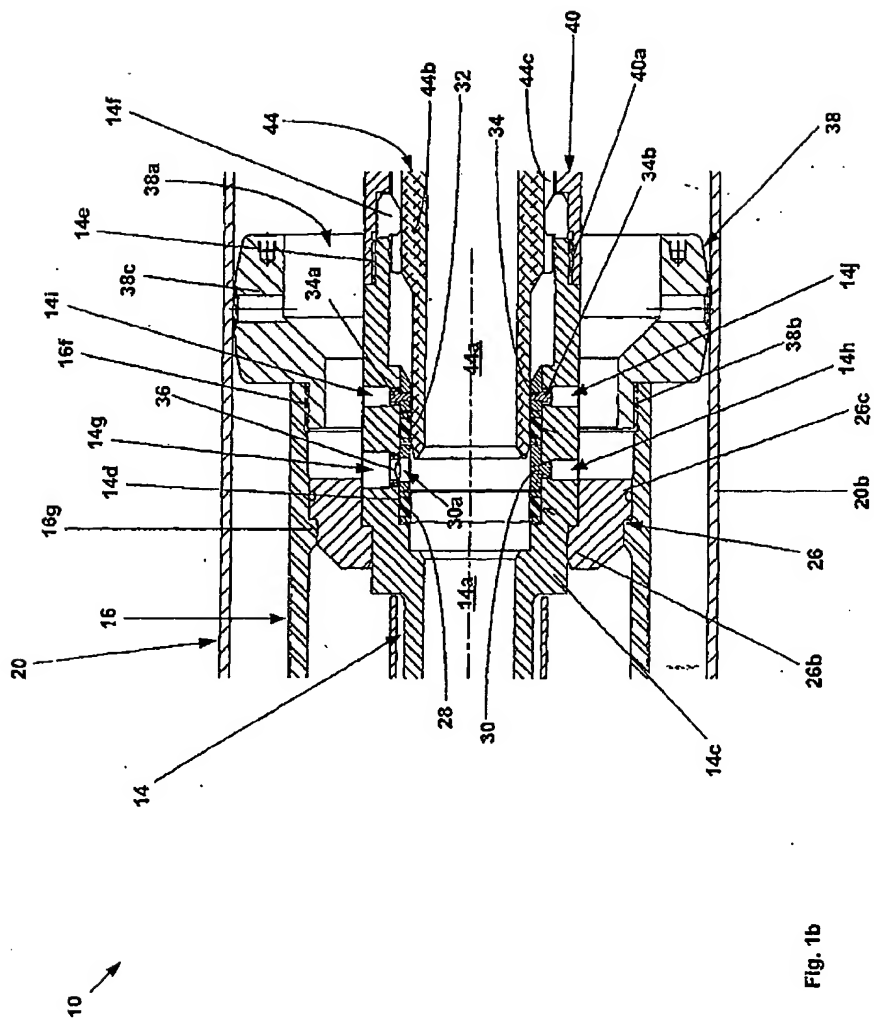


Fig. 1b

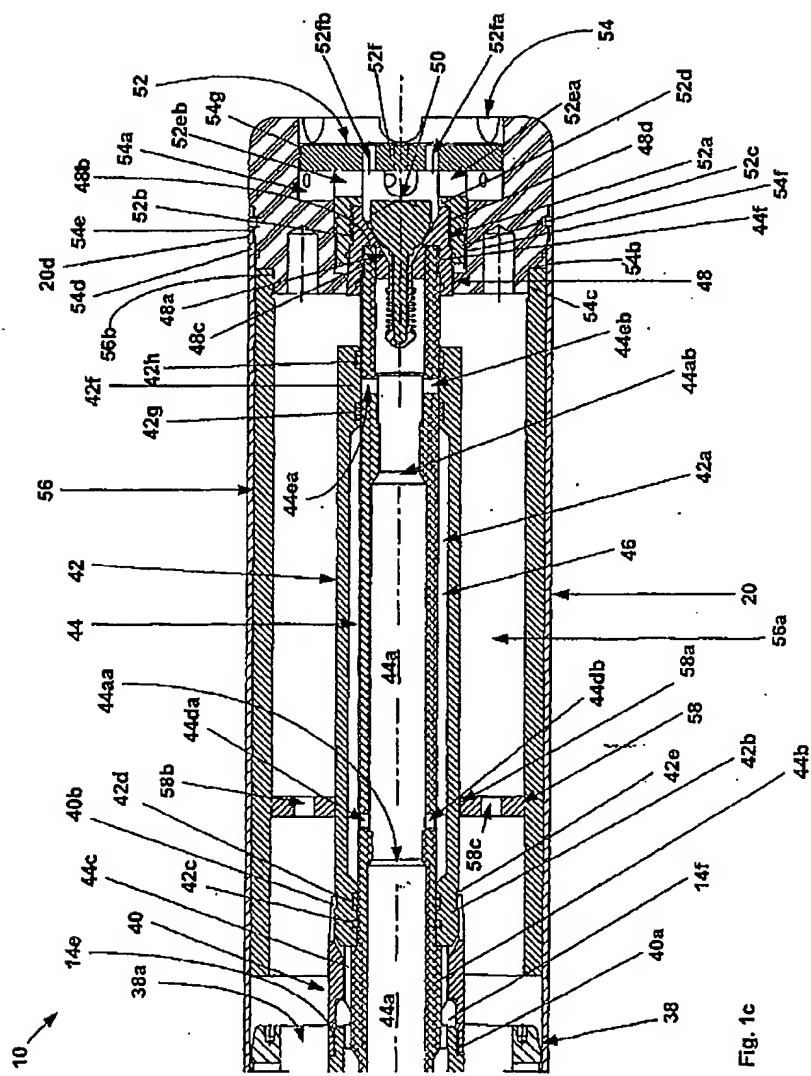


Fig. 1c

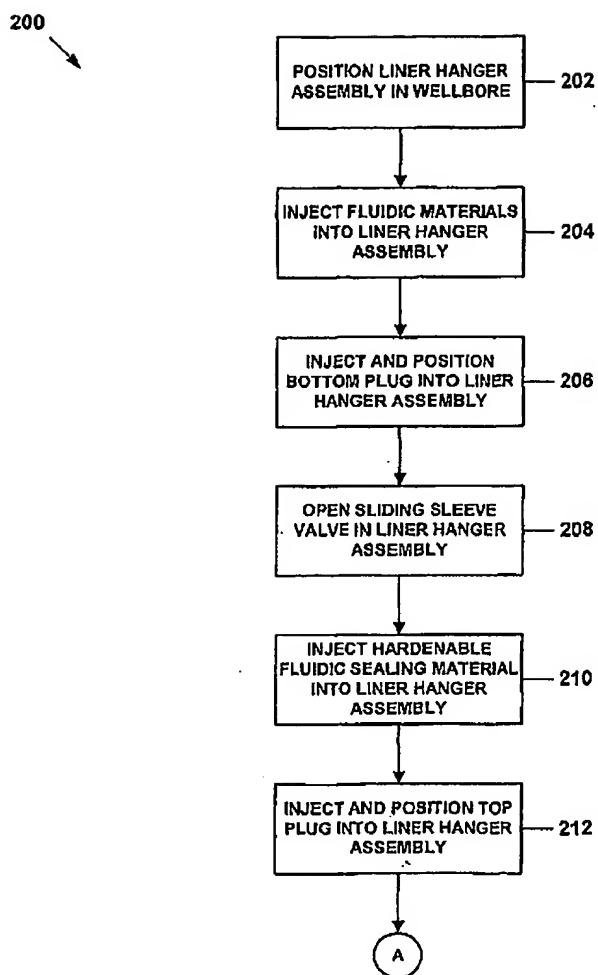


Fig. 2a

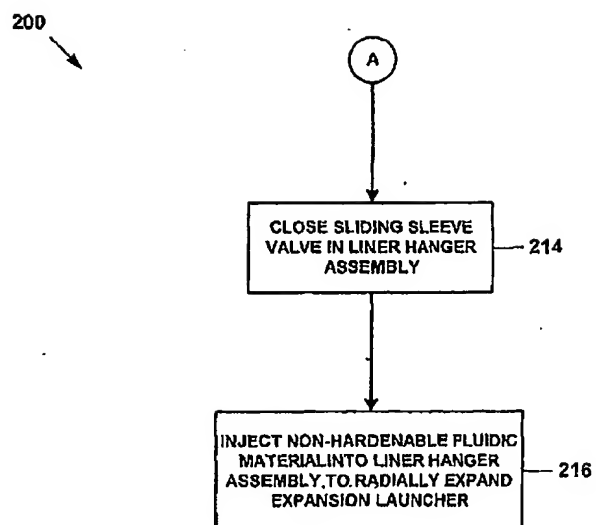


Fig. 2b

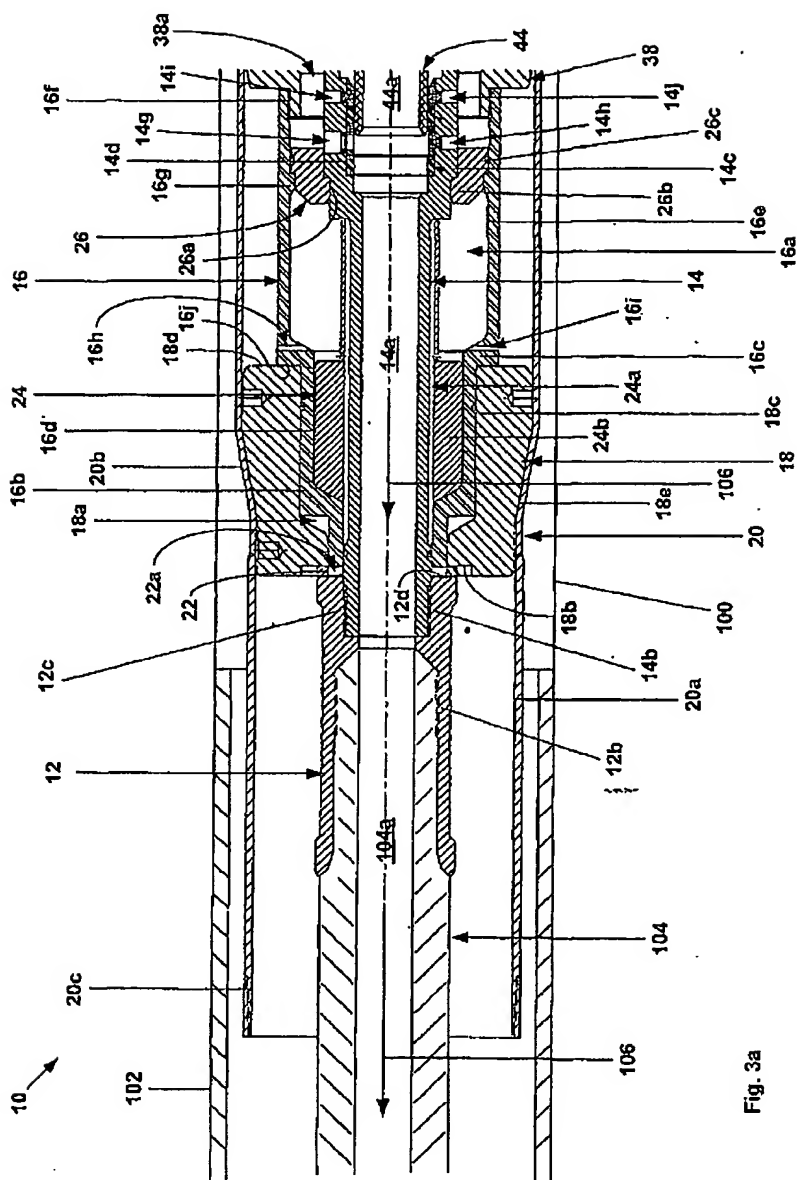


Fig. 3a

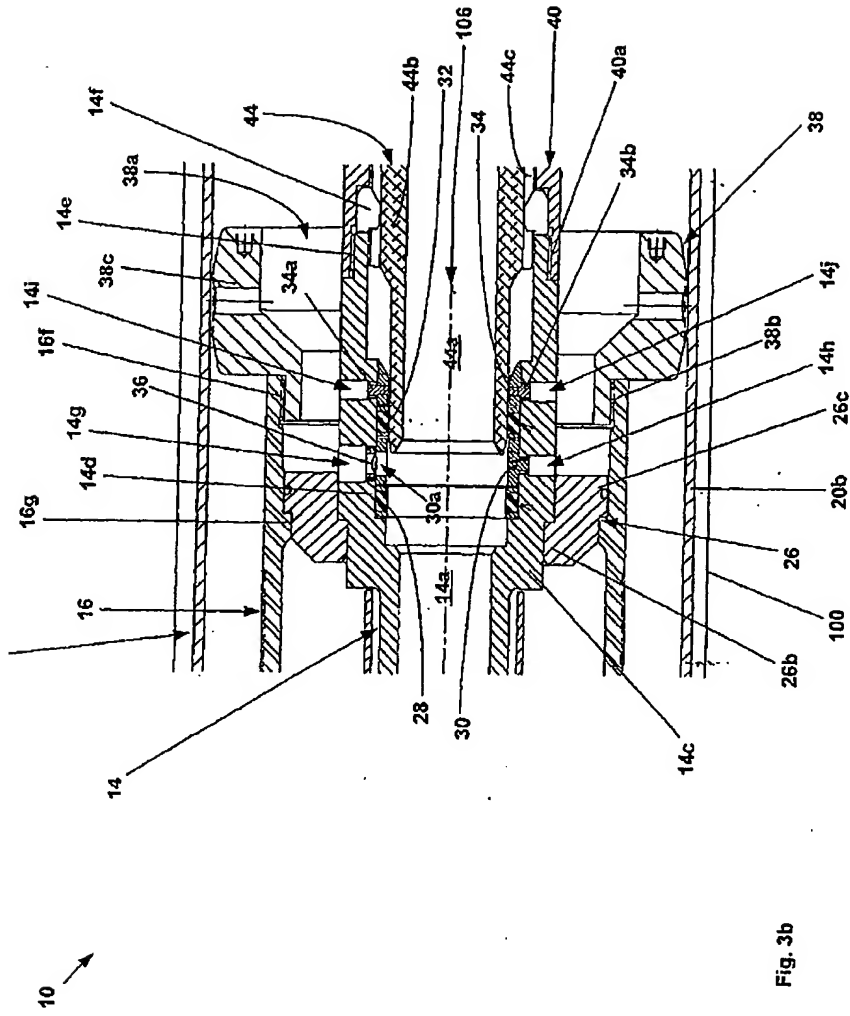


Fig. 3b

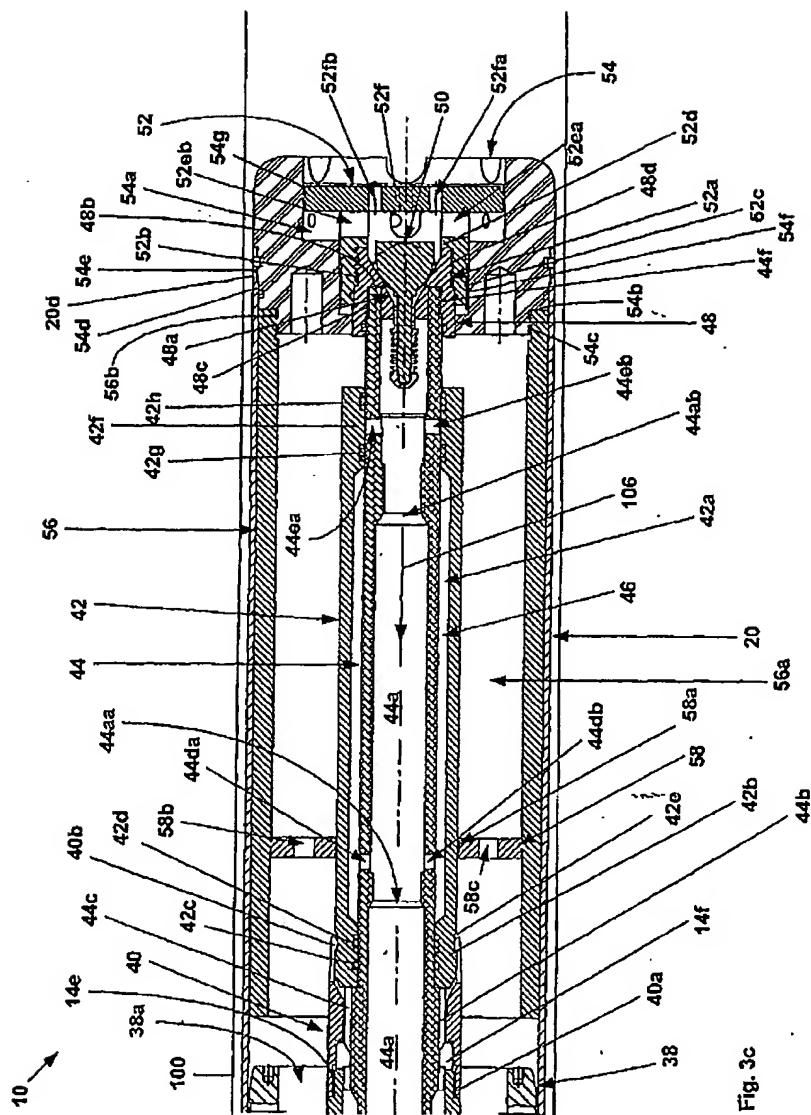


Fig. 3c

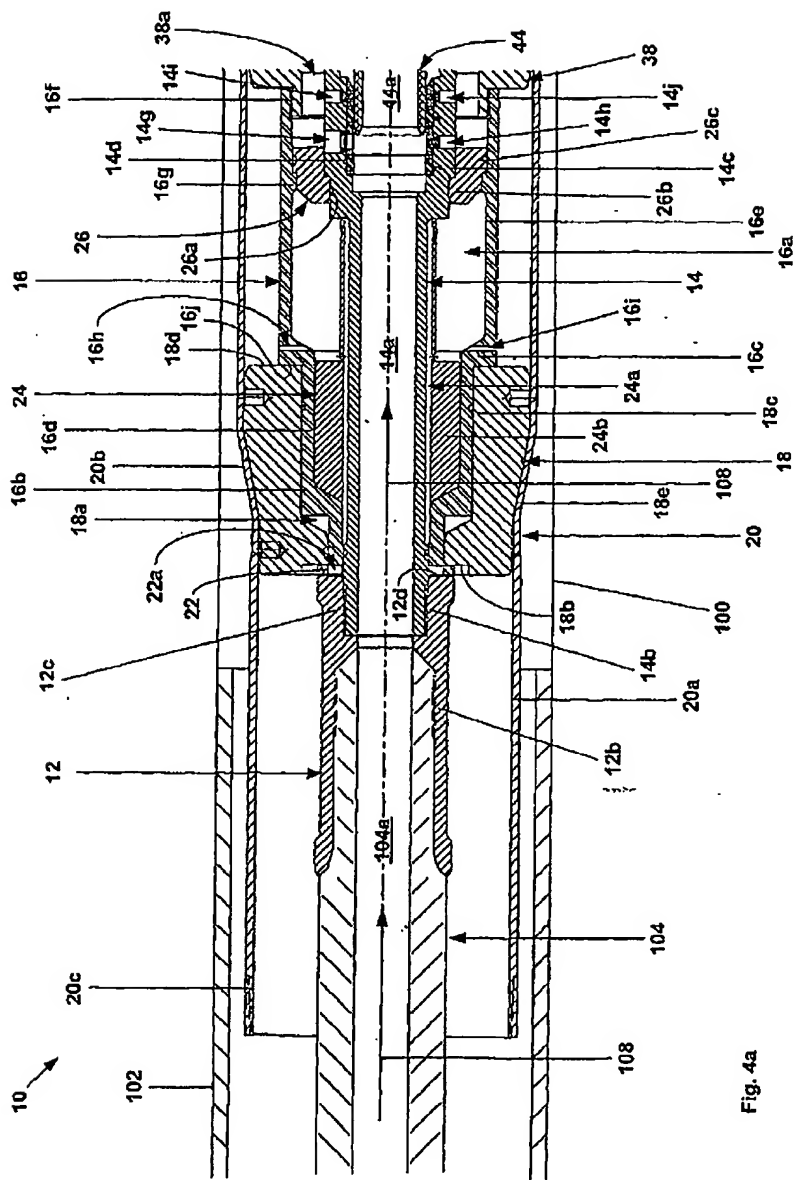


Fig. 4a

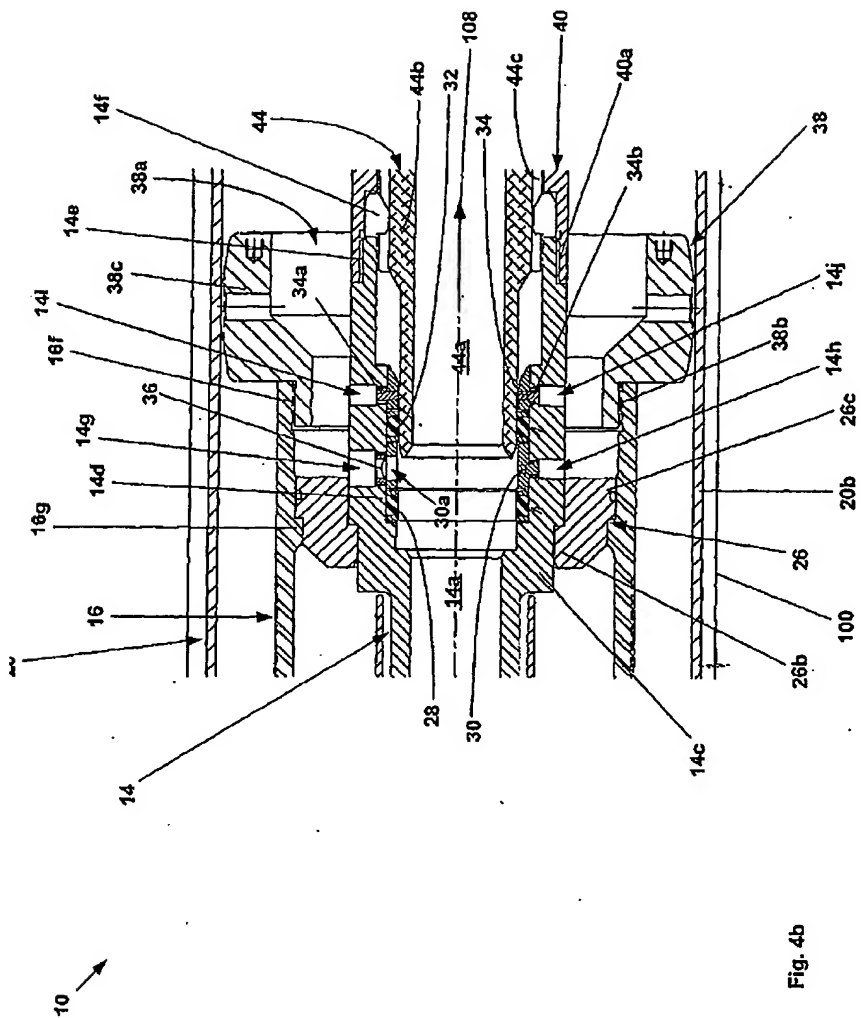


Fig. 4b

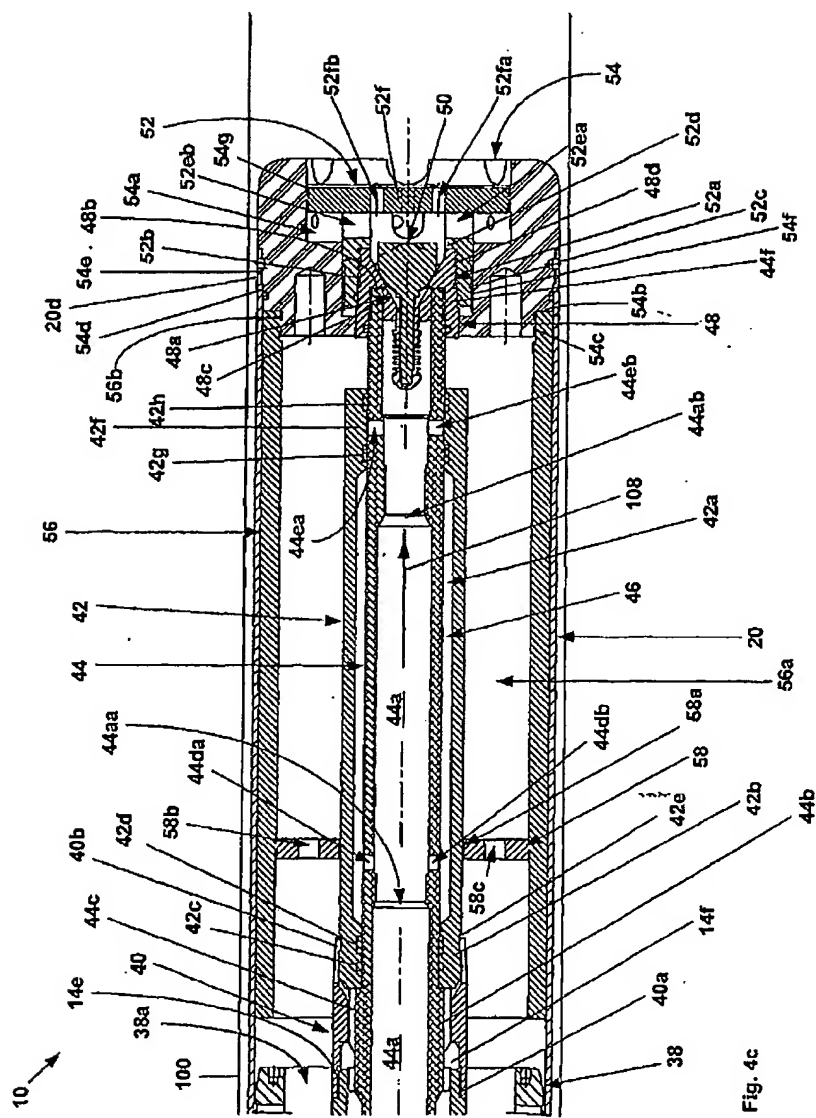


Fig. 4c

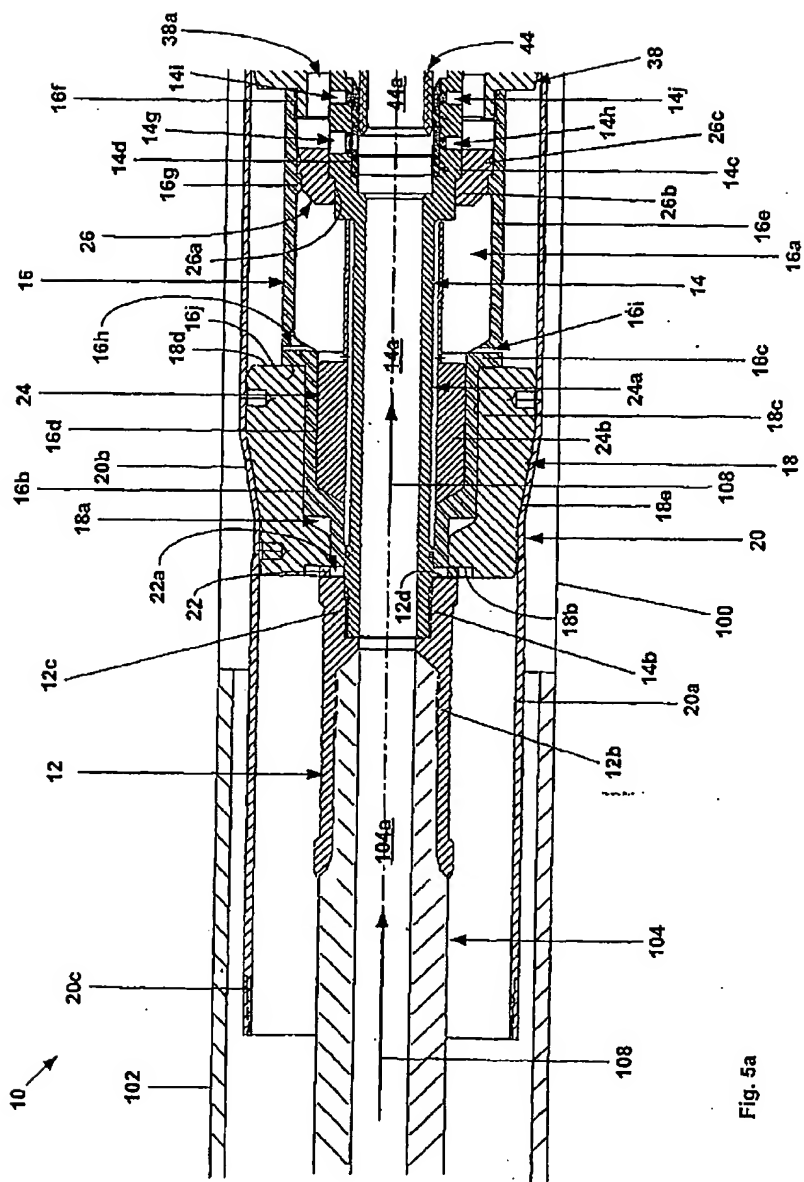


Fig. 5a

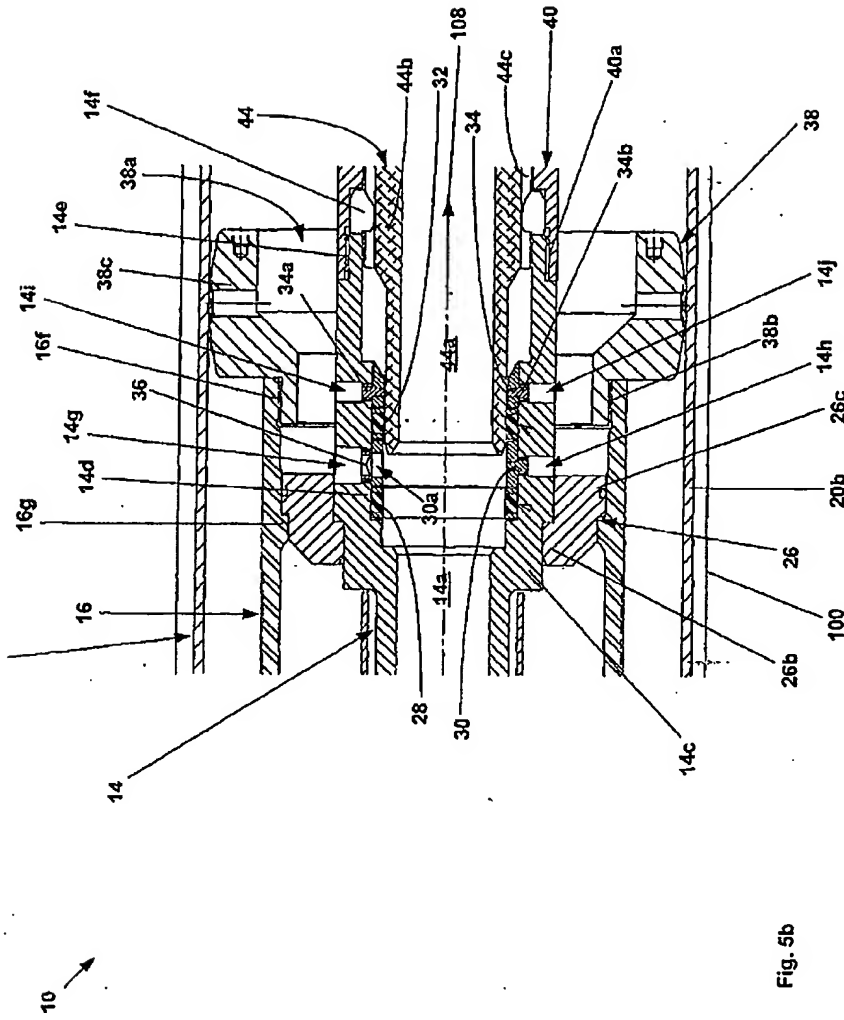


Fig. 5b



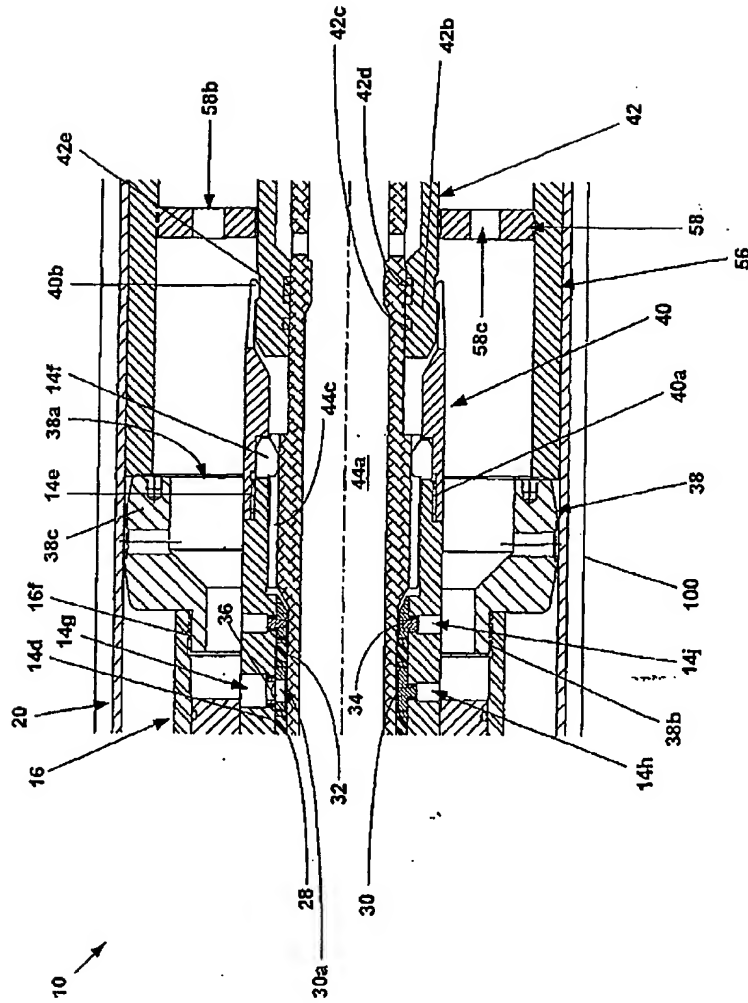
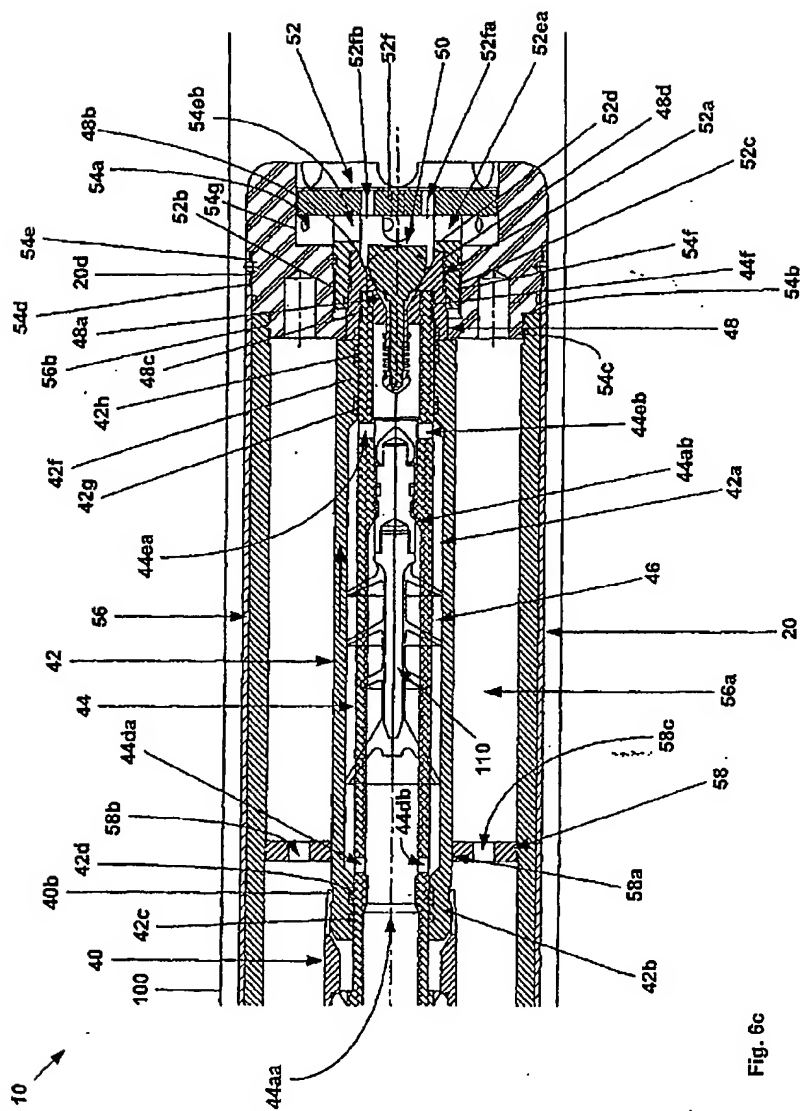


Fig. 6b



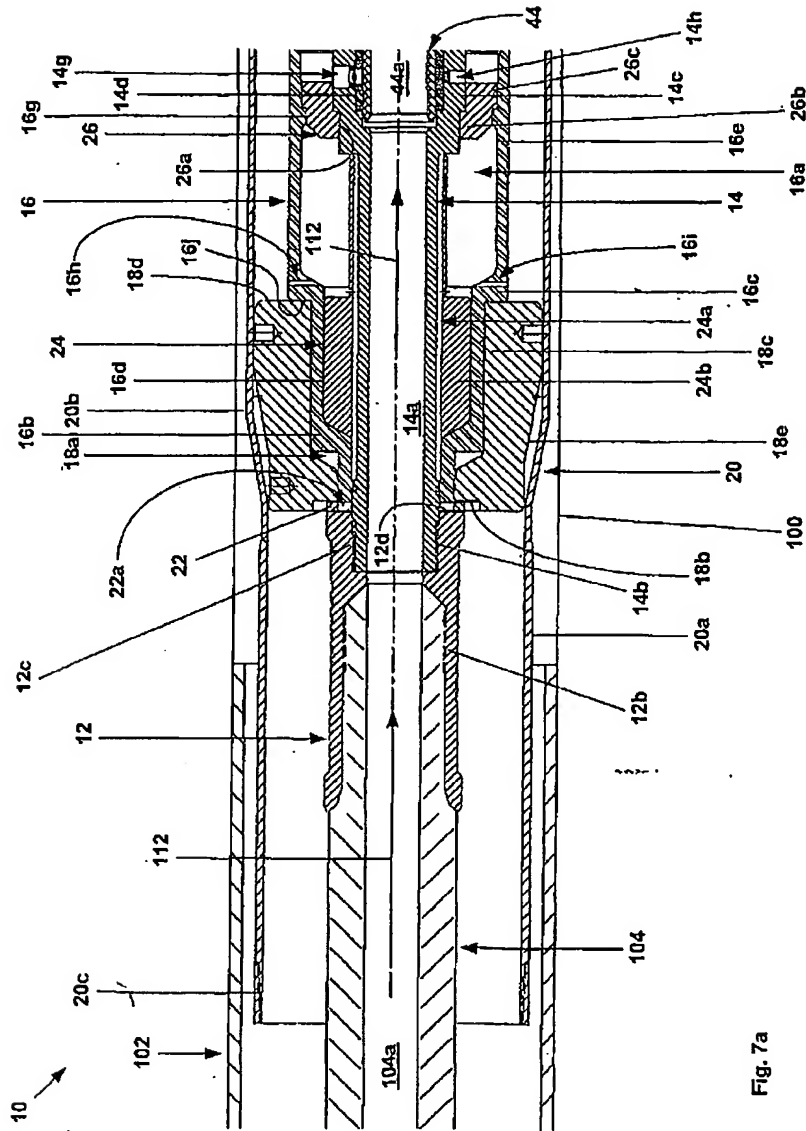


Fig. 7a

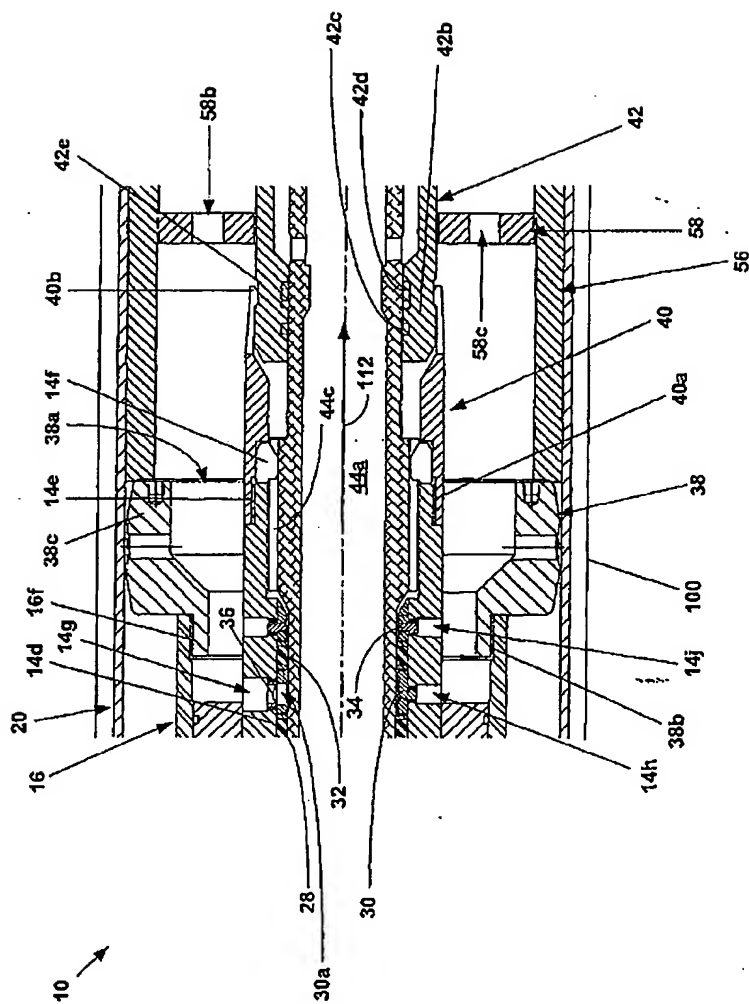


Fig. 7b

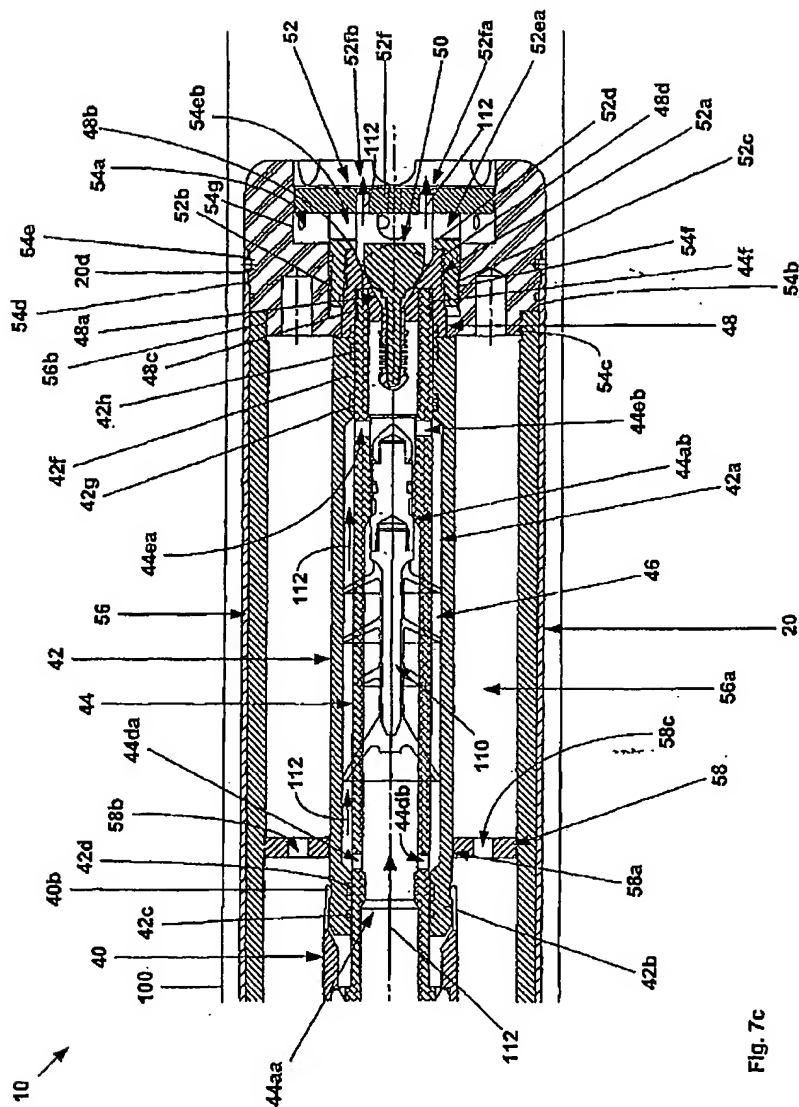


Fig. 7c

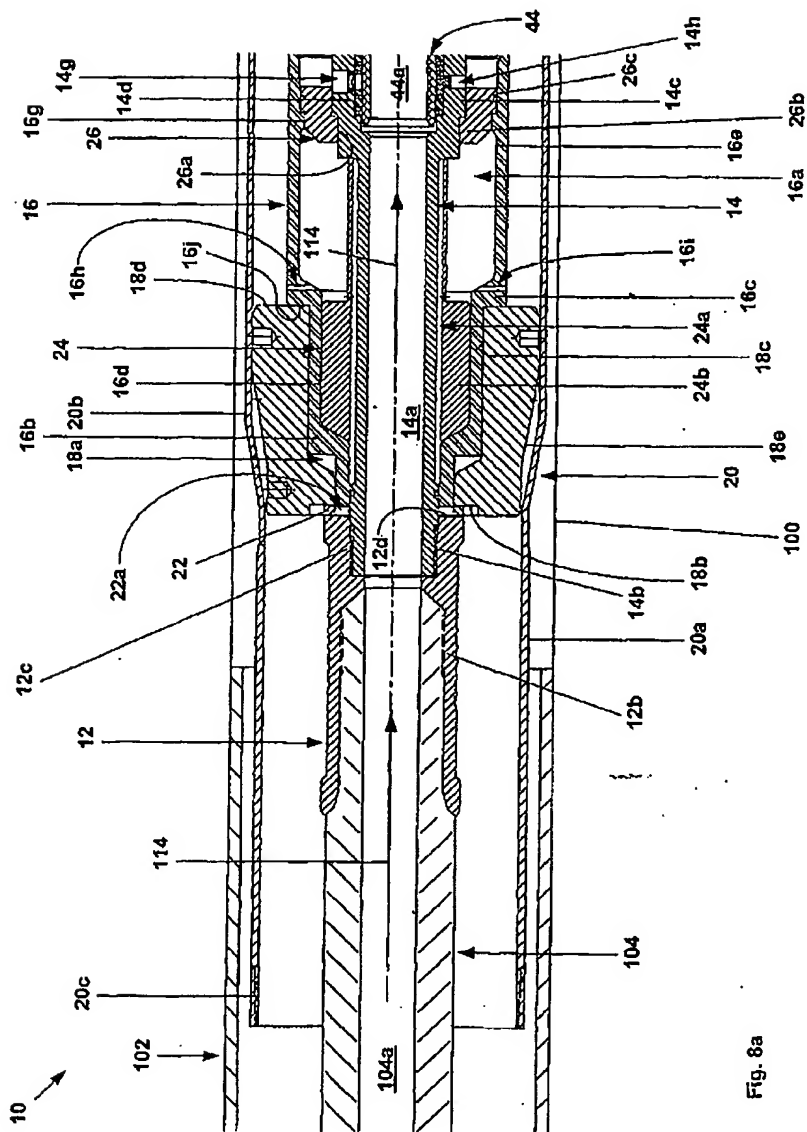


Fig. 8a

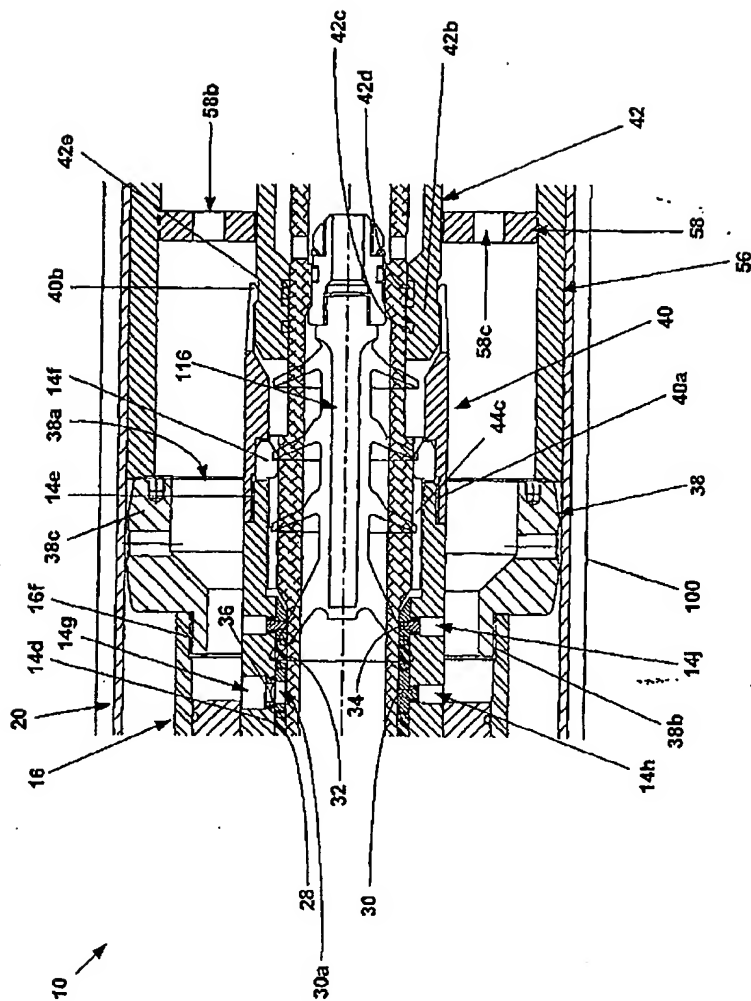
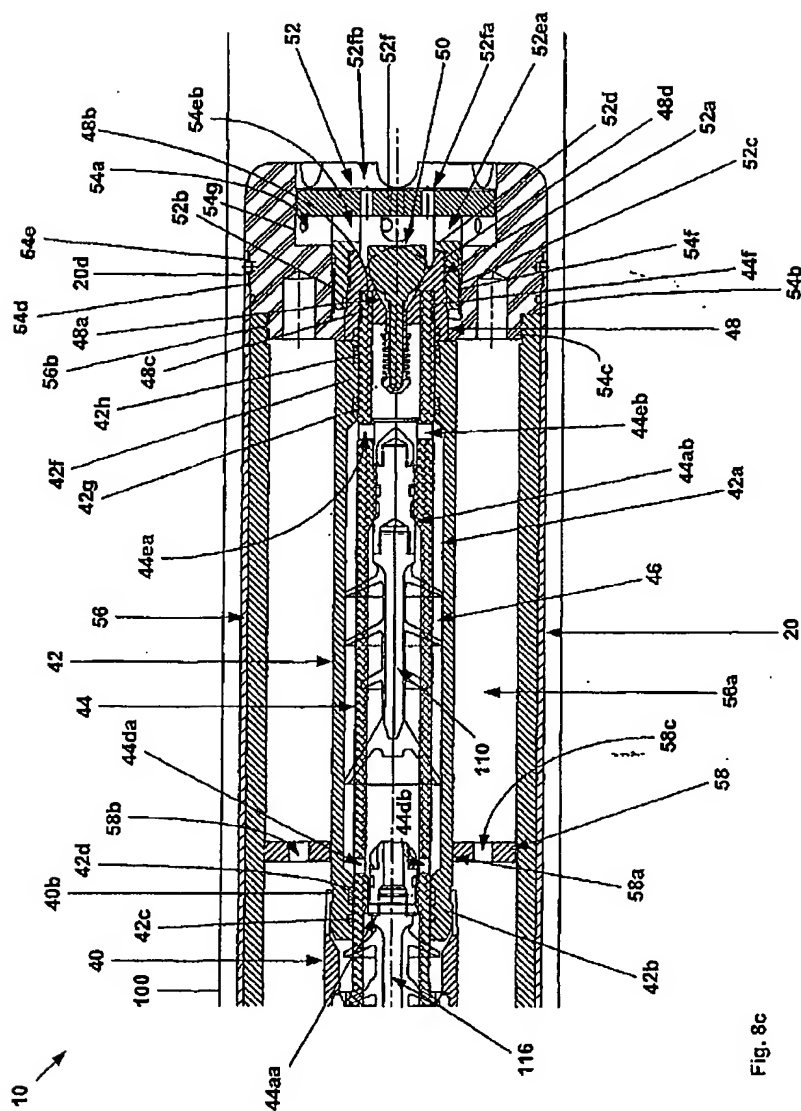
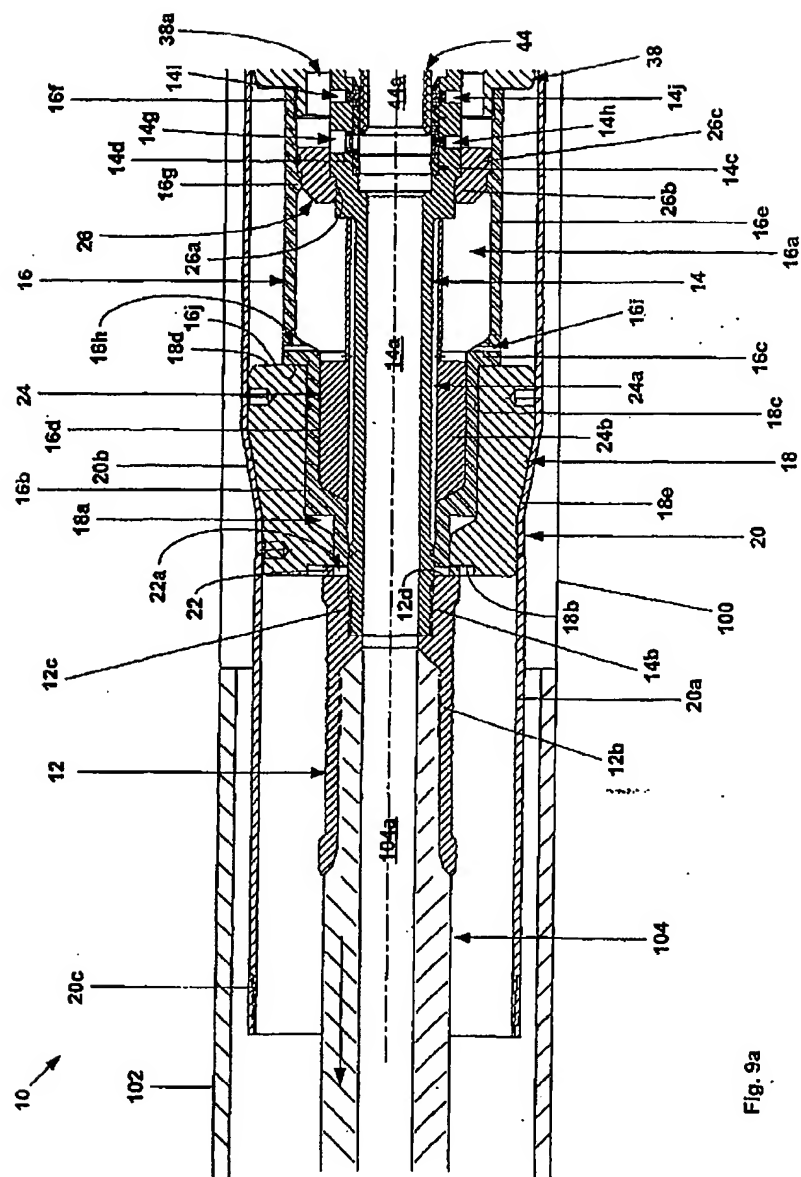


Fig. 8b





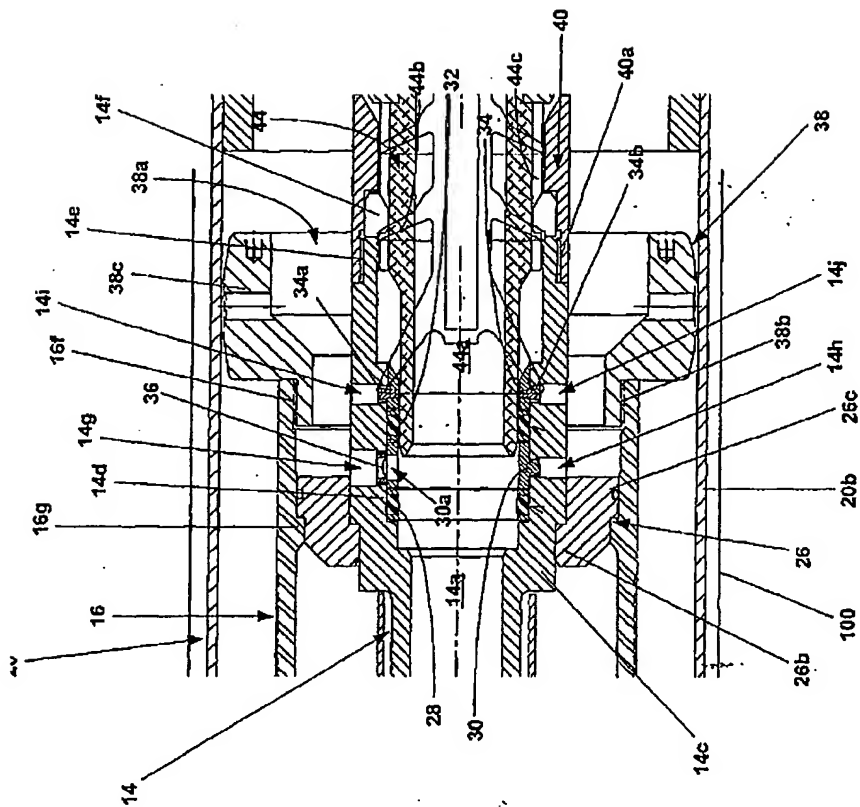
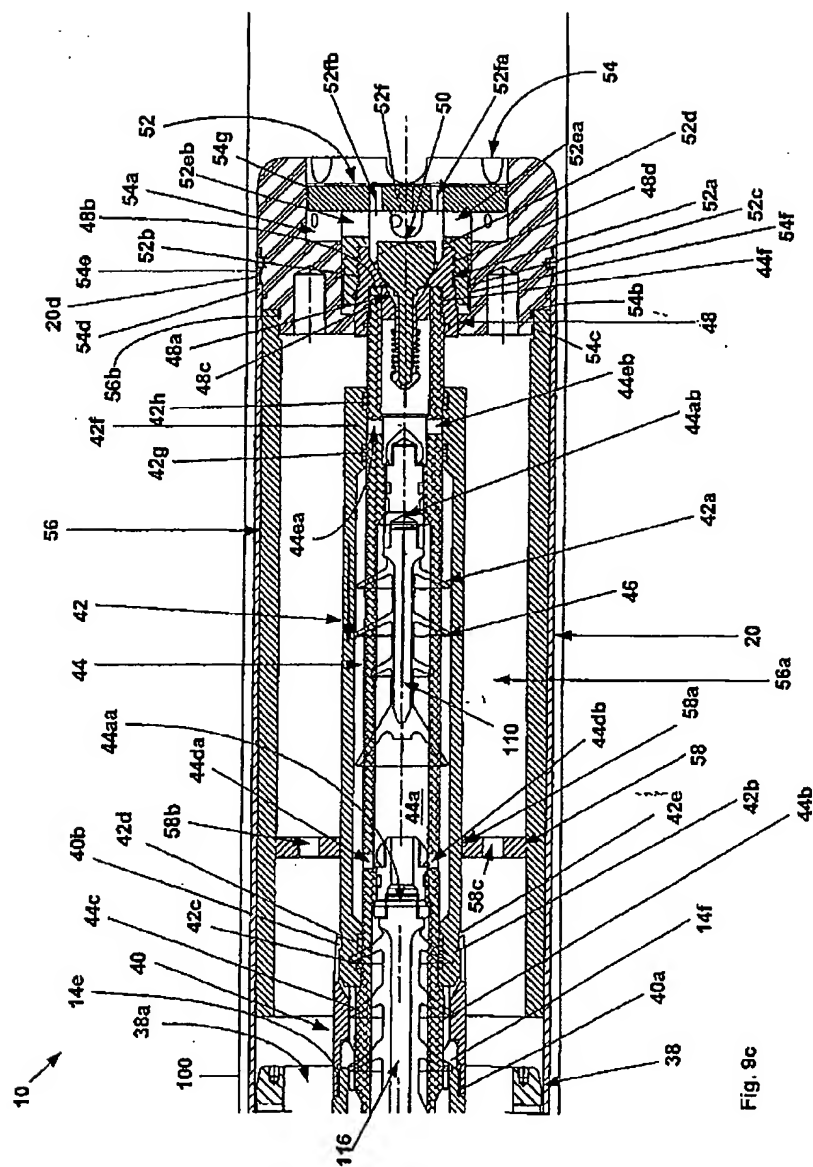
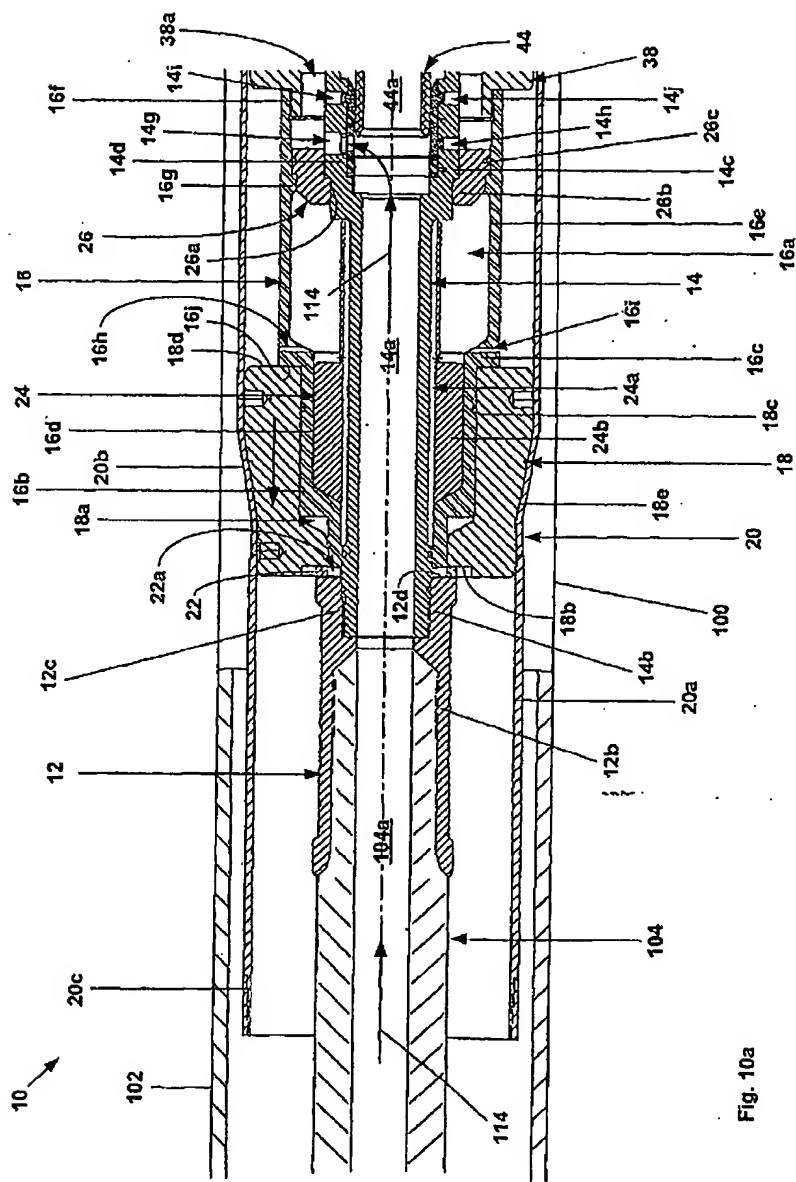


Fig. 9b






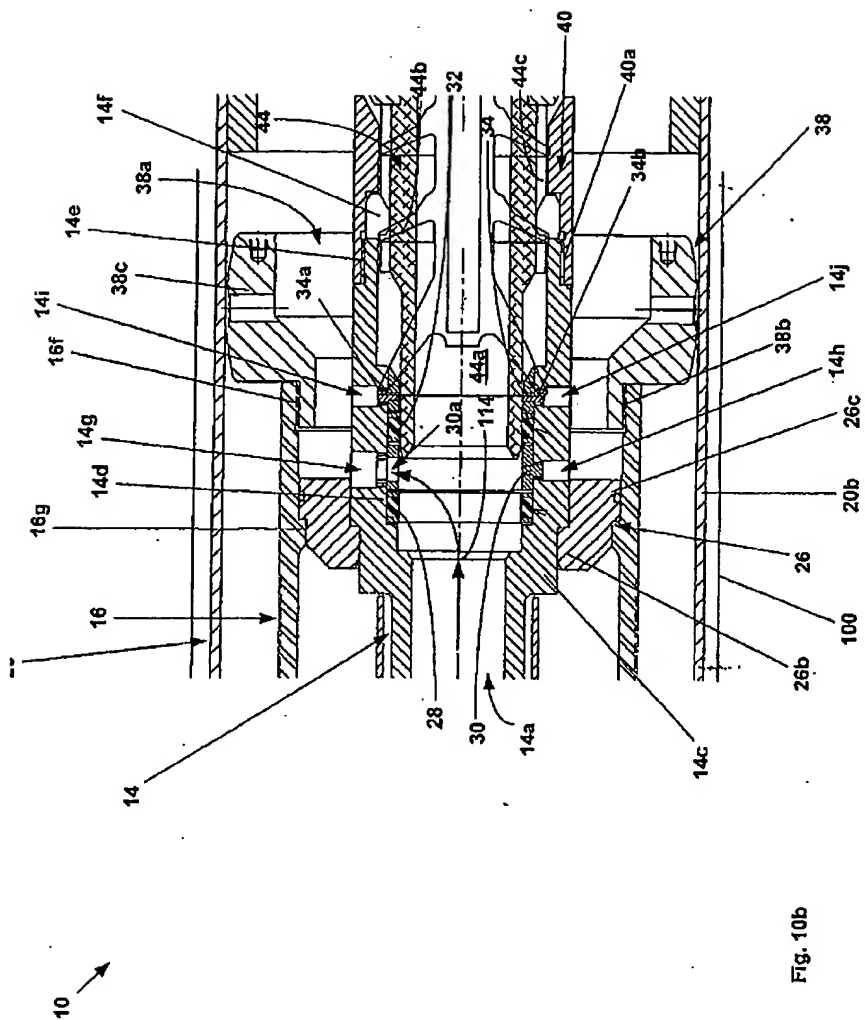


Fig. 10b

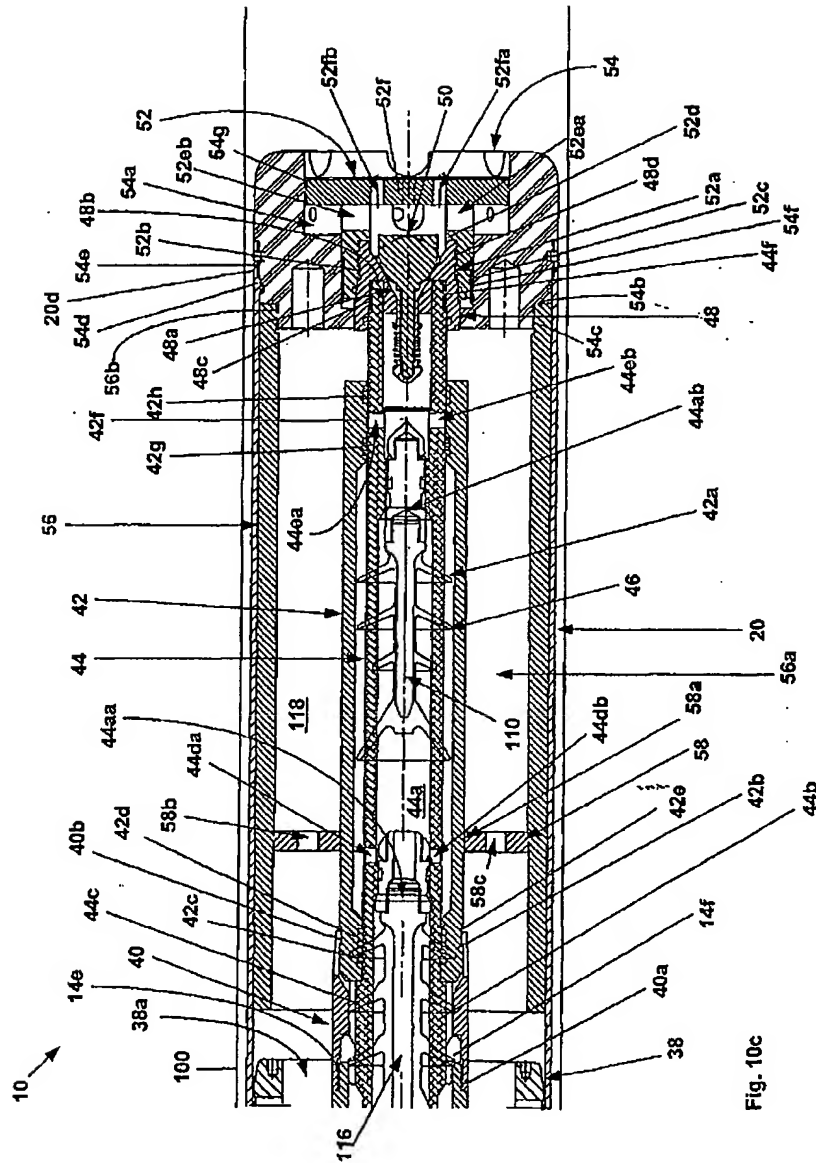

250

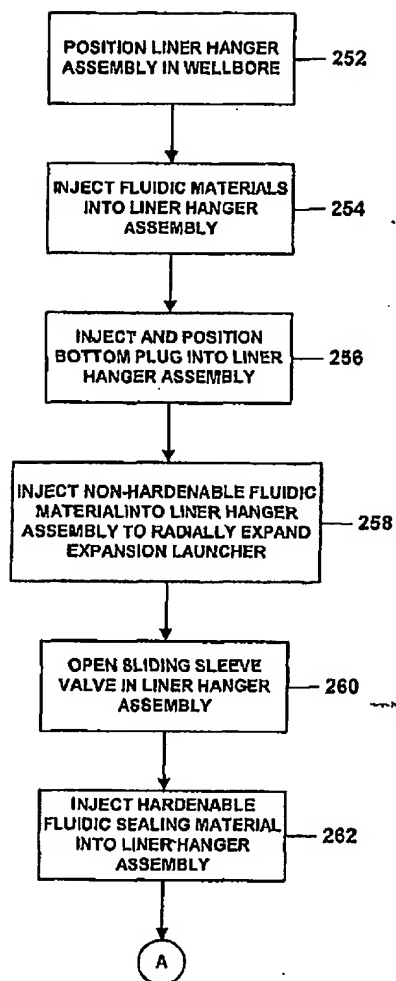


Fig. 11a

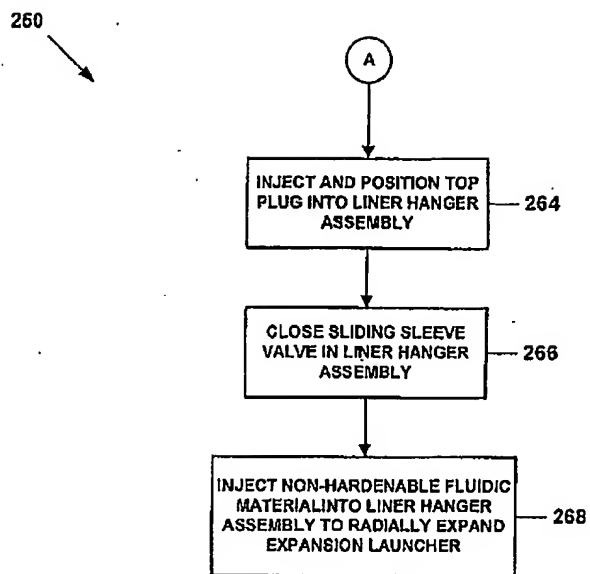
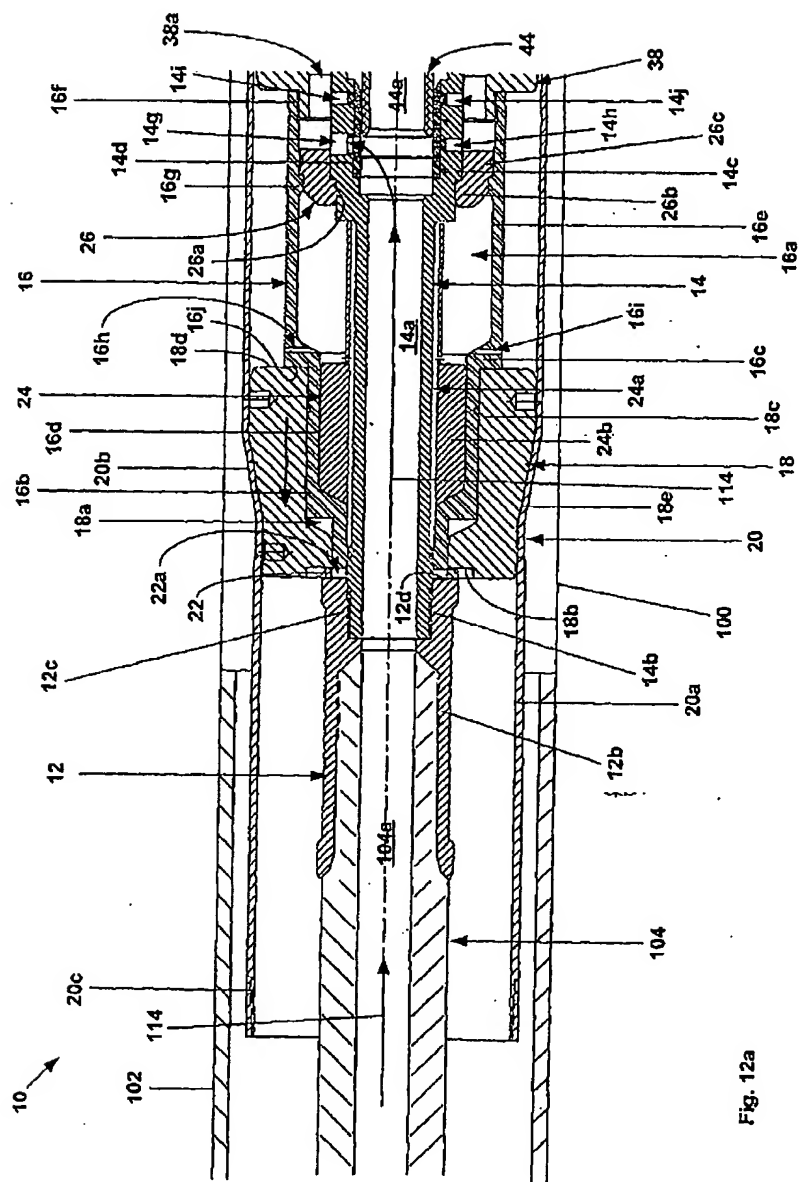


Fig. 11b



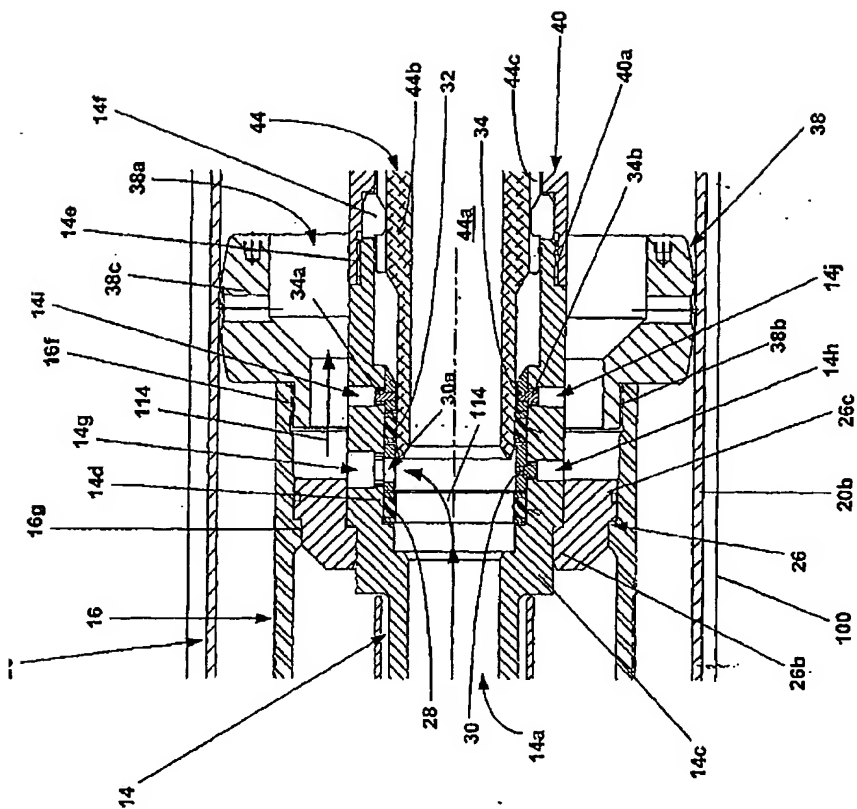


Fig. 12b



Fig. 13a

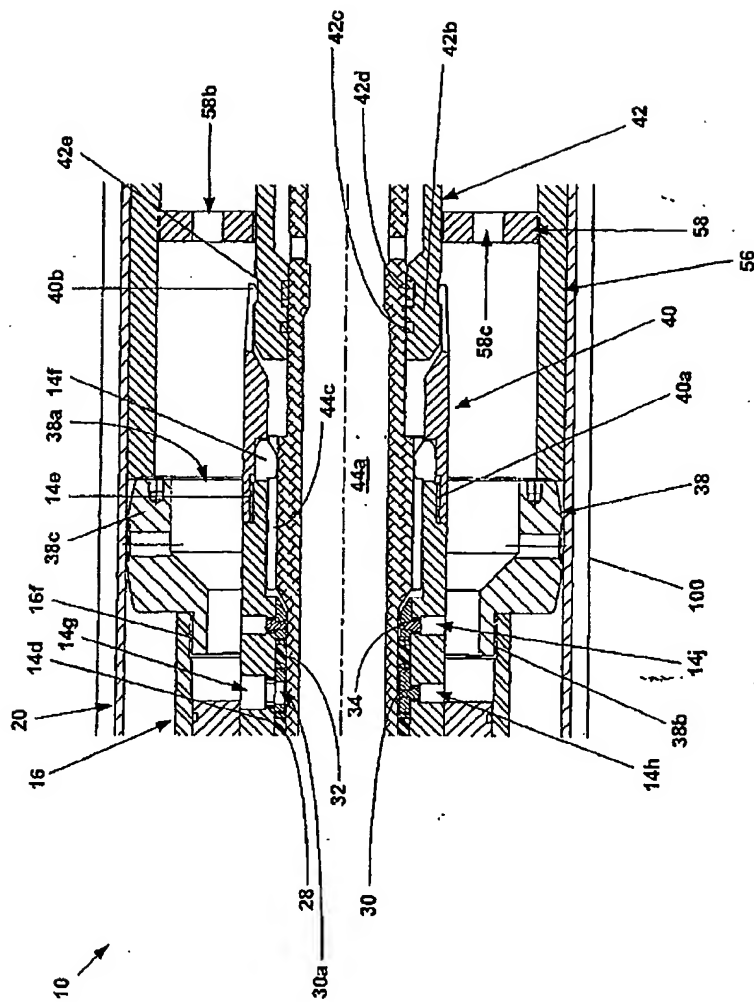
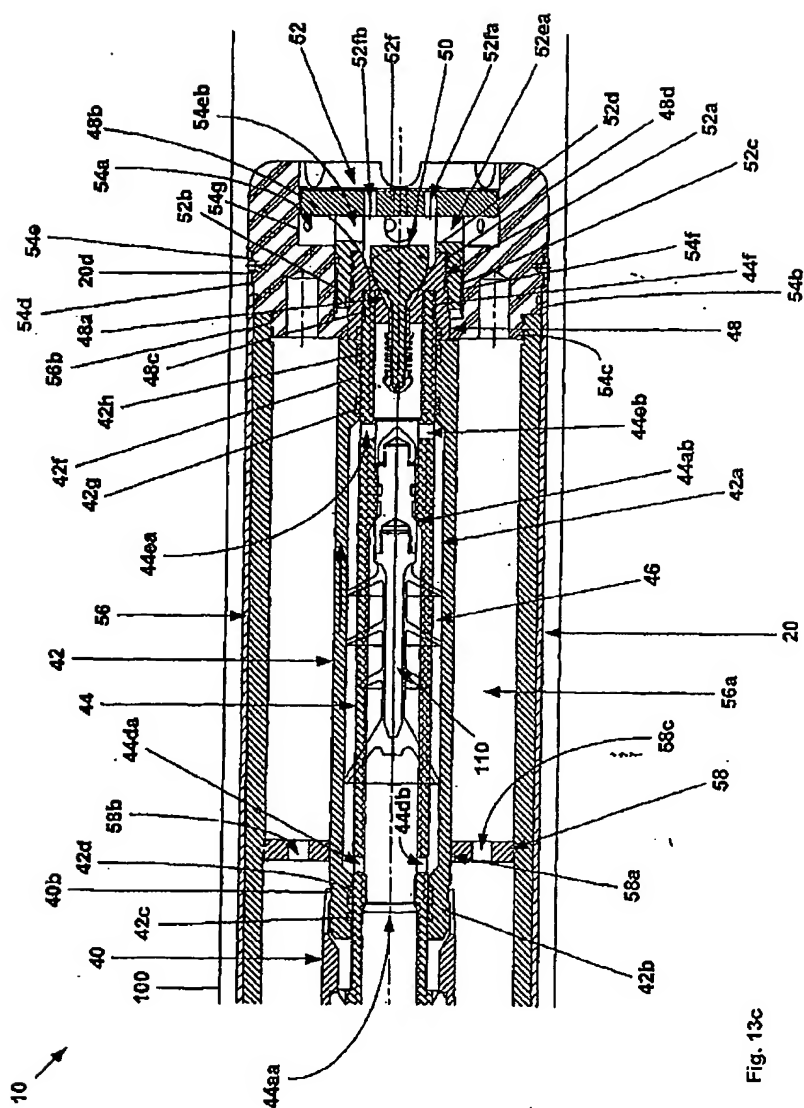


Fig. 13b



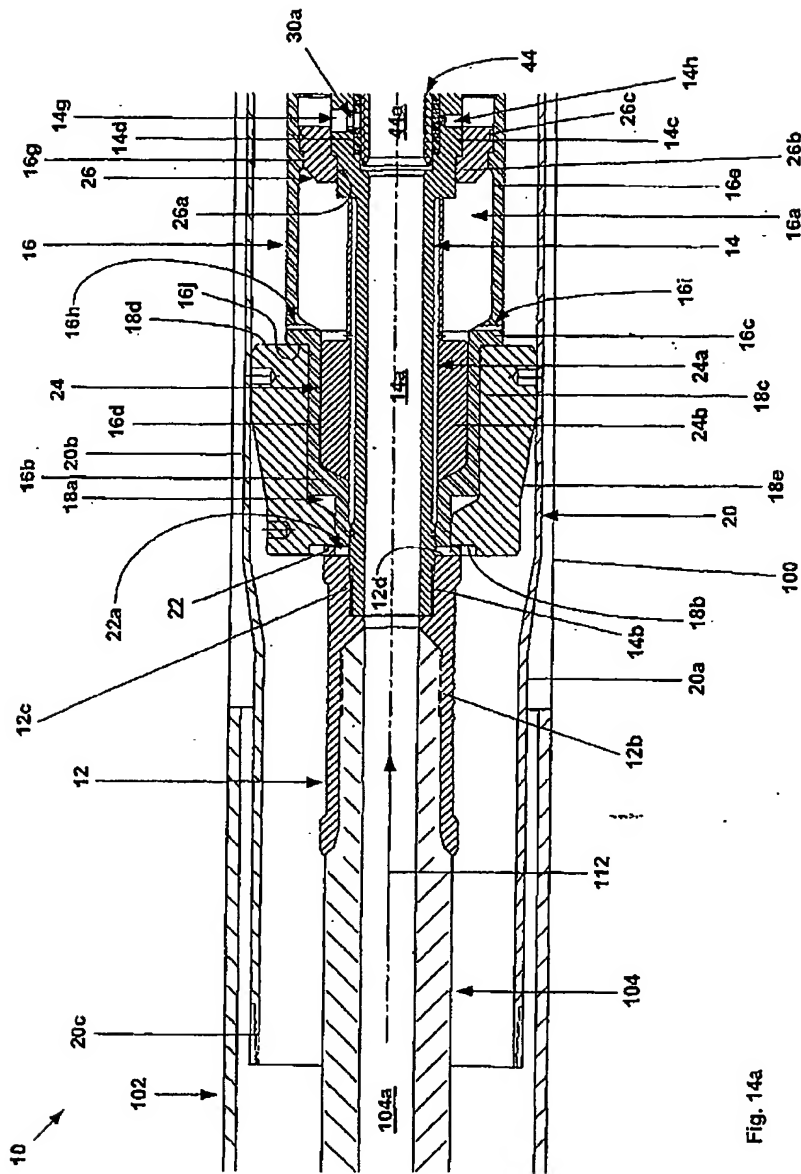
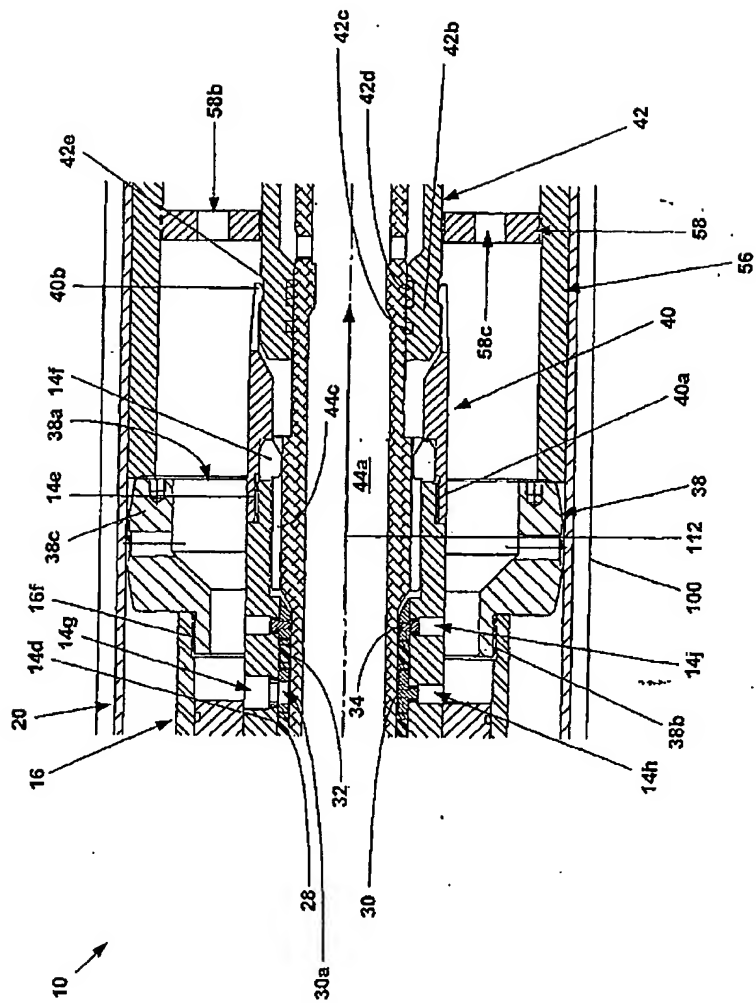
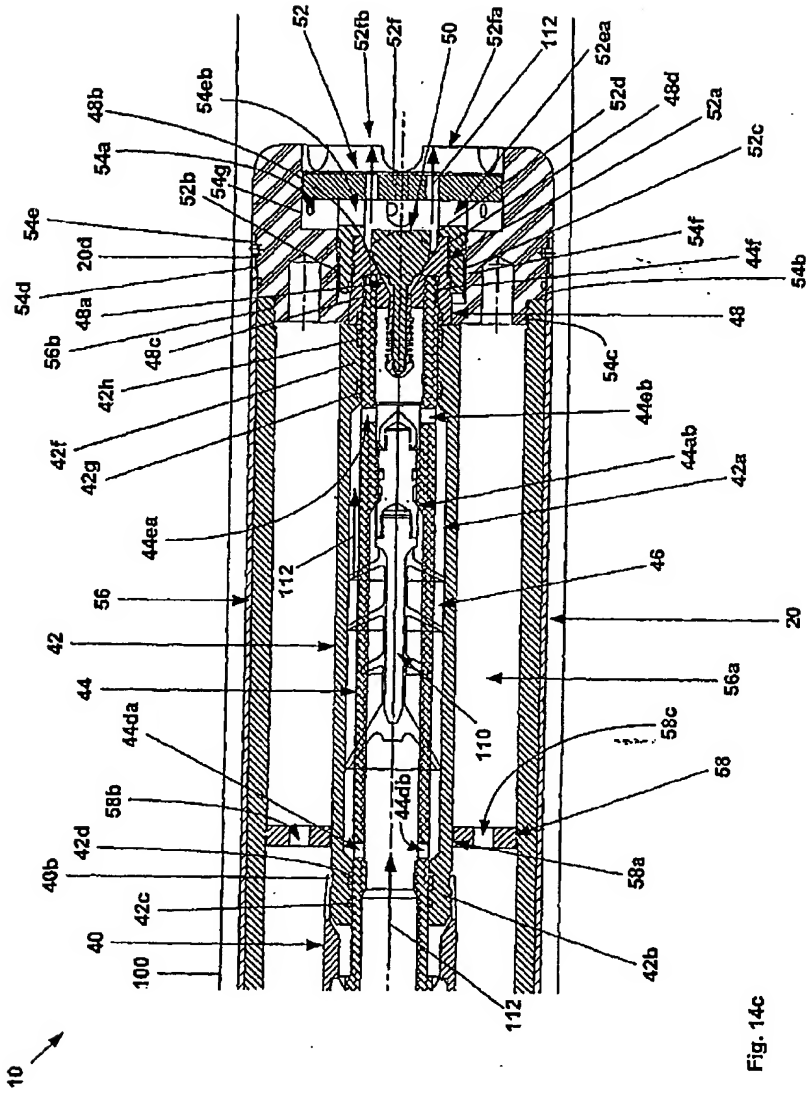


Fig. 14a





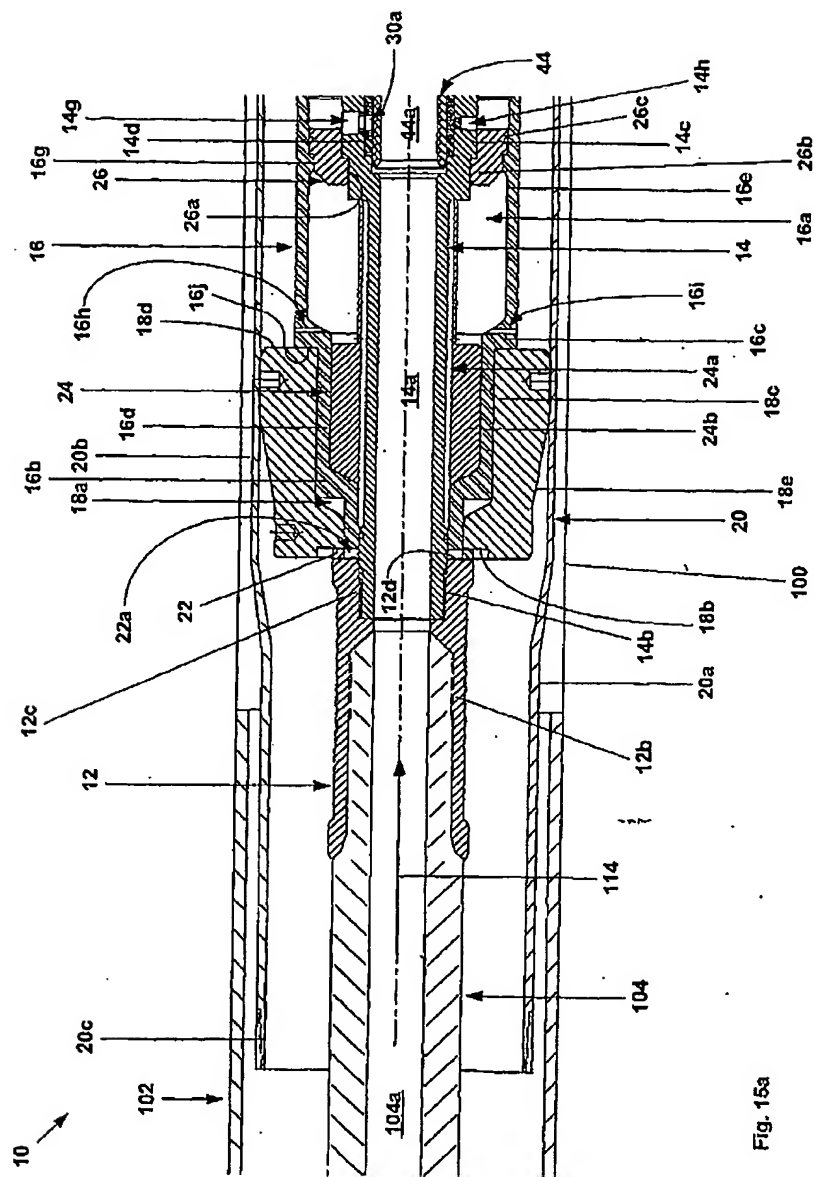


Fig. 15a

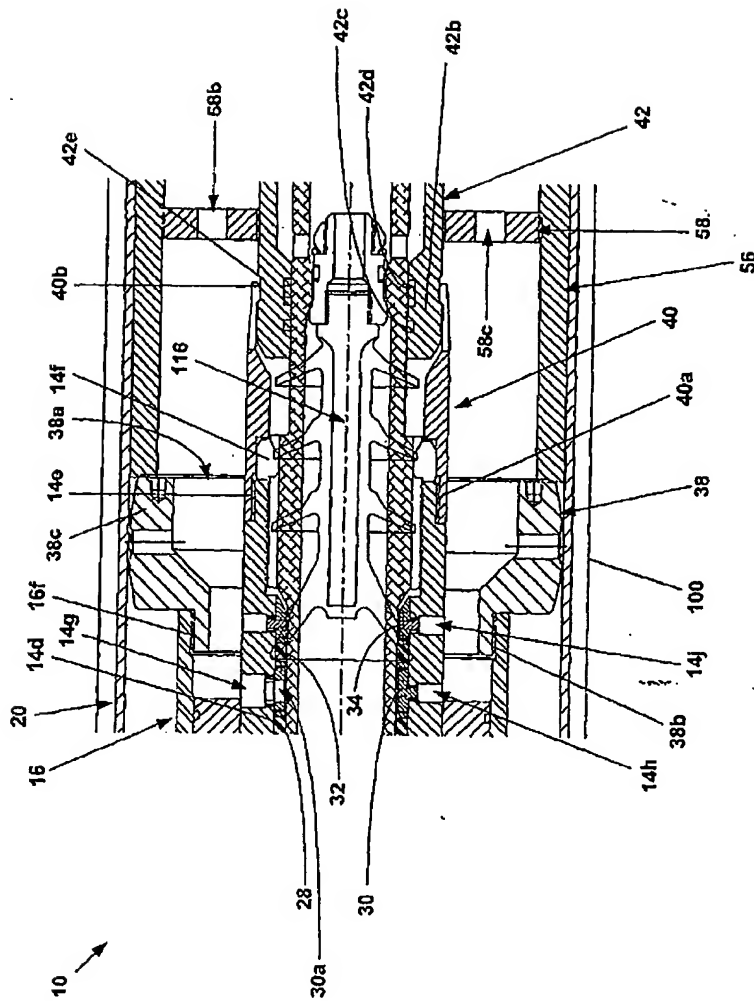
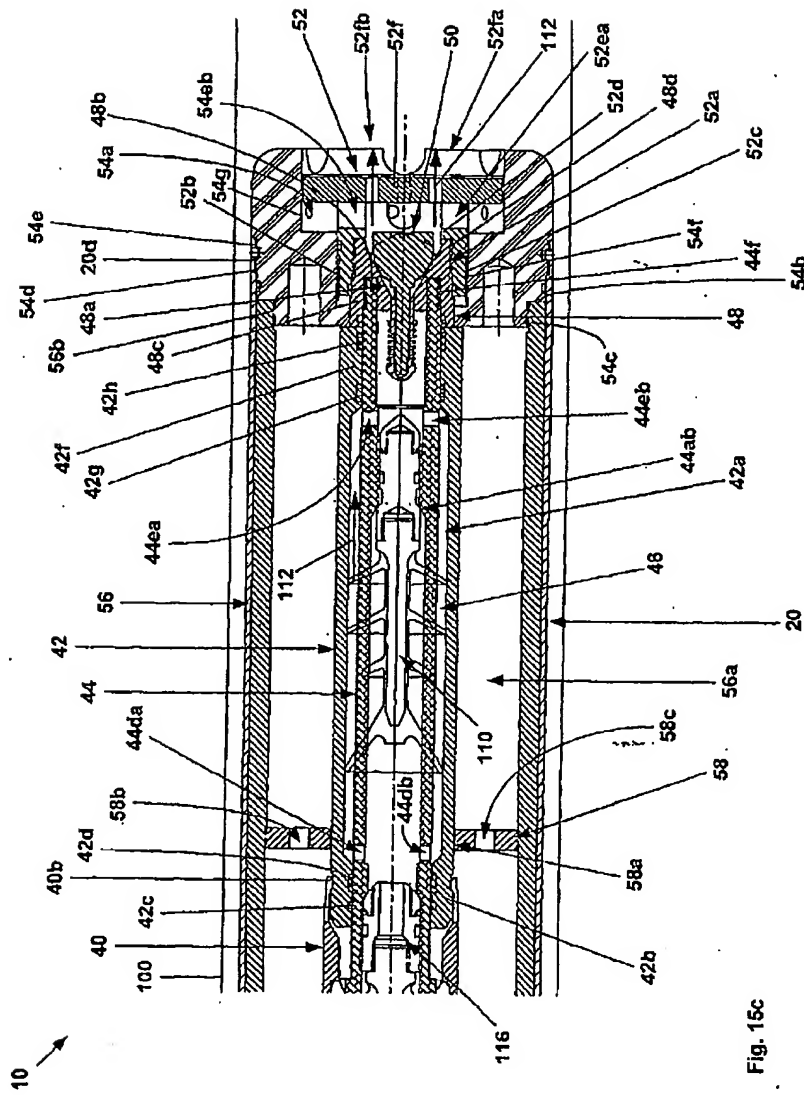


Fig. 15b



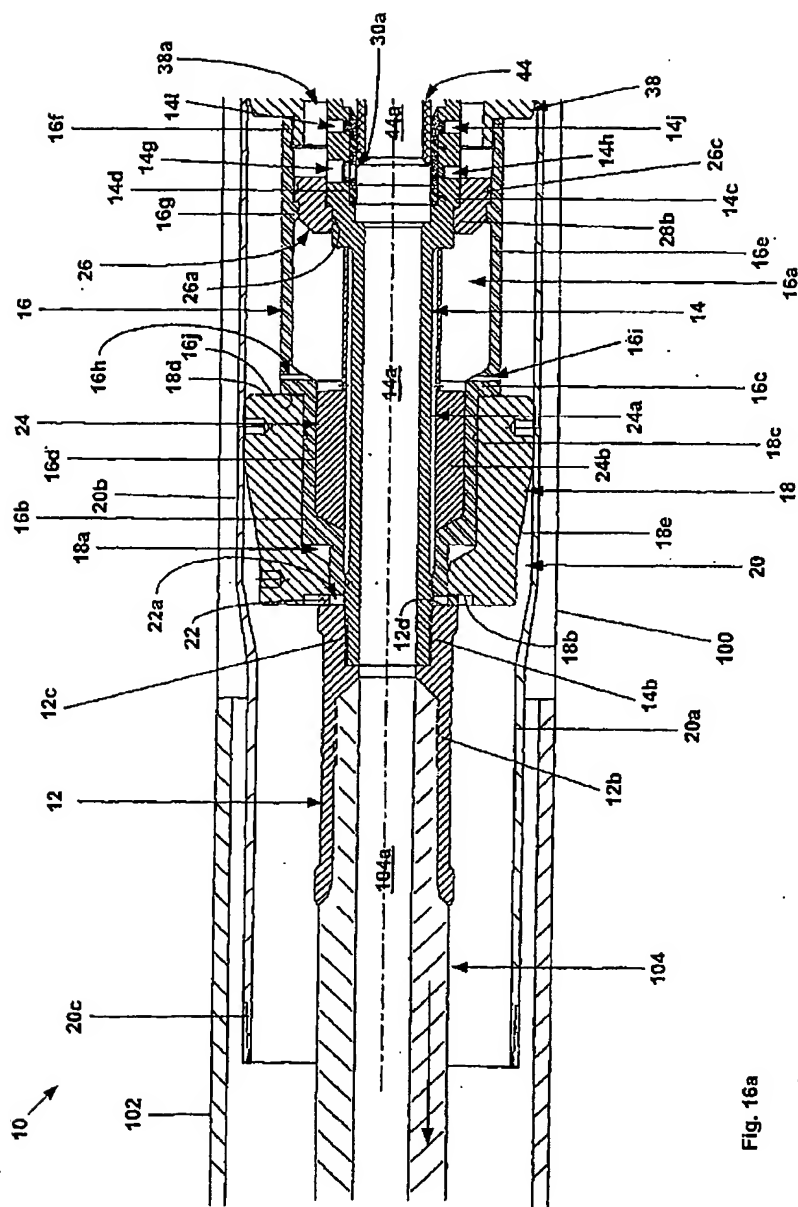


Fig. 16a

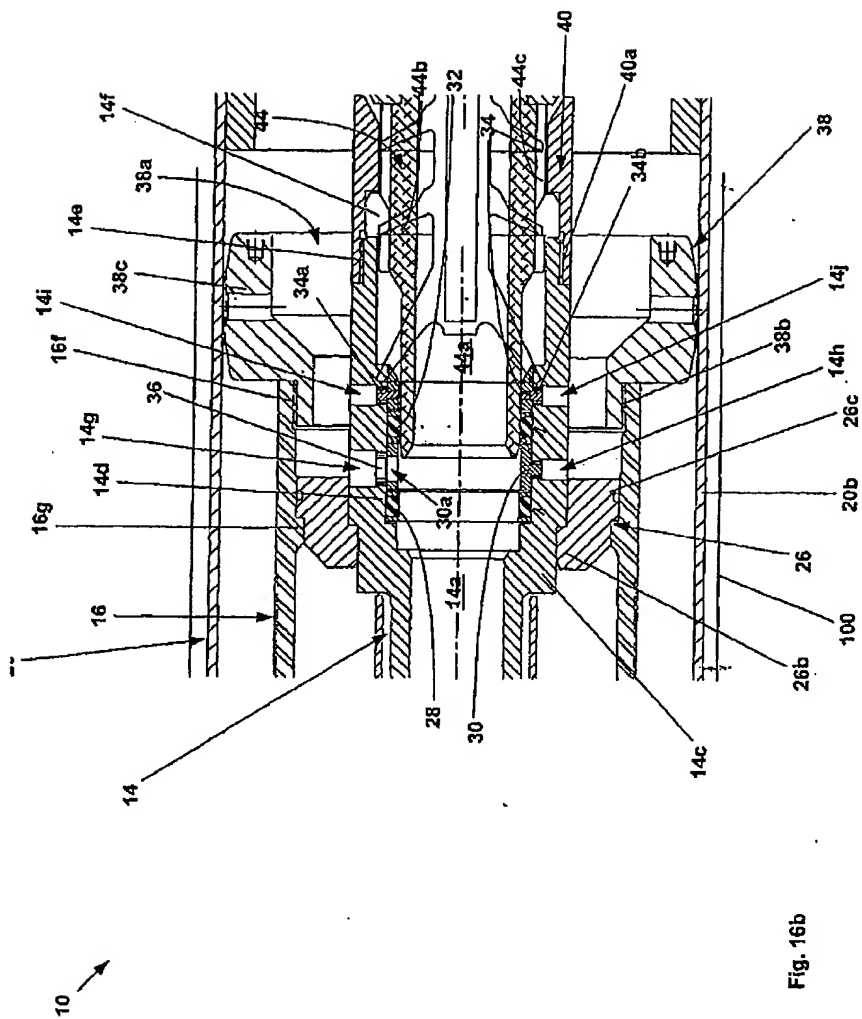


Fig. 16b

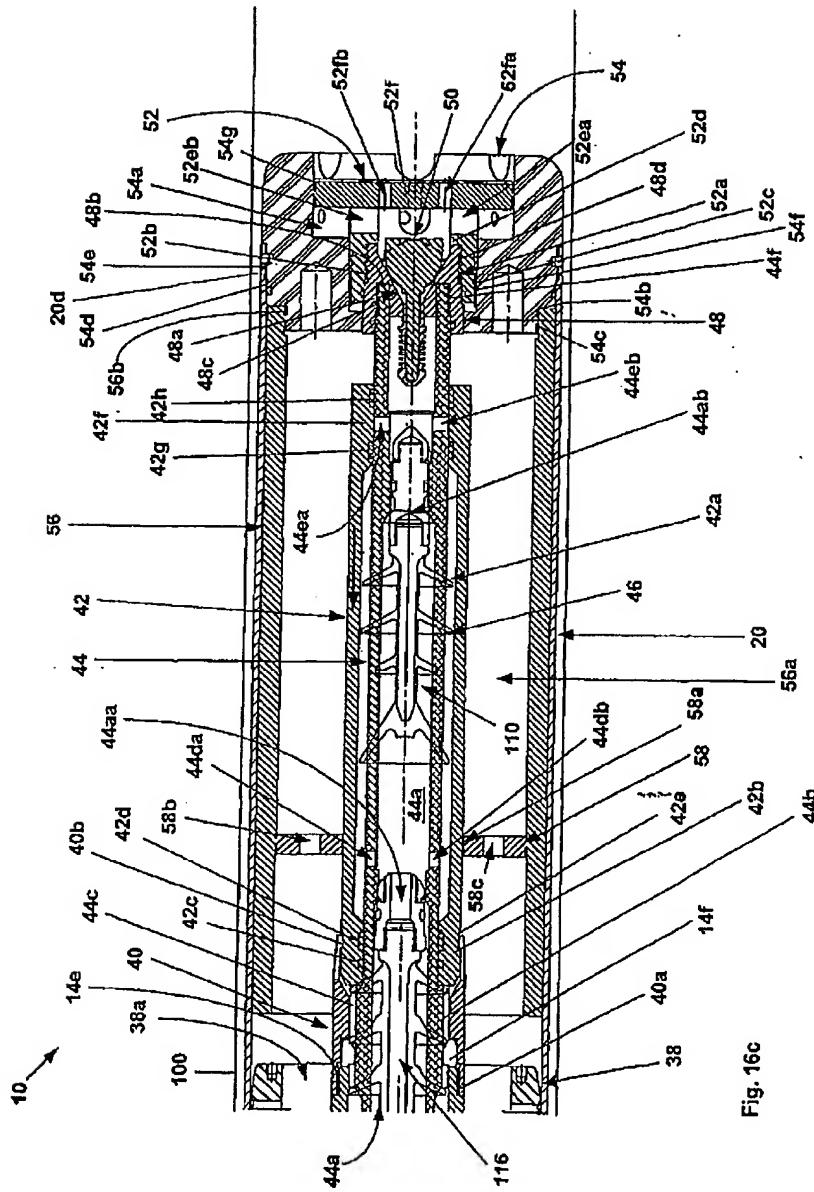


Fig. 16c

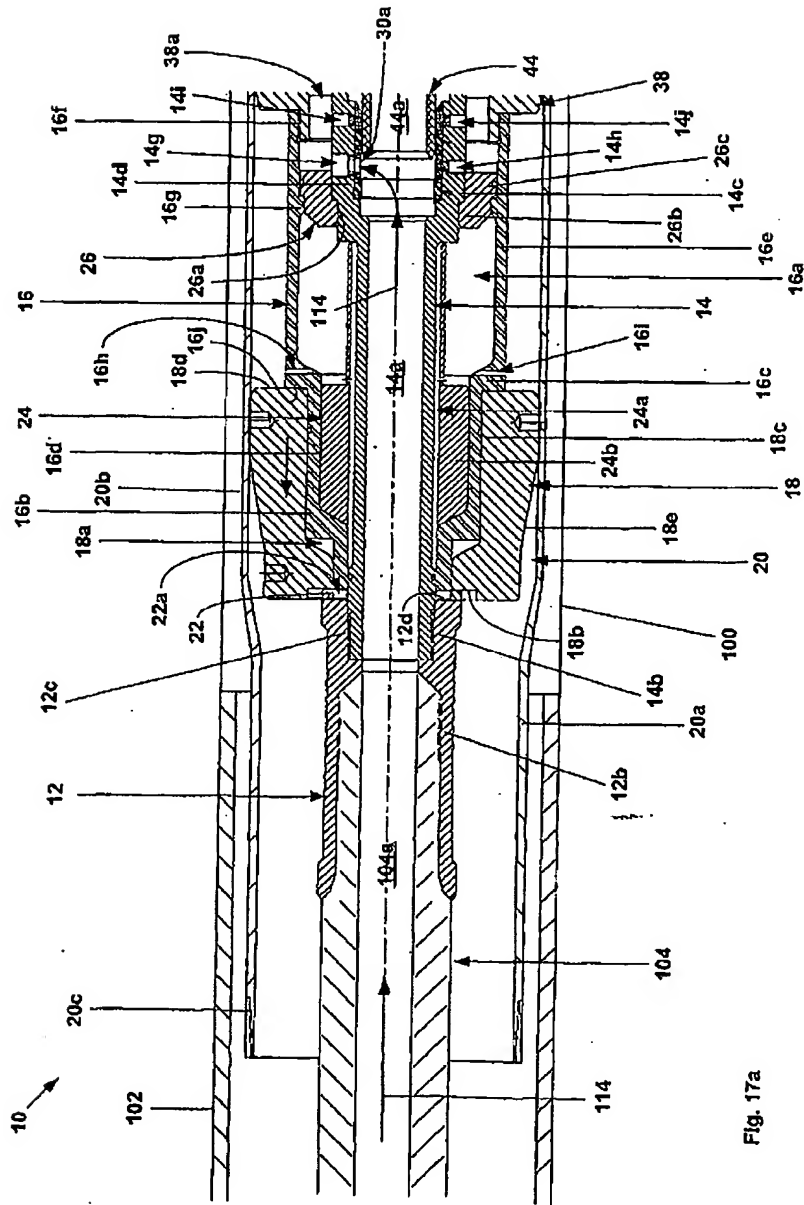


Fig. 17a

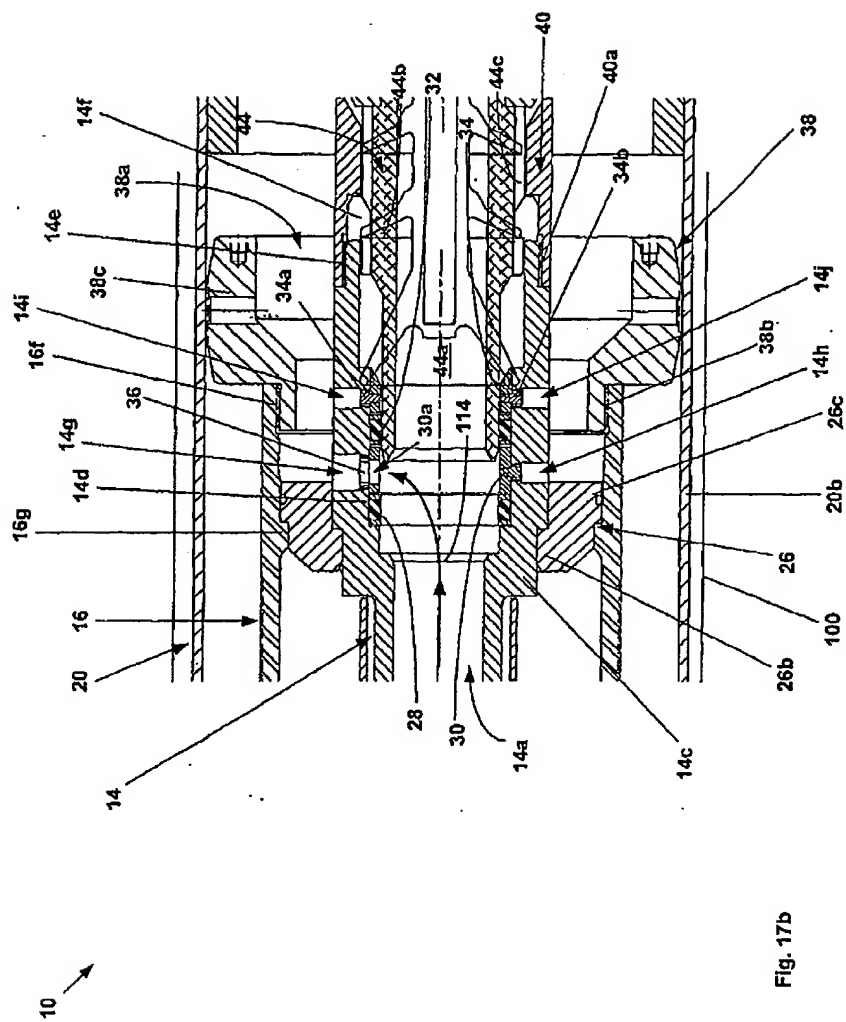
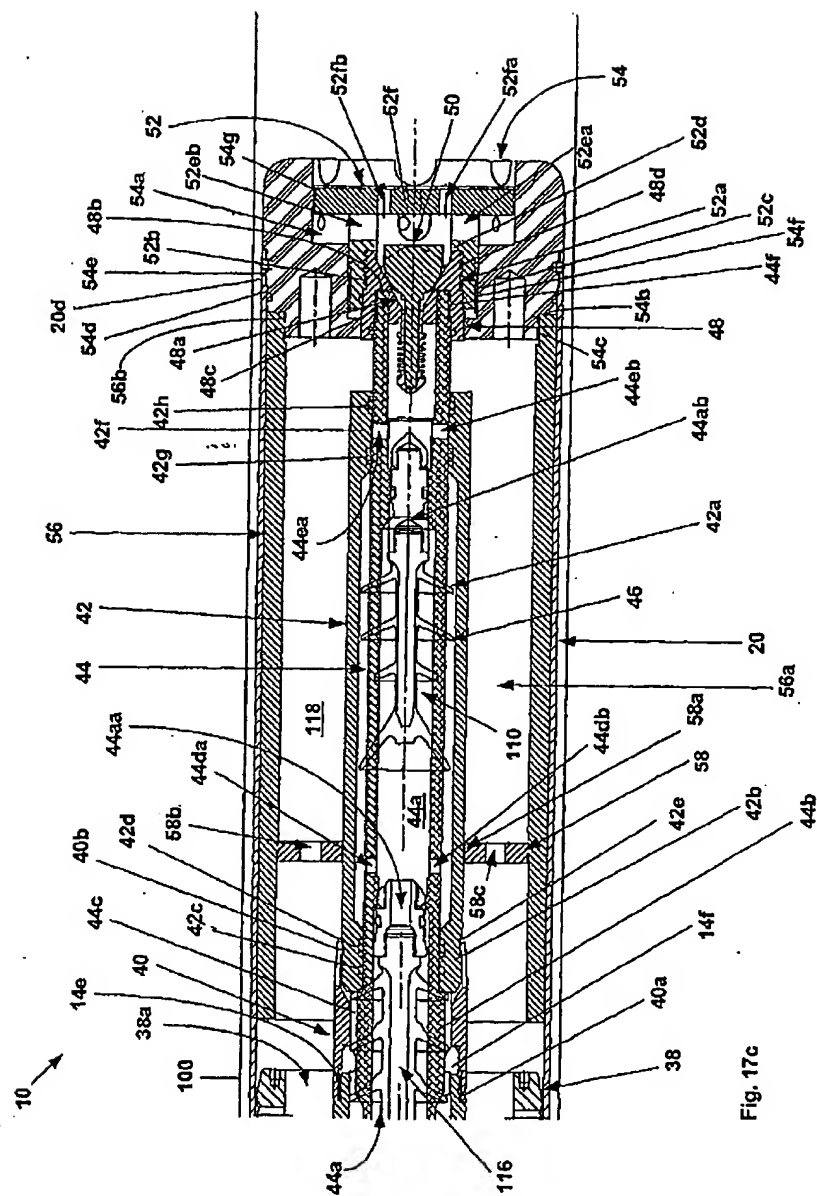


Fig. 17b



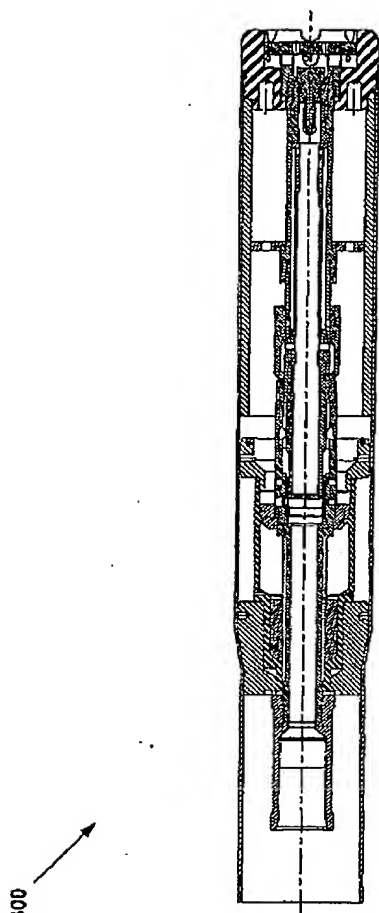


Fig. 18

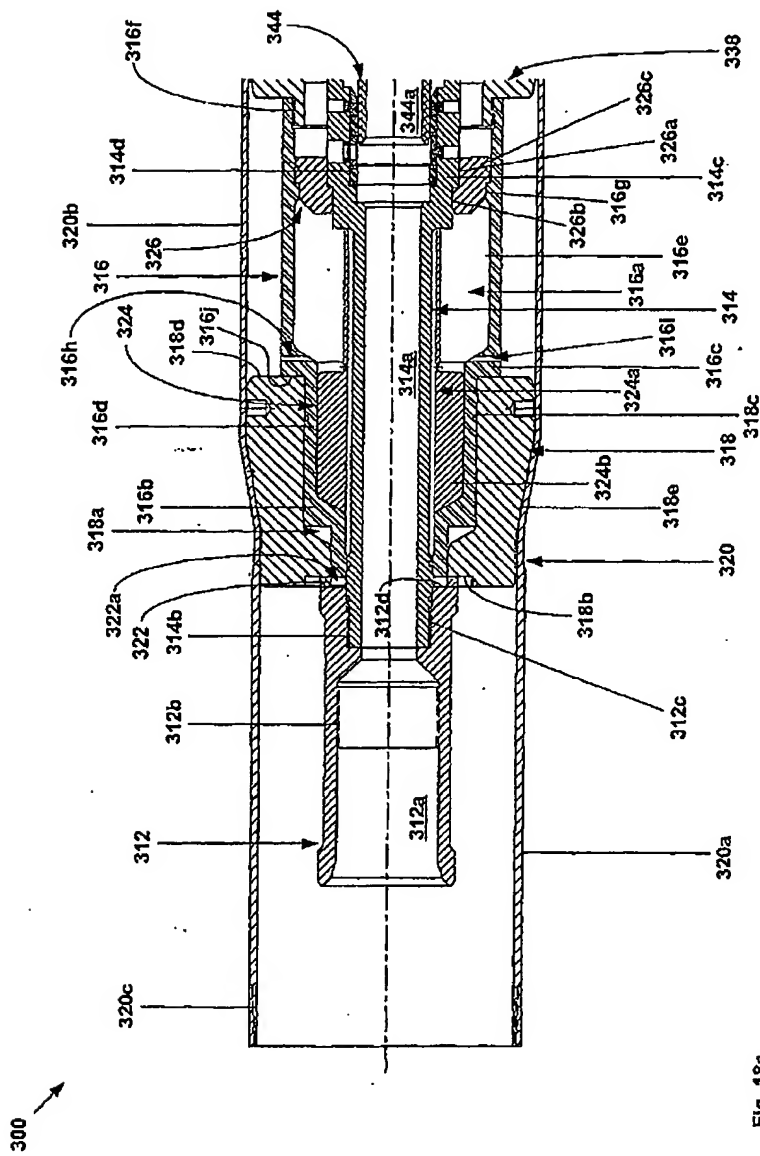
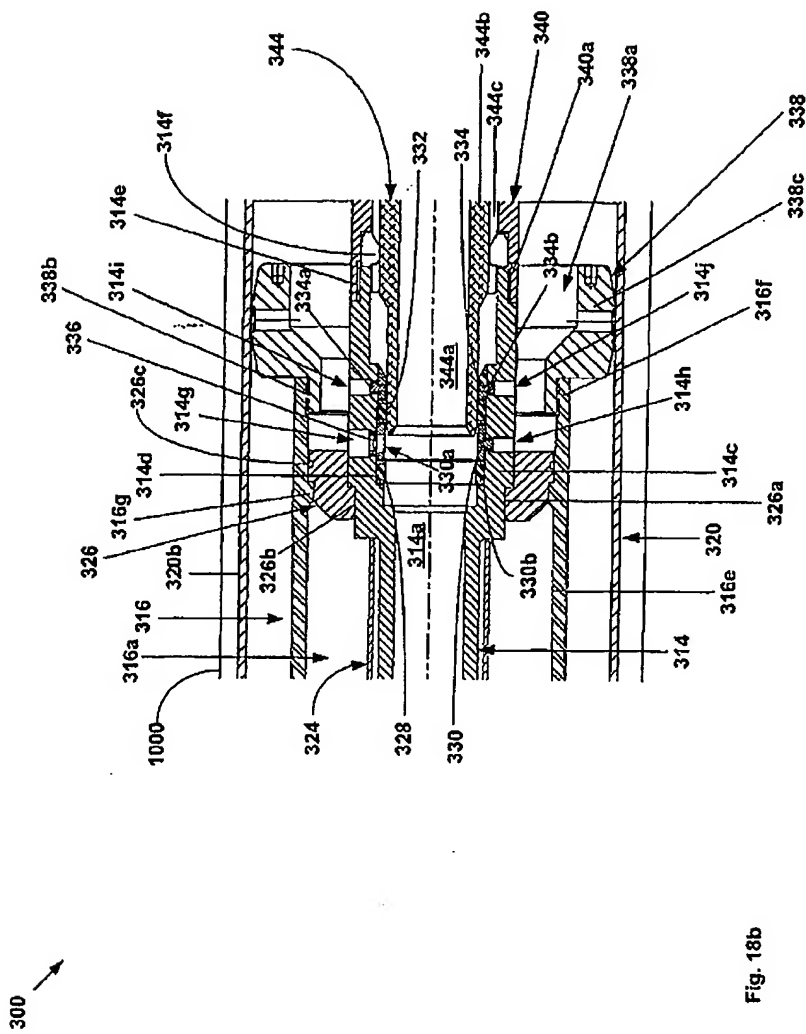


Fig. 18a



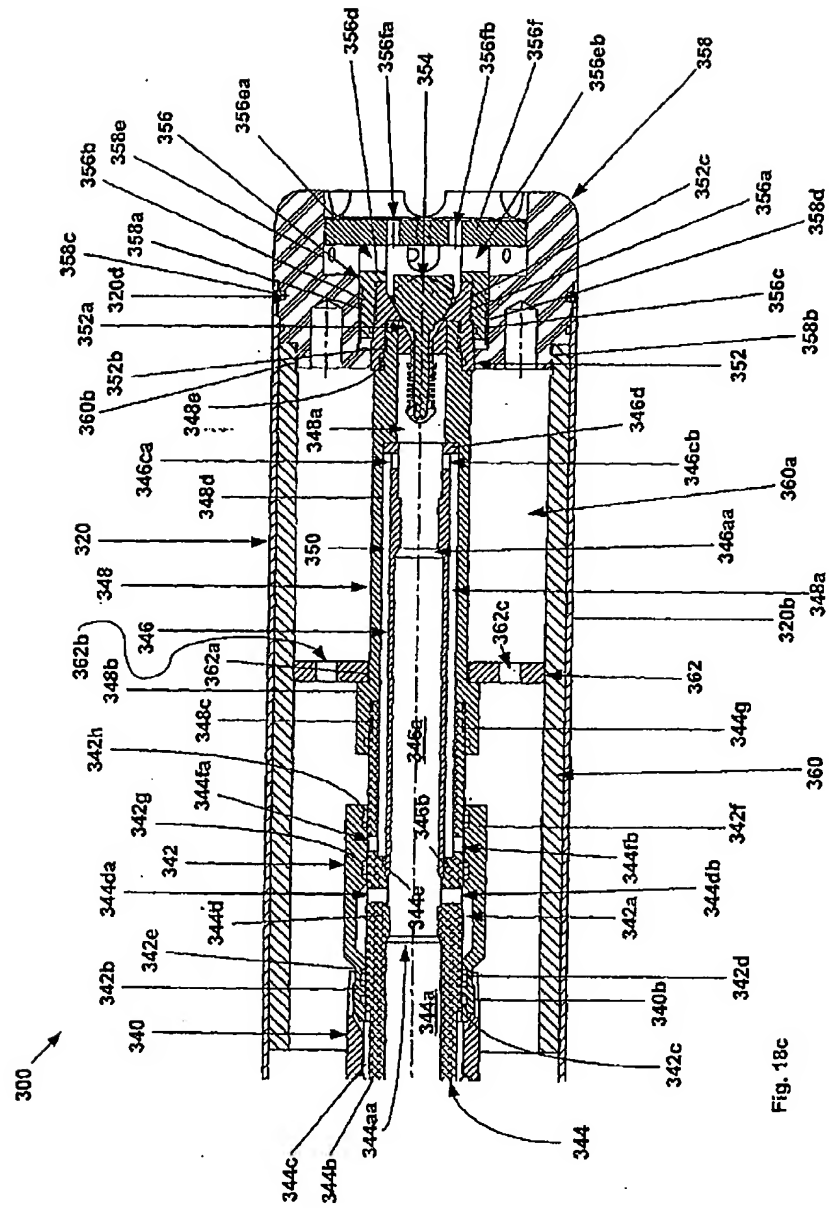


Fig. 18c

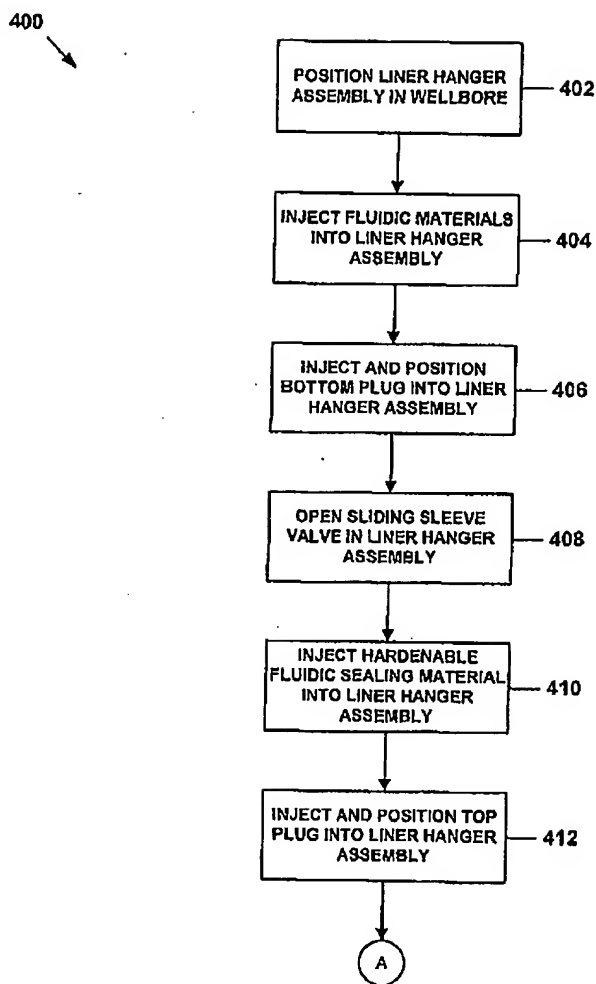


Fig. 19a

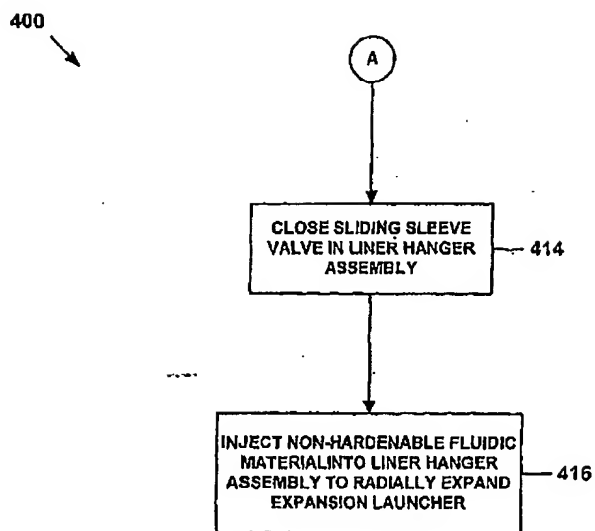


Fig. 19b

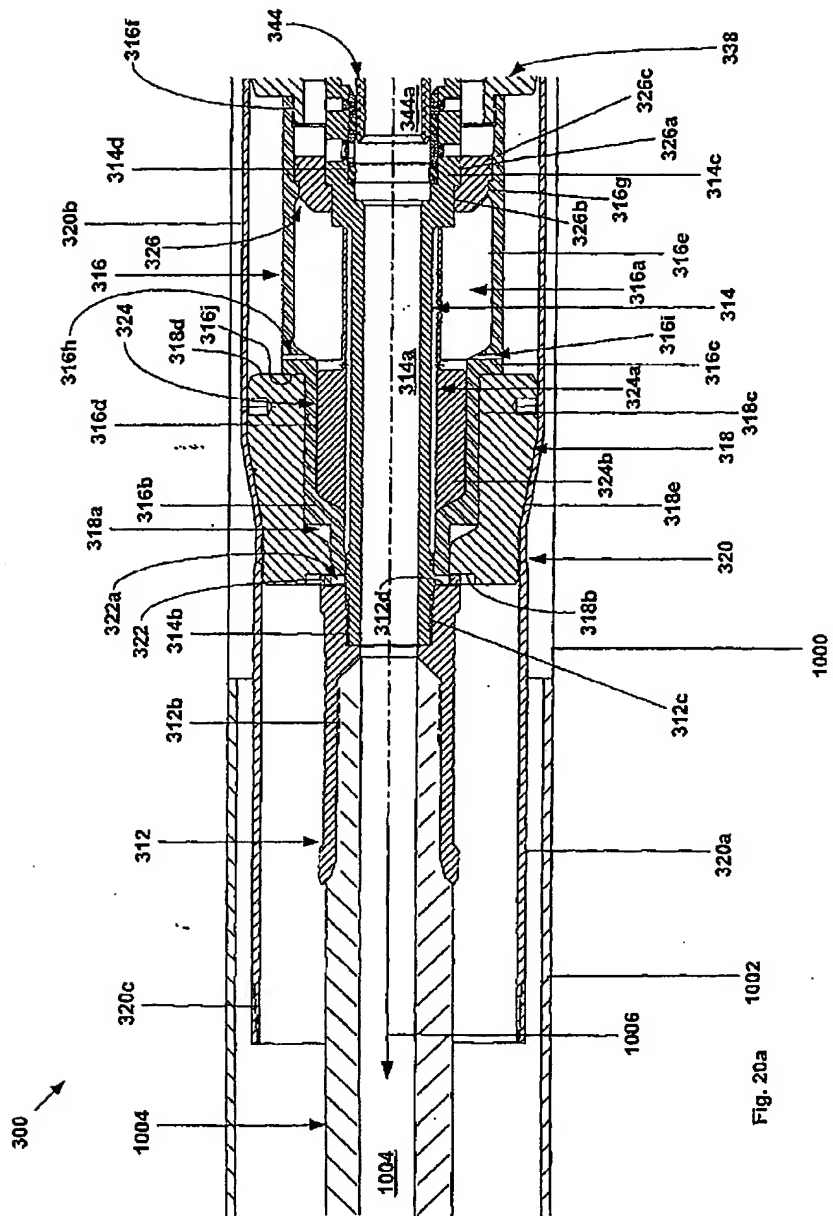
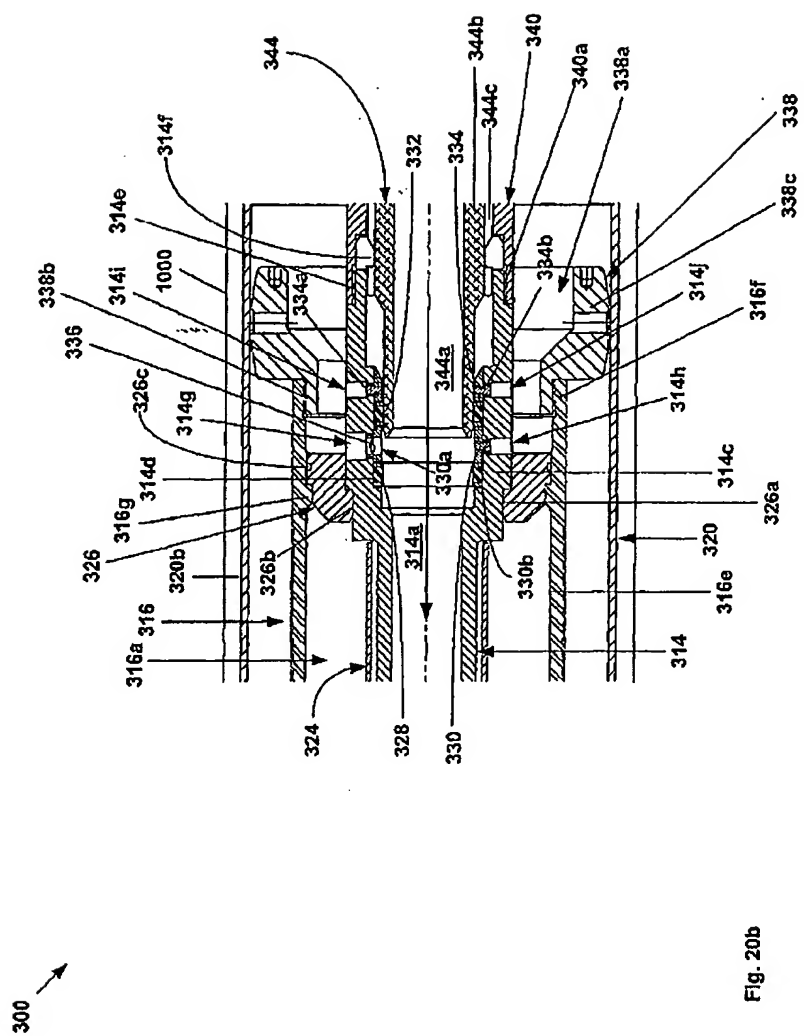
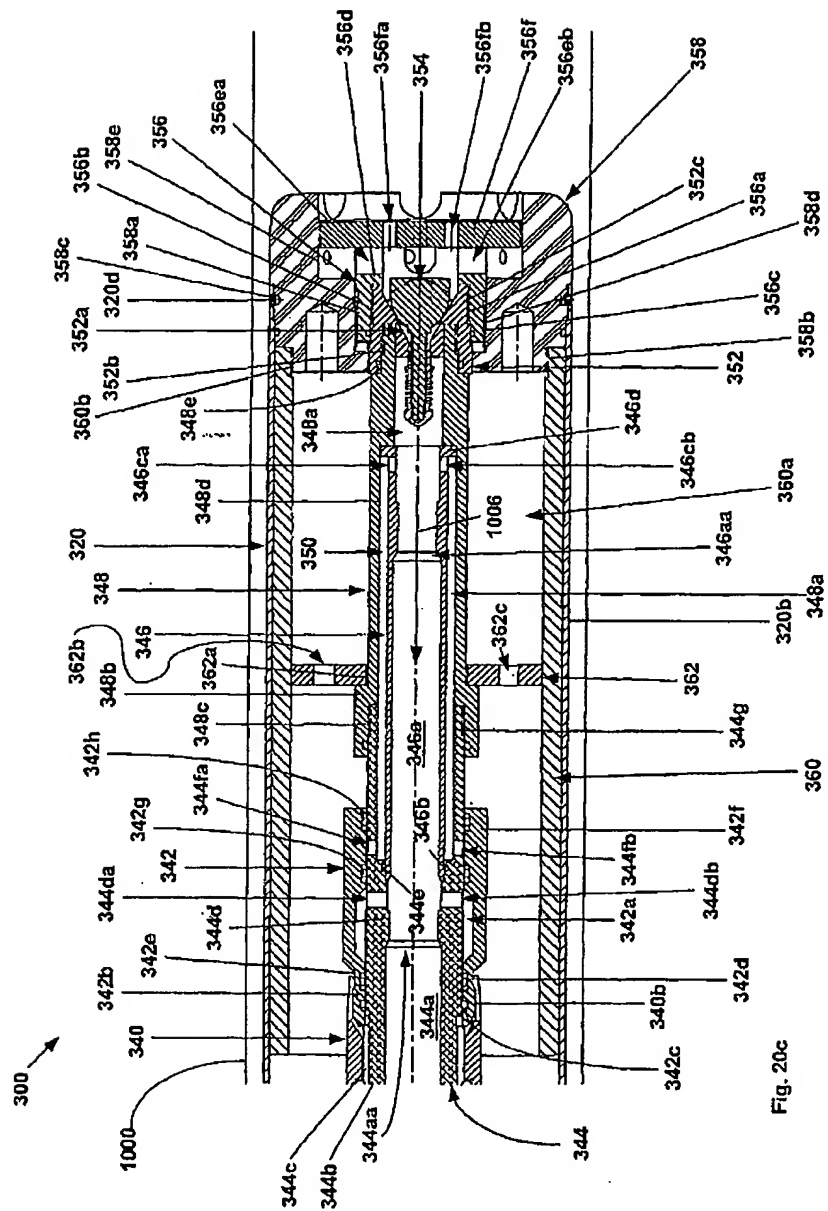


Fig. 20a





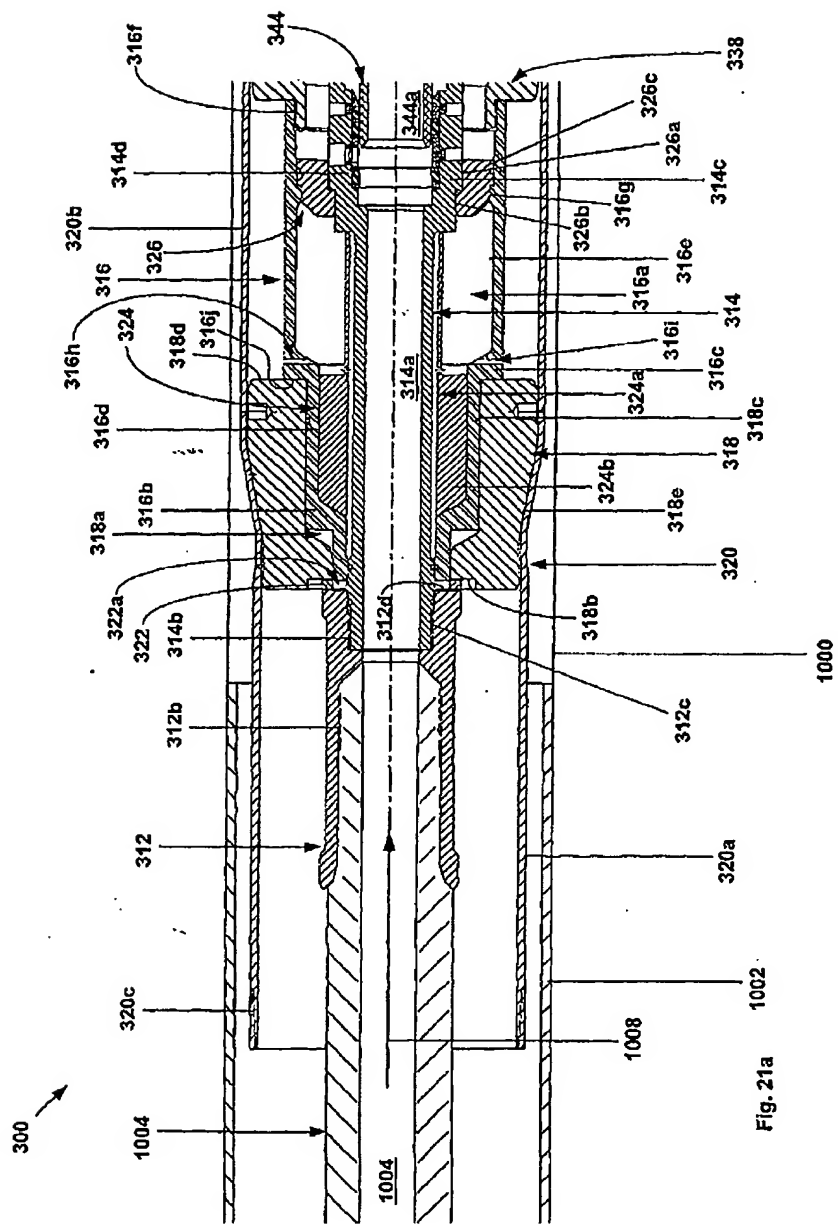
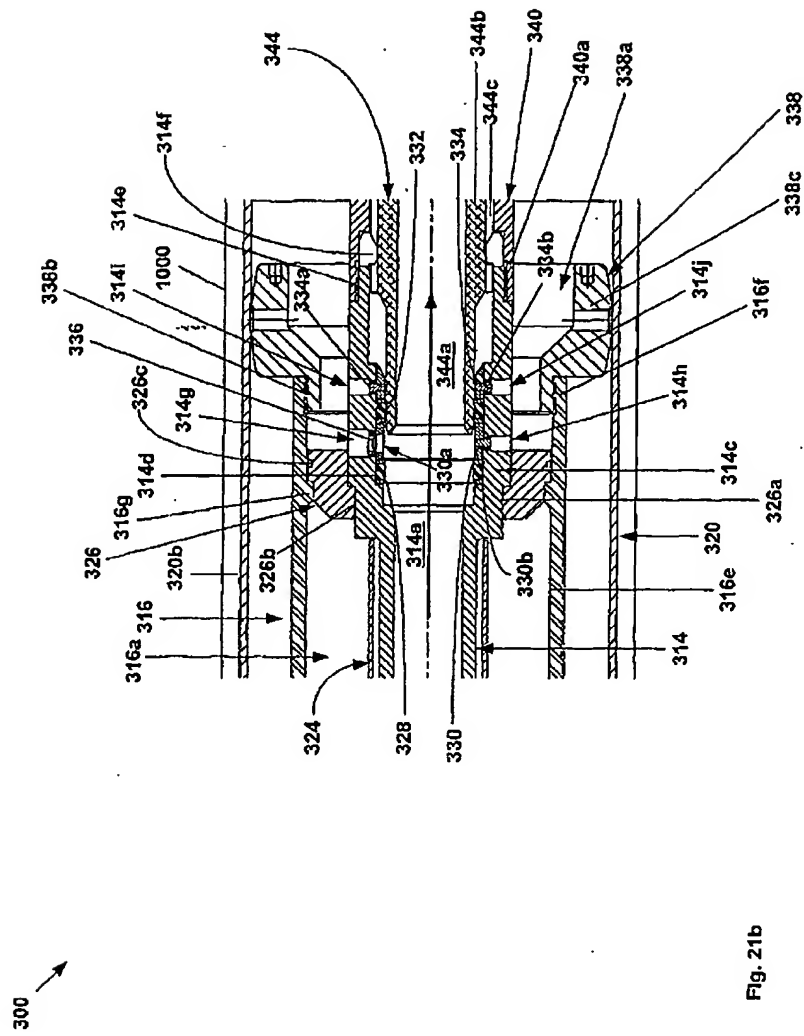


Fig. 21a



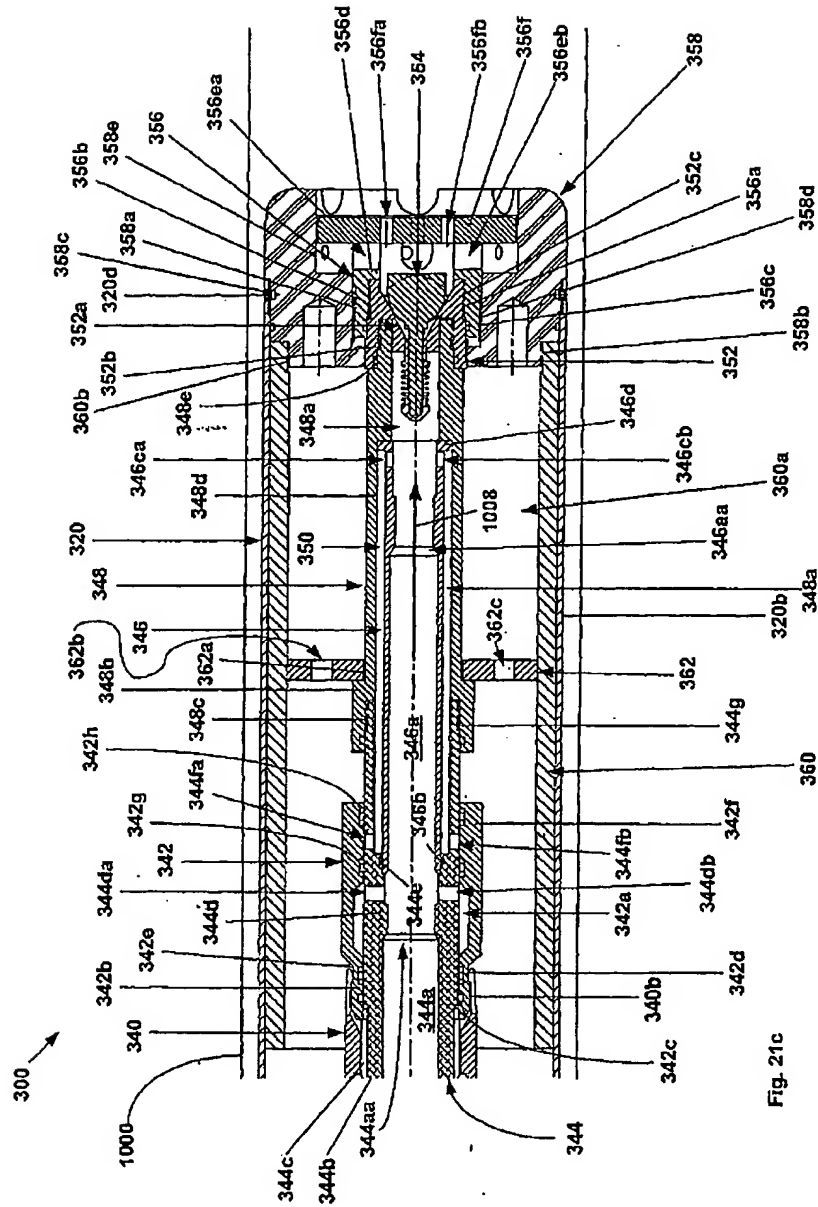


Fig. 21c

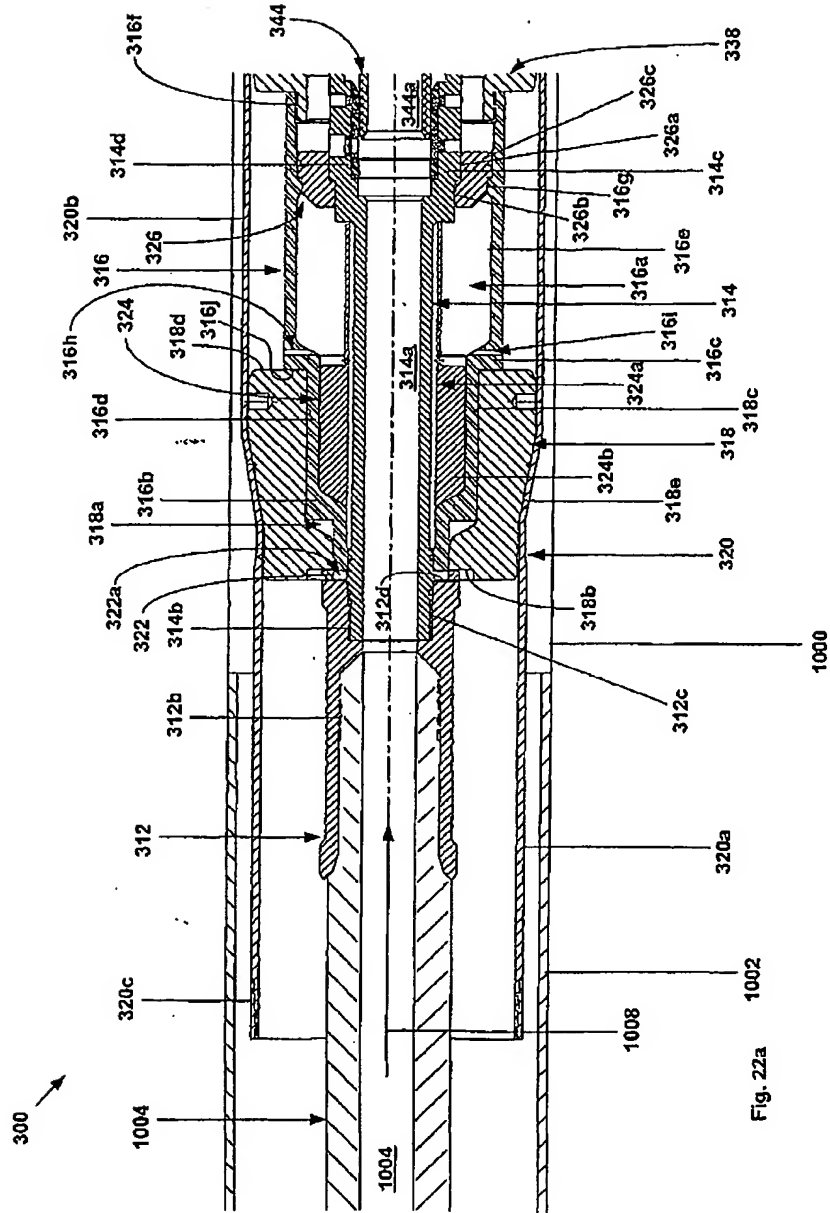


Fig. 22a

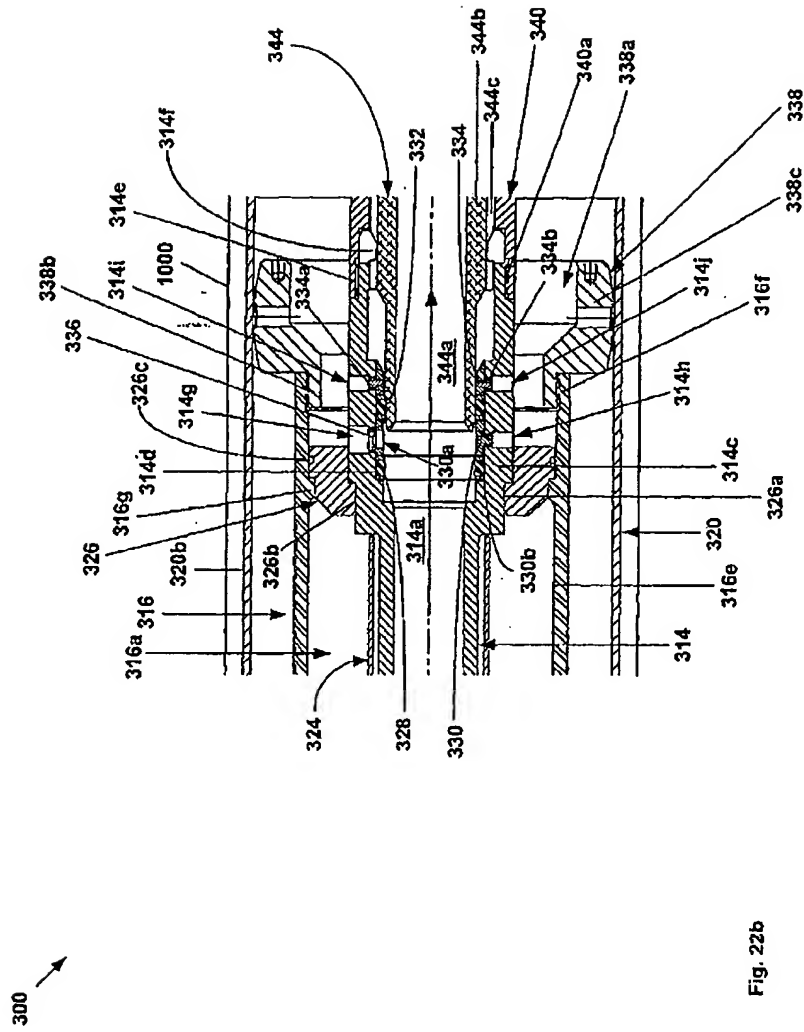
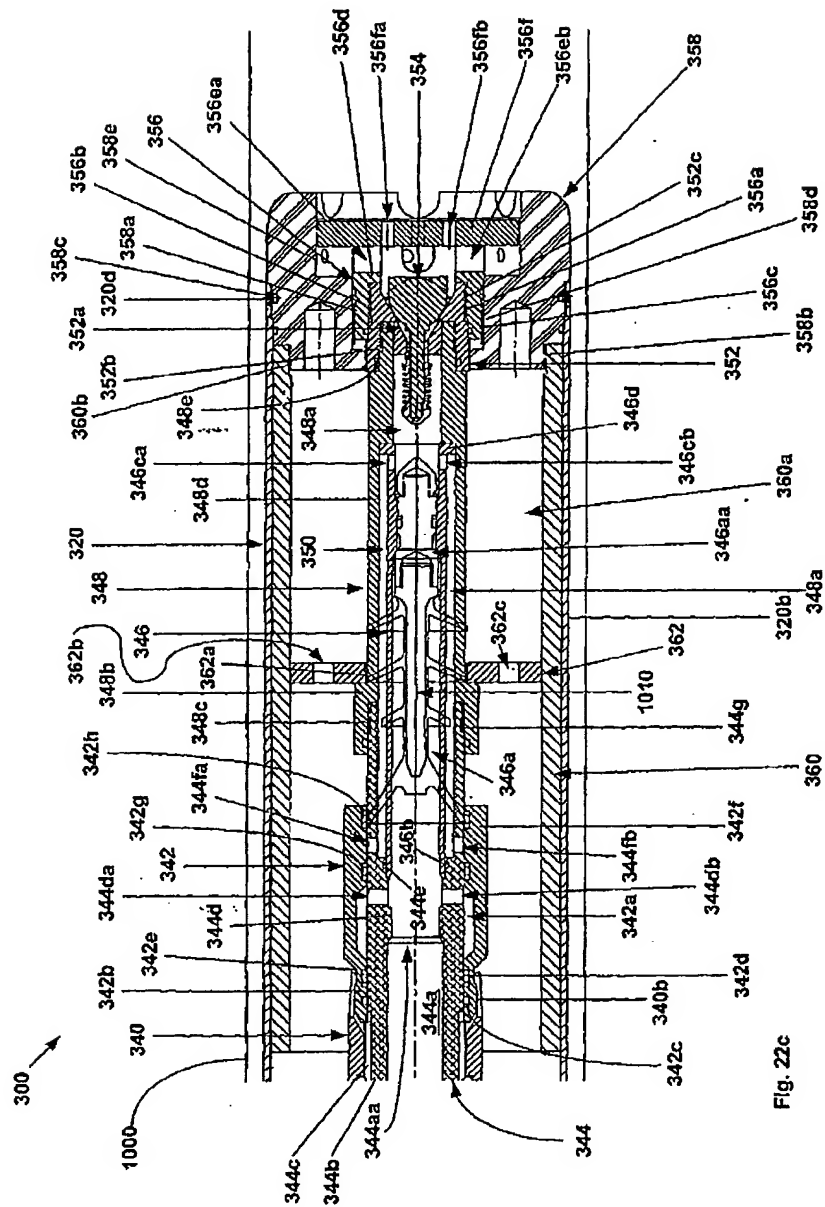
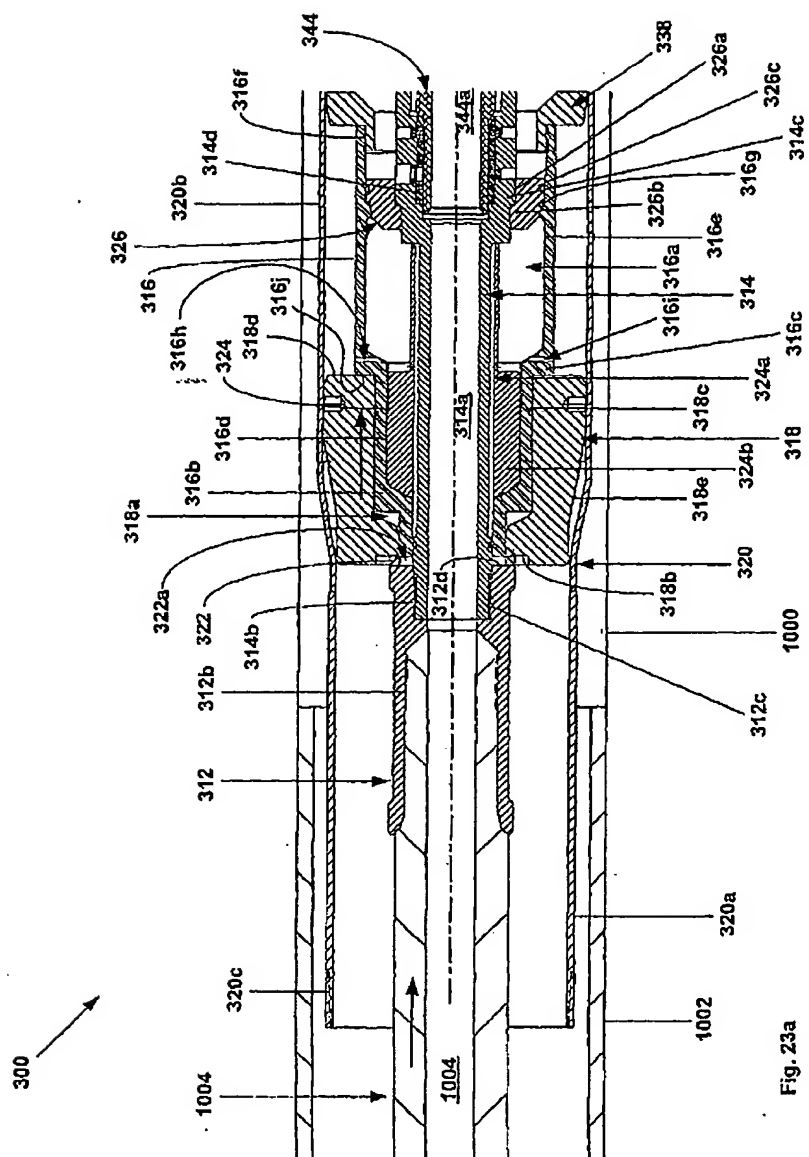


Fig. 22b





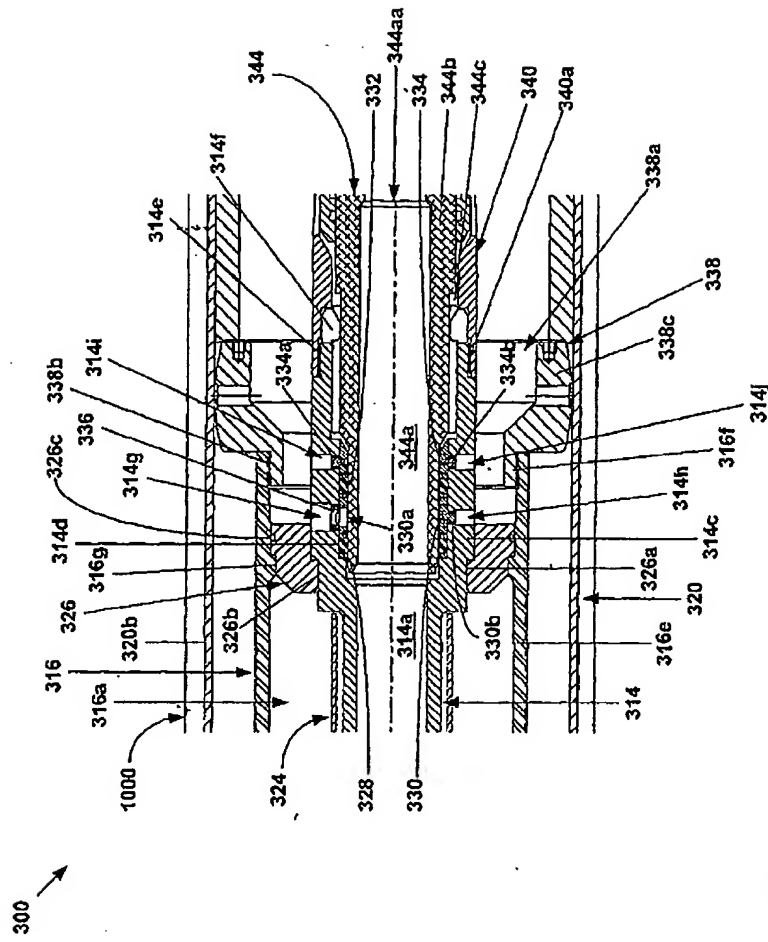


Fig. 23b

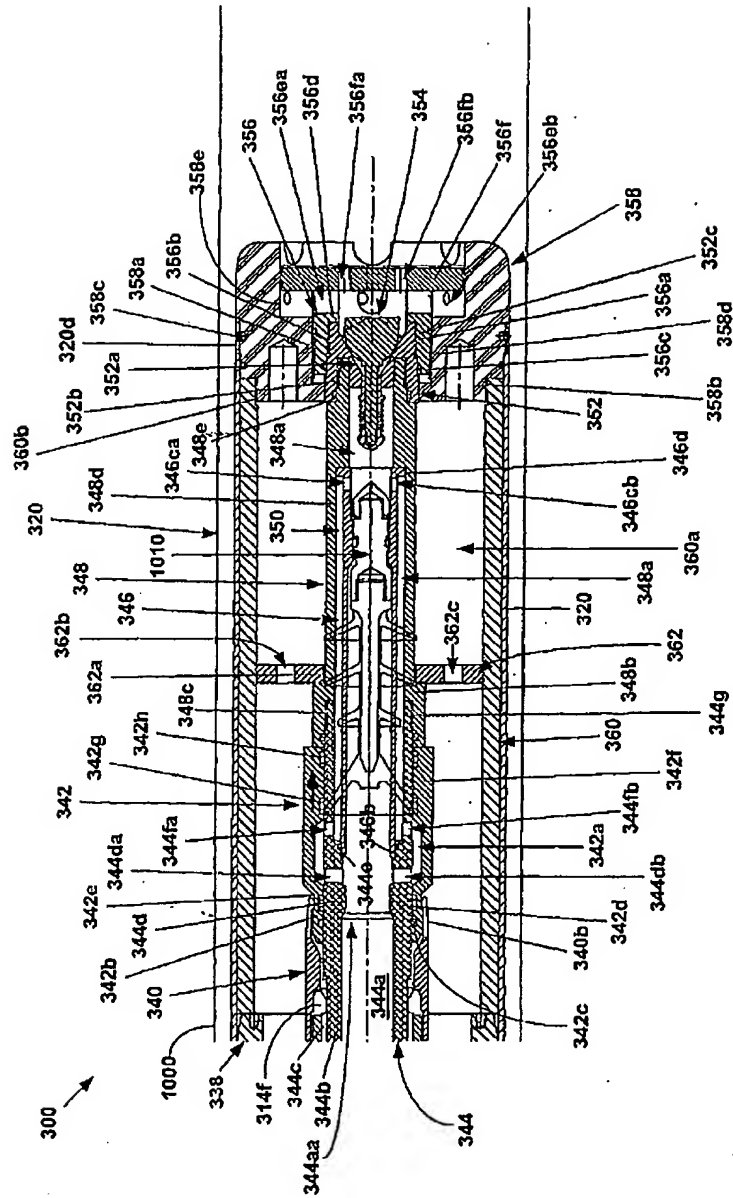
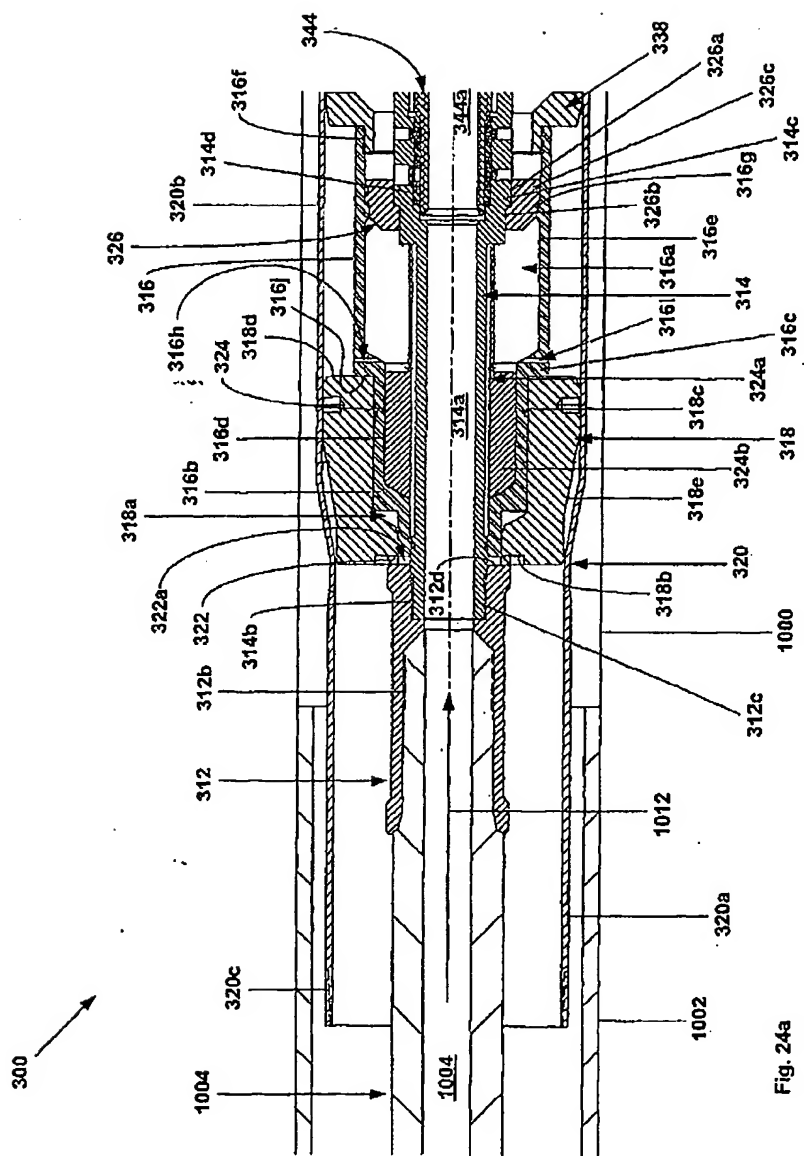
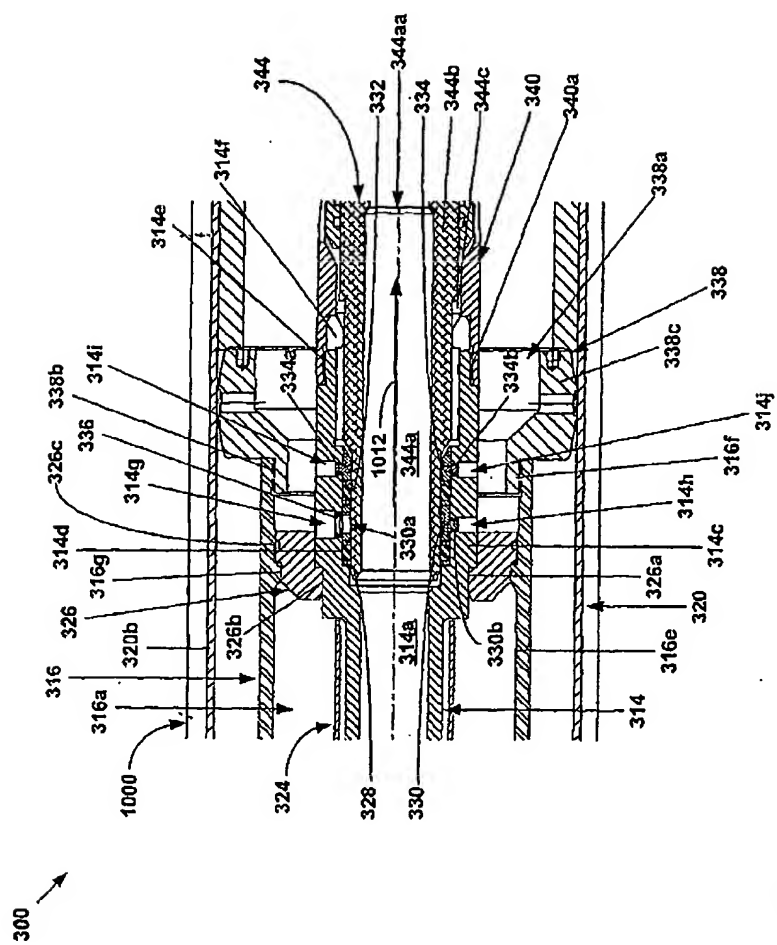


Fig. 23c





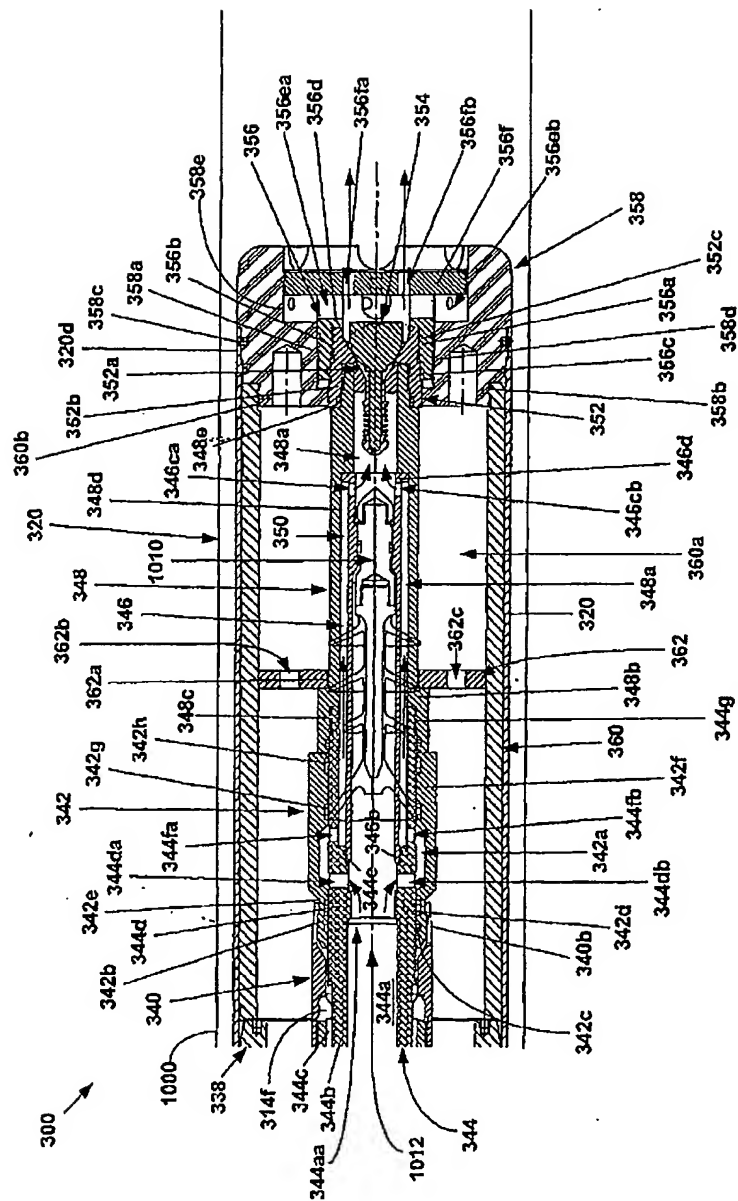


Fig. 24c

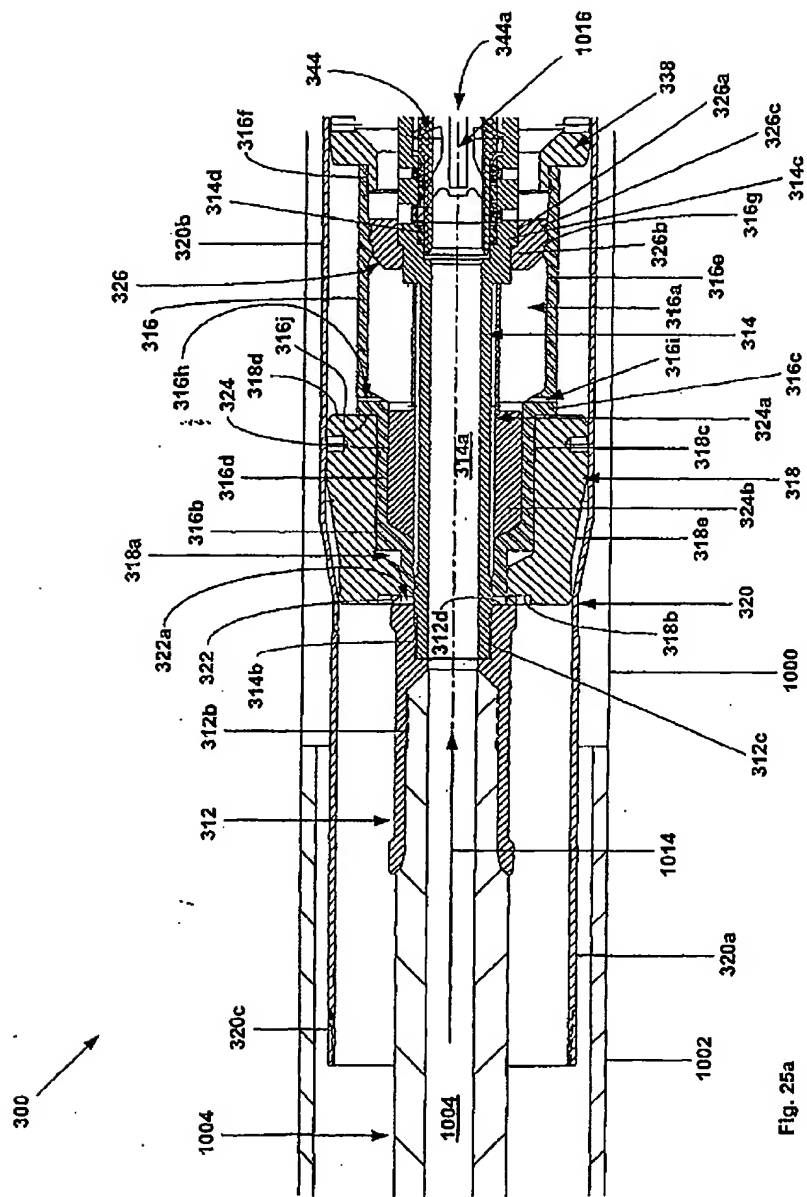


Fig. 25a

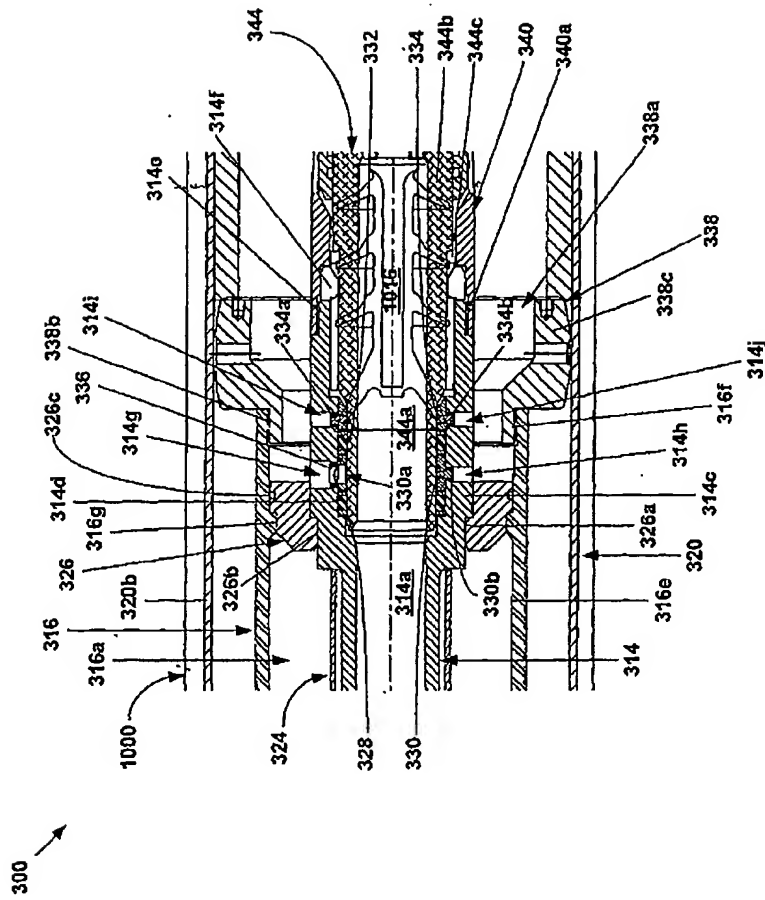


Fig. 25b

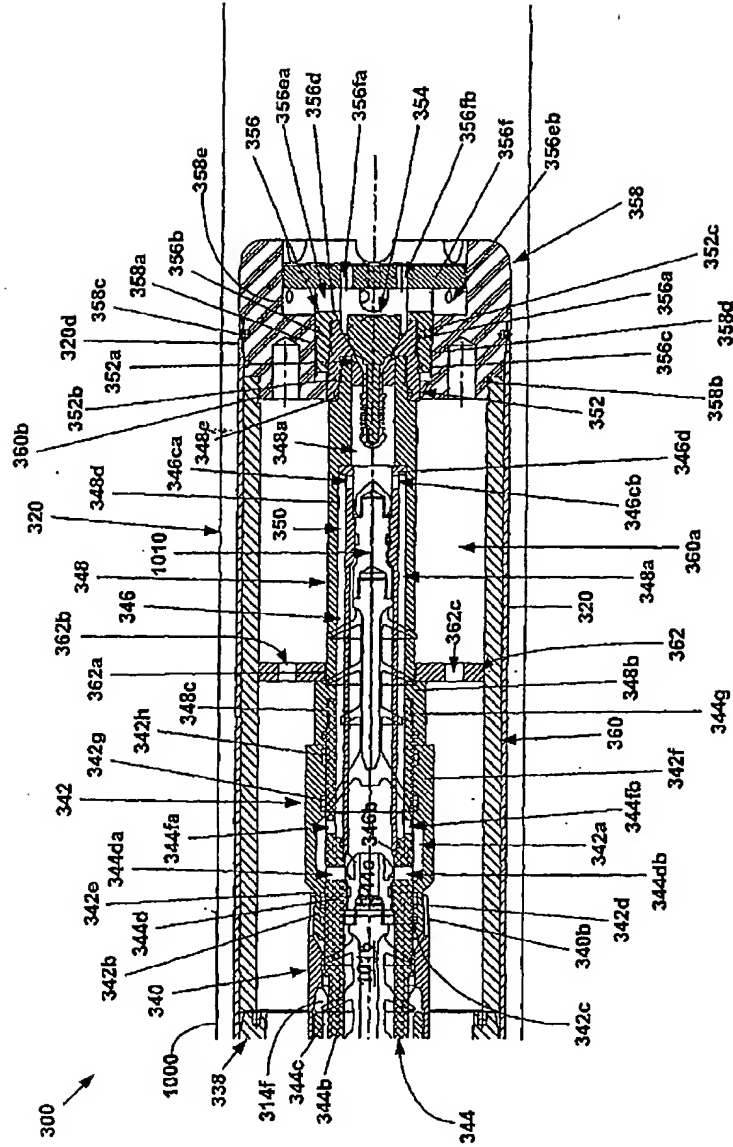


Fig. 25c

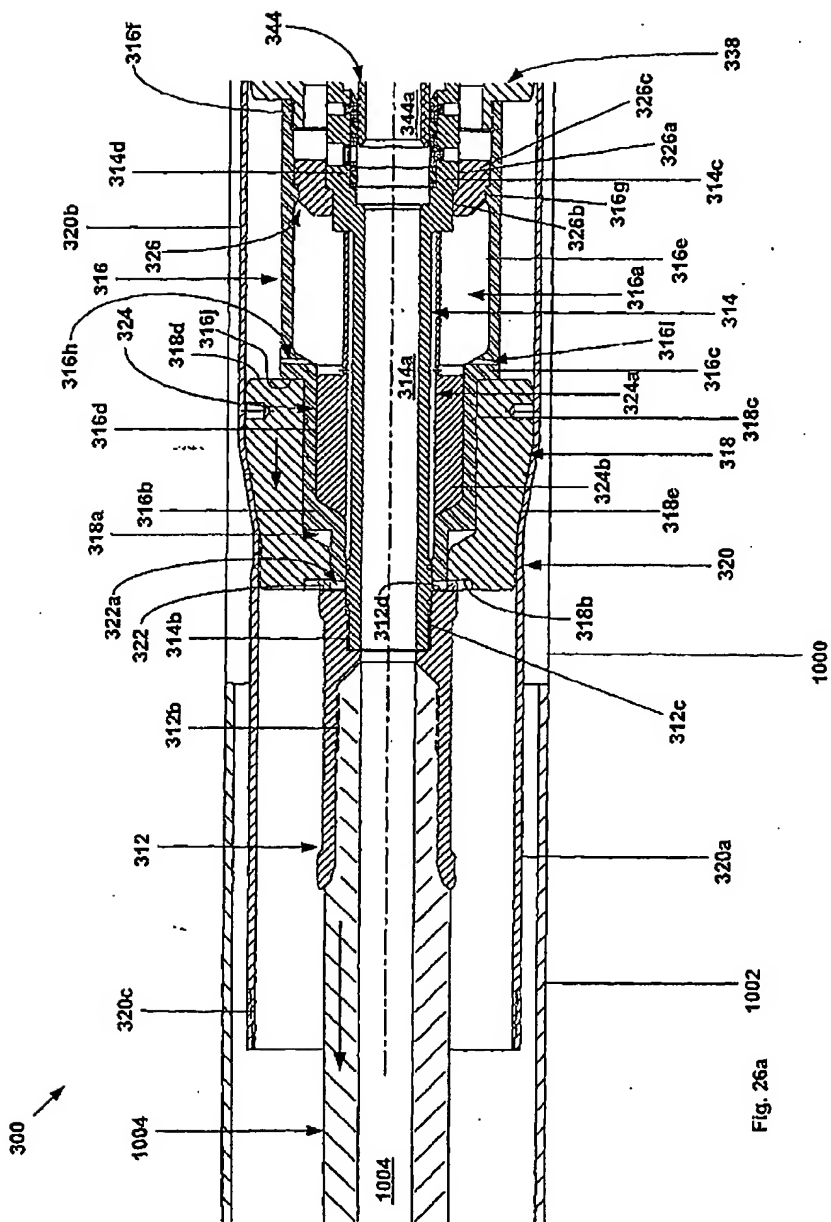
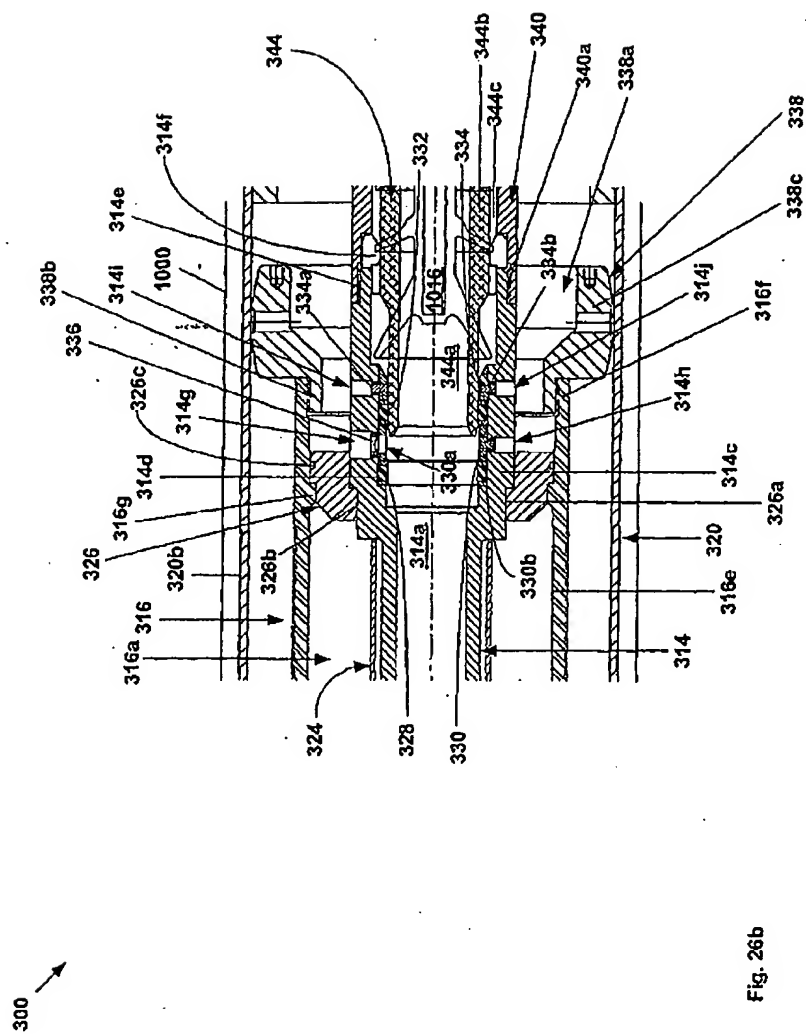


Fig. 26a



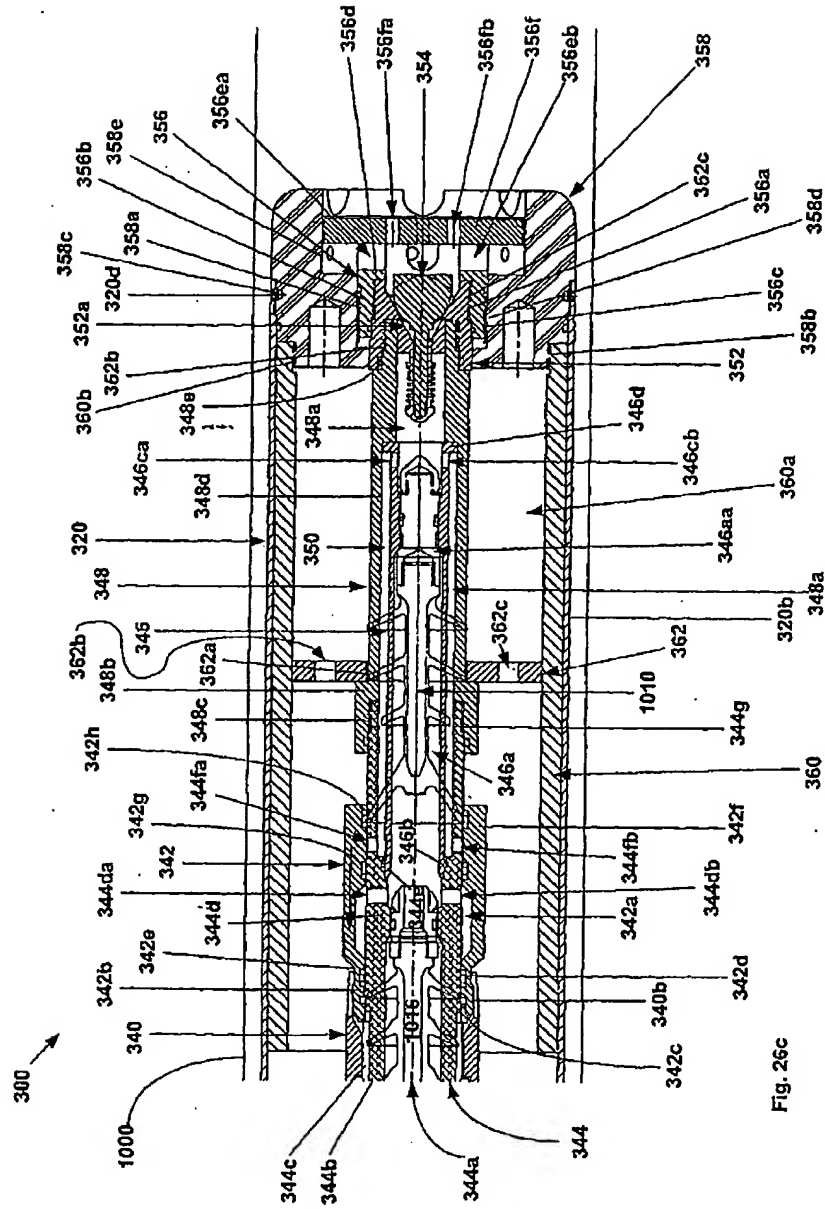


Fig. 26c

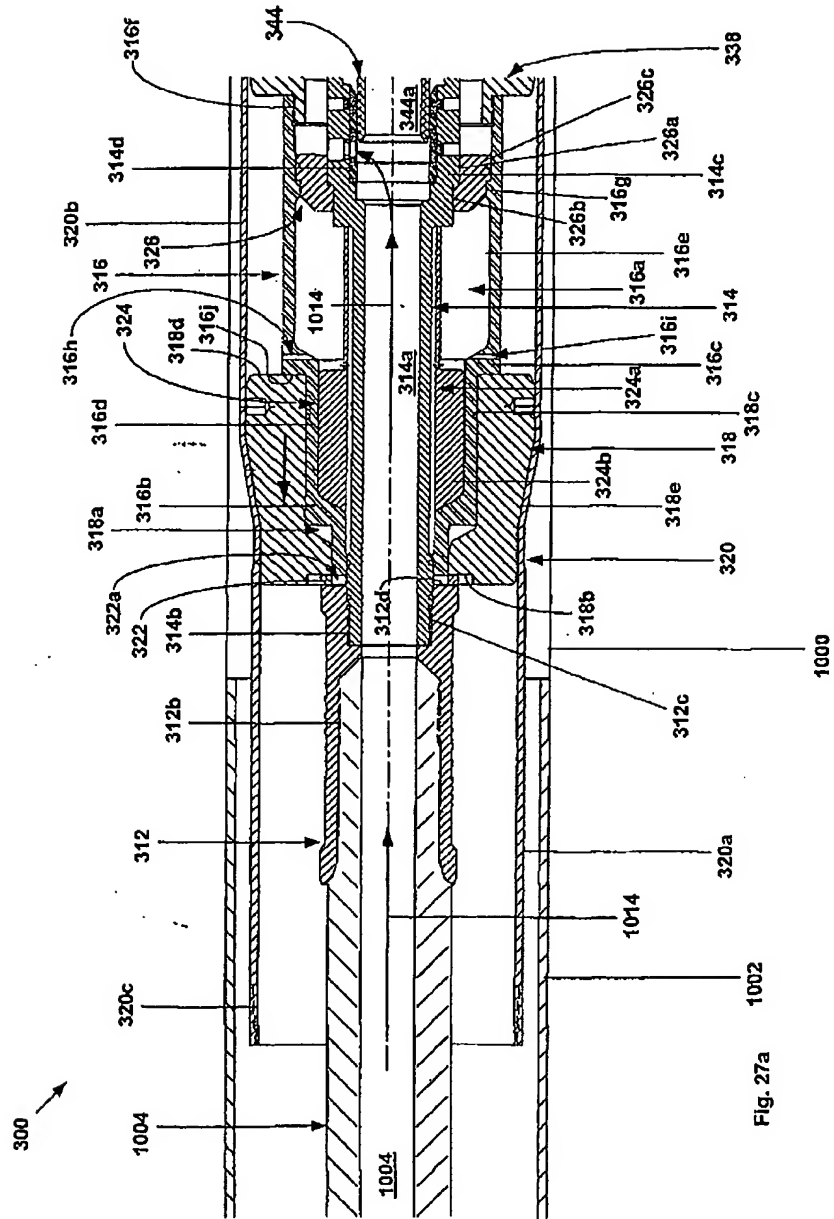
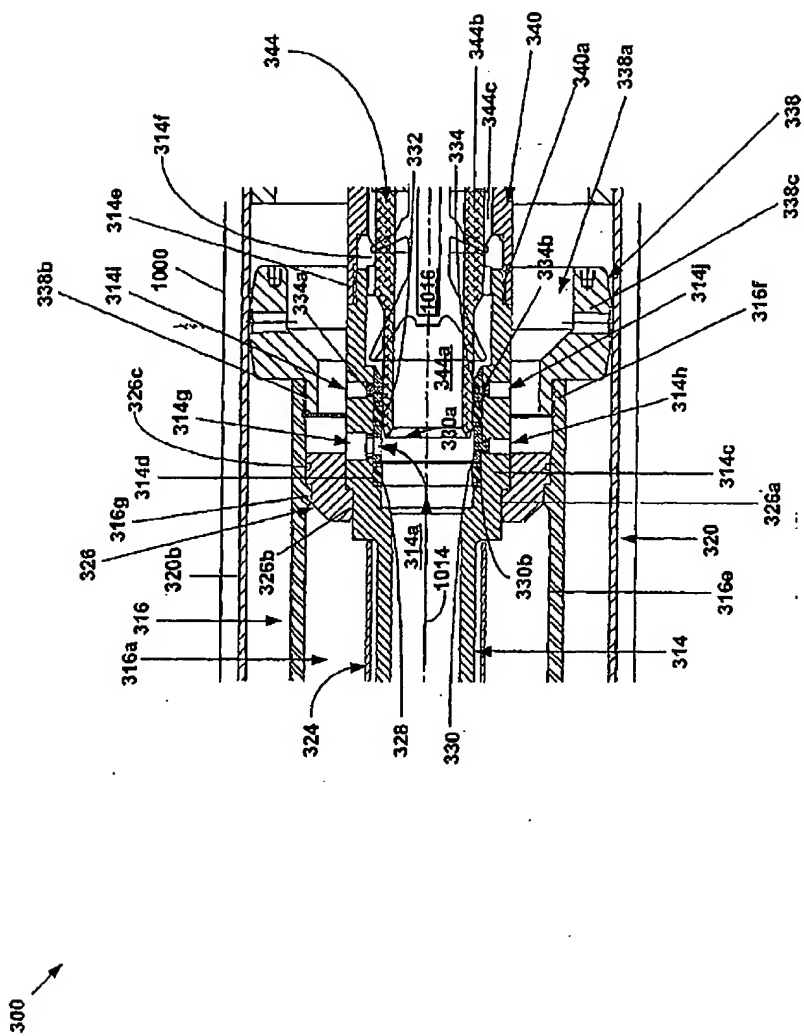


Fig. 27a



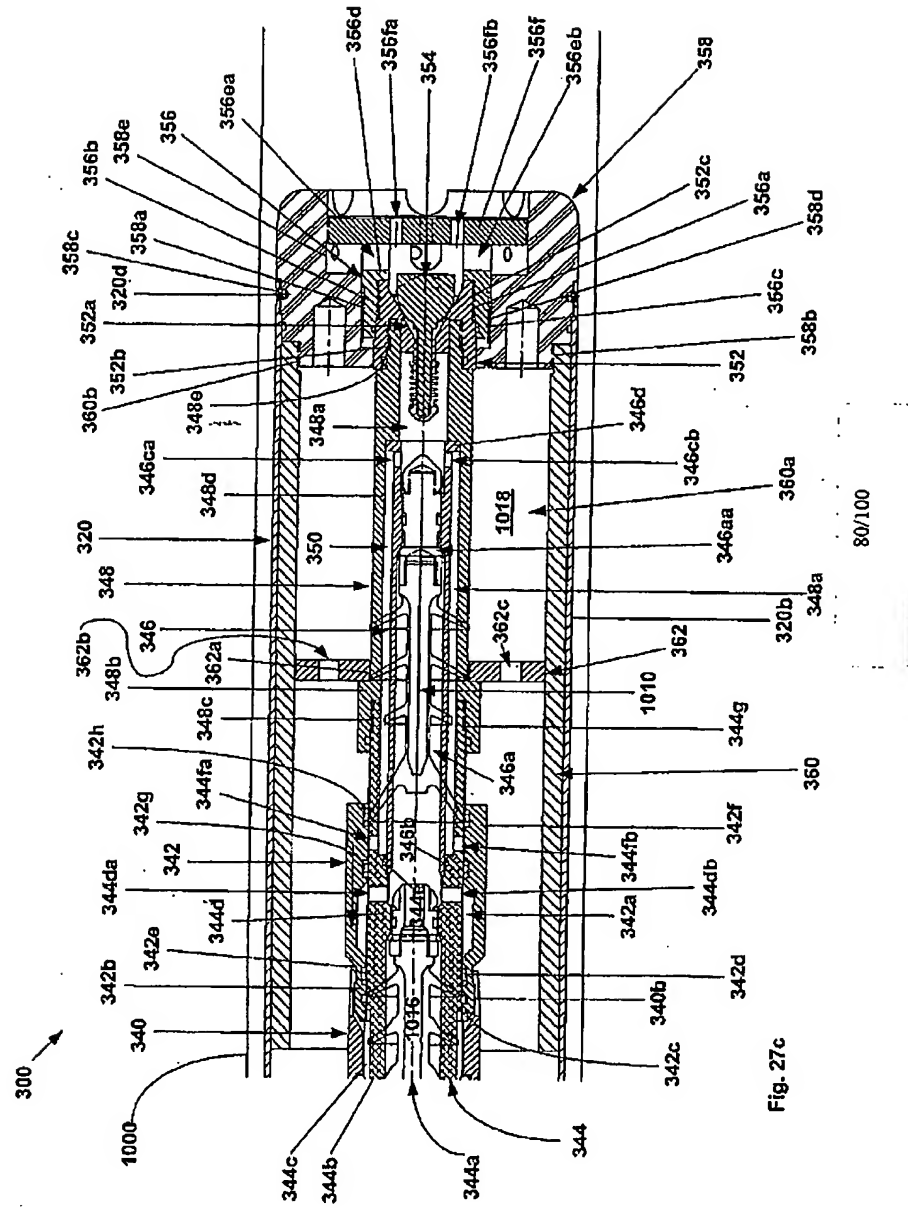


Fig. 27c

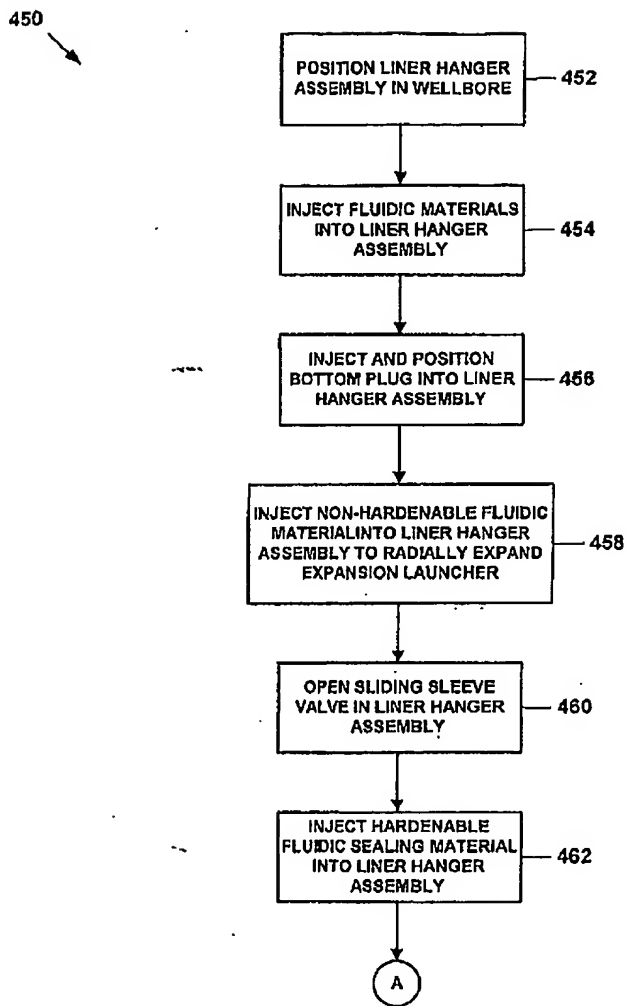


Fig. 28a

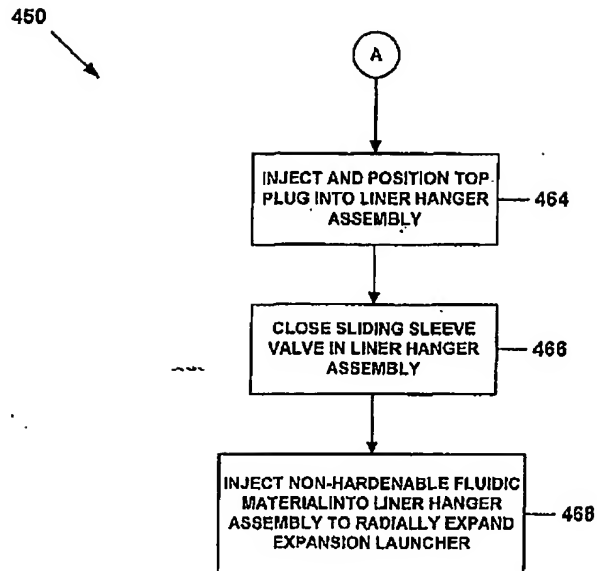
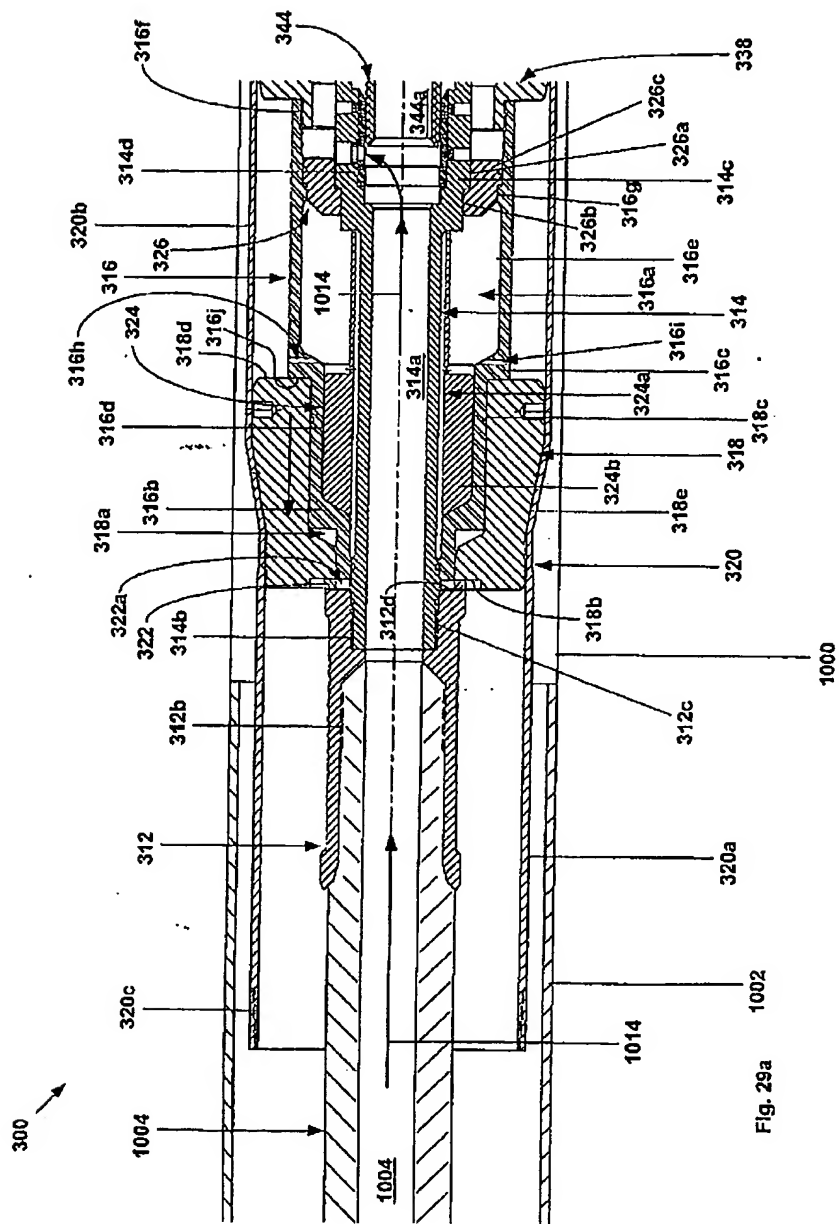


Fig. 28b



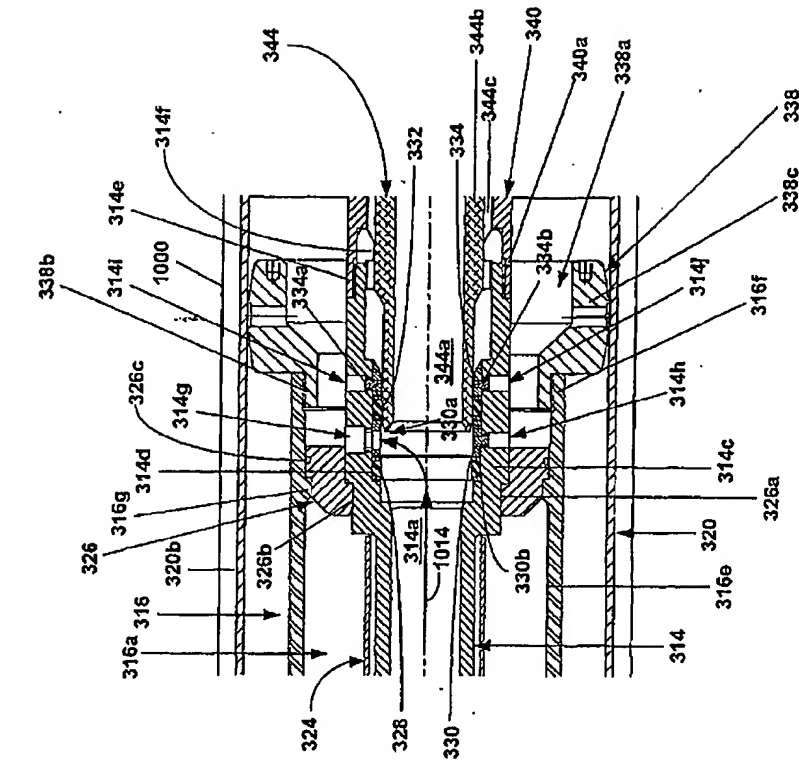


Fig. 29b

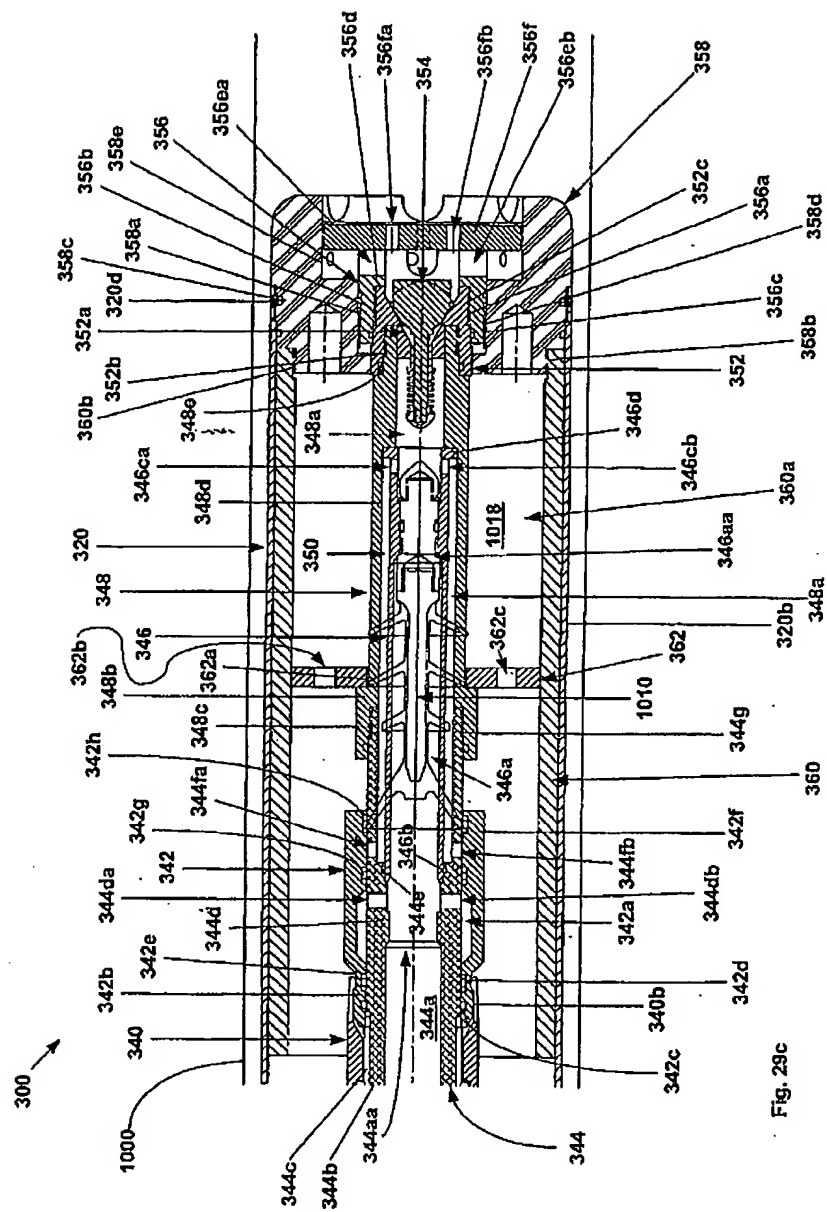
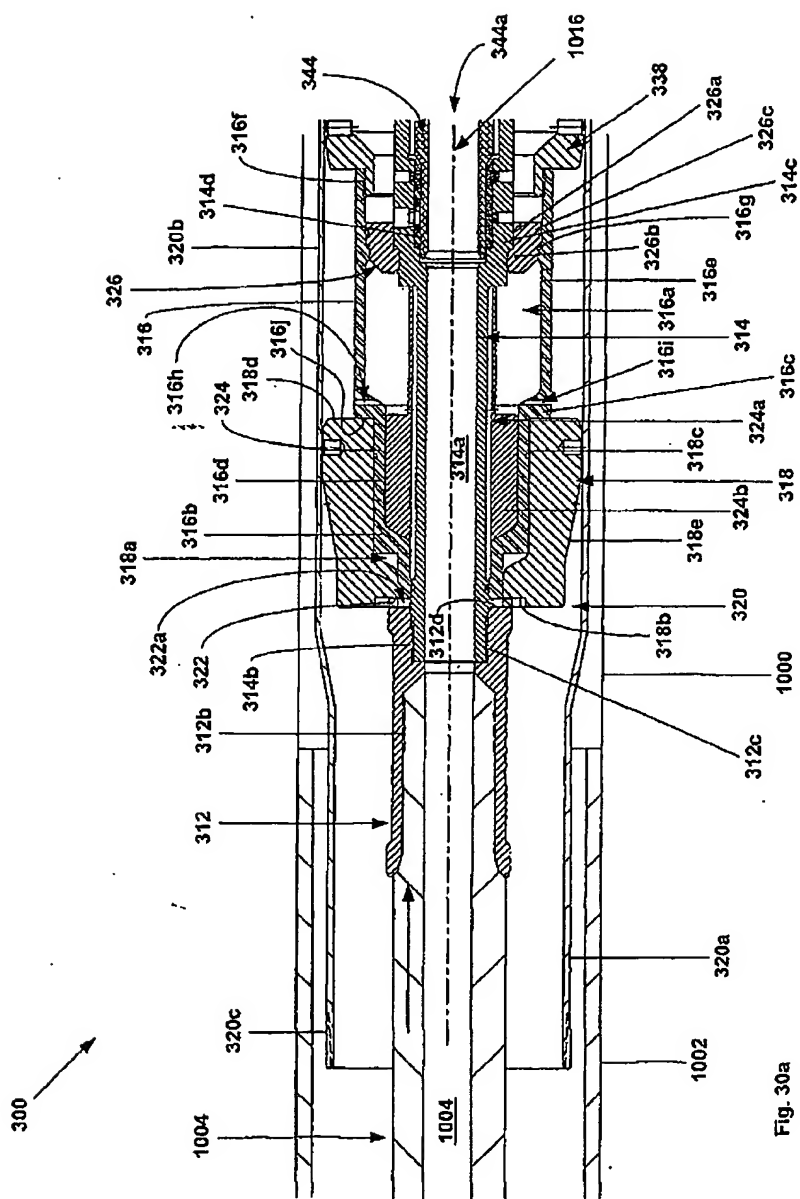


Fig. 29c



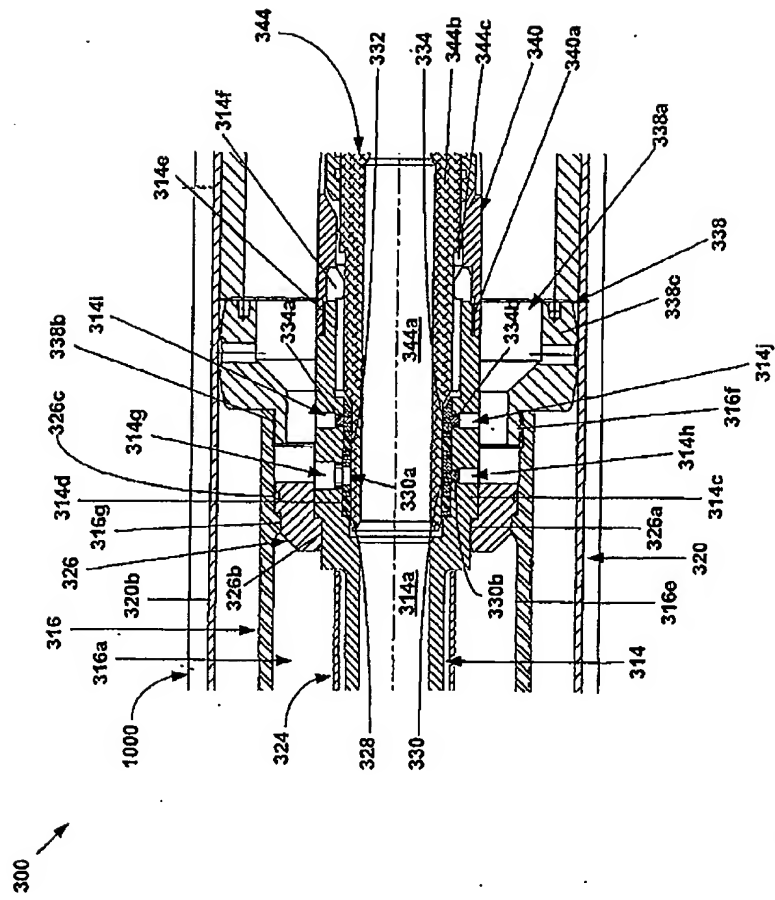


Fig. 30b

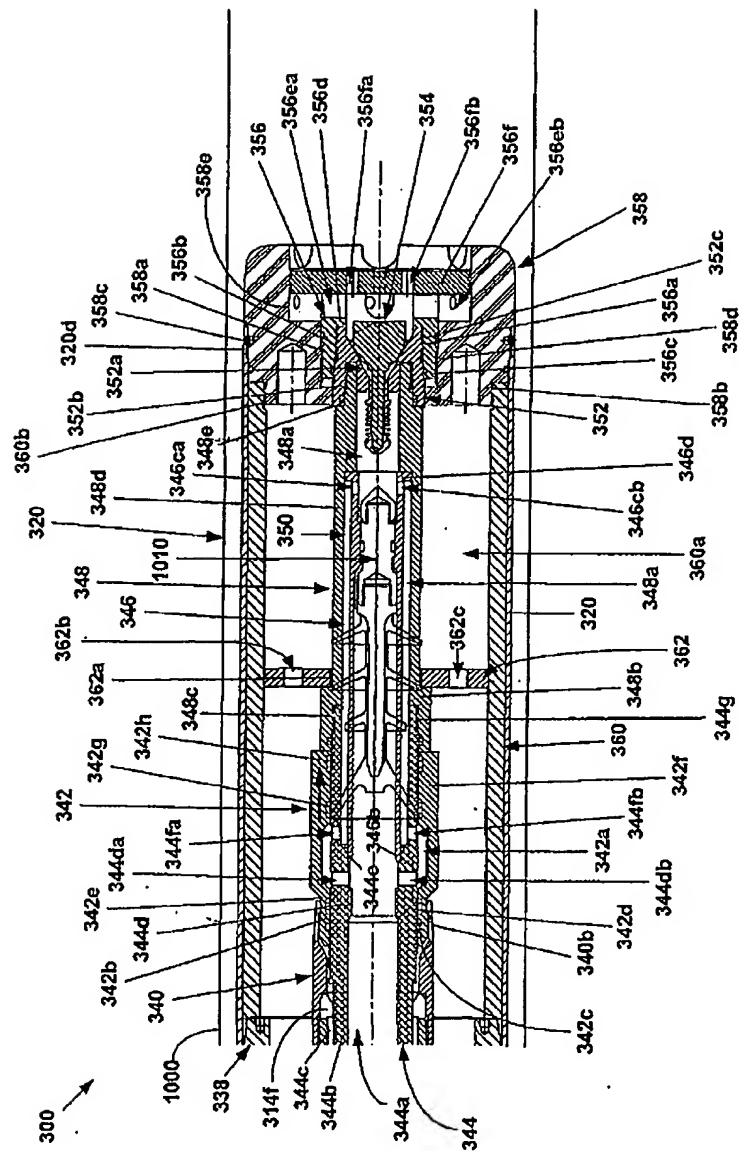


Fig. 30c

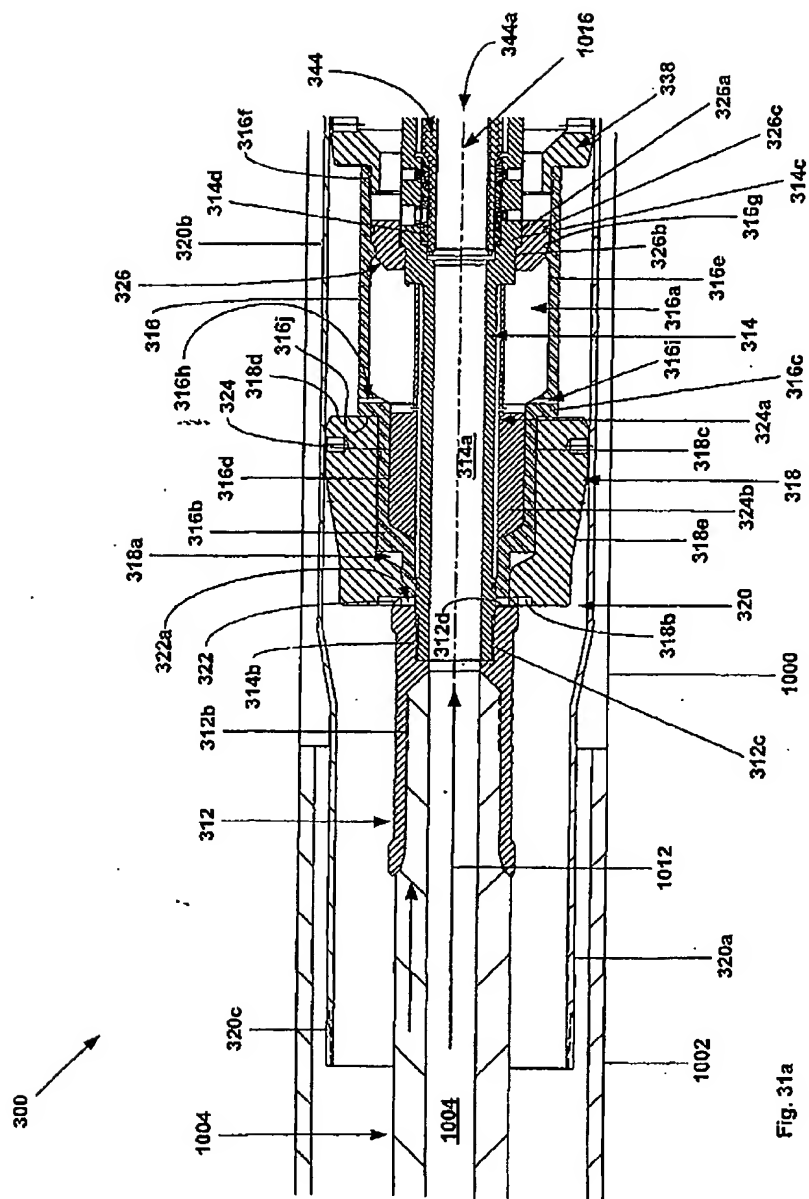


Fig. 31a

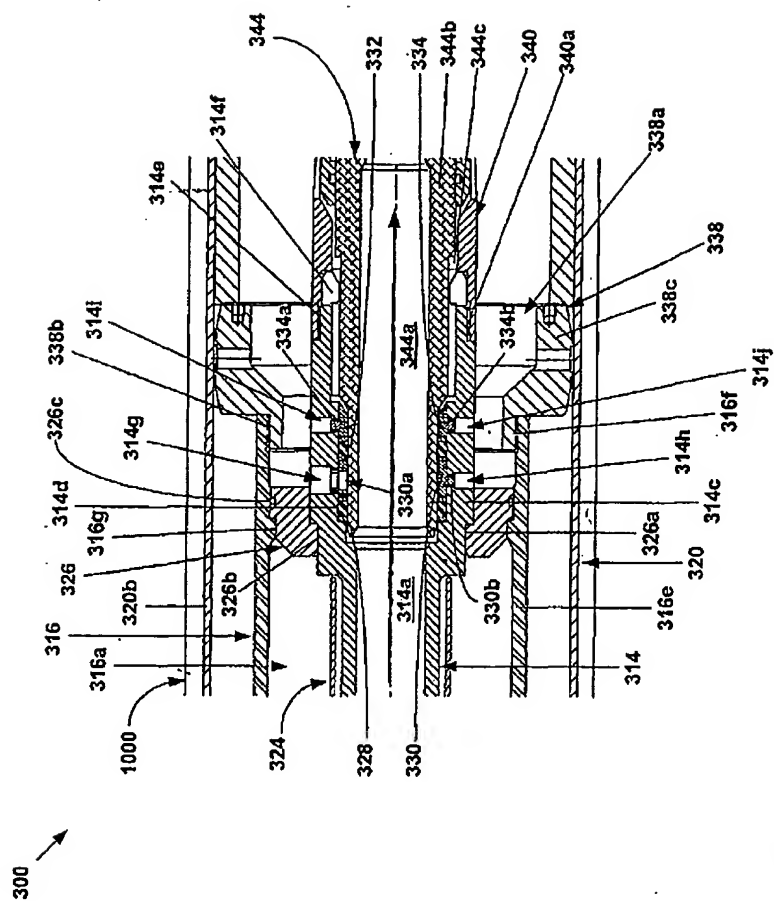


Fig. 31b

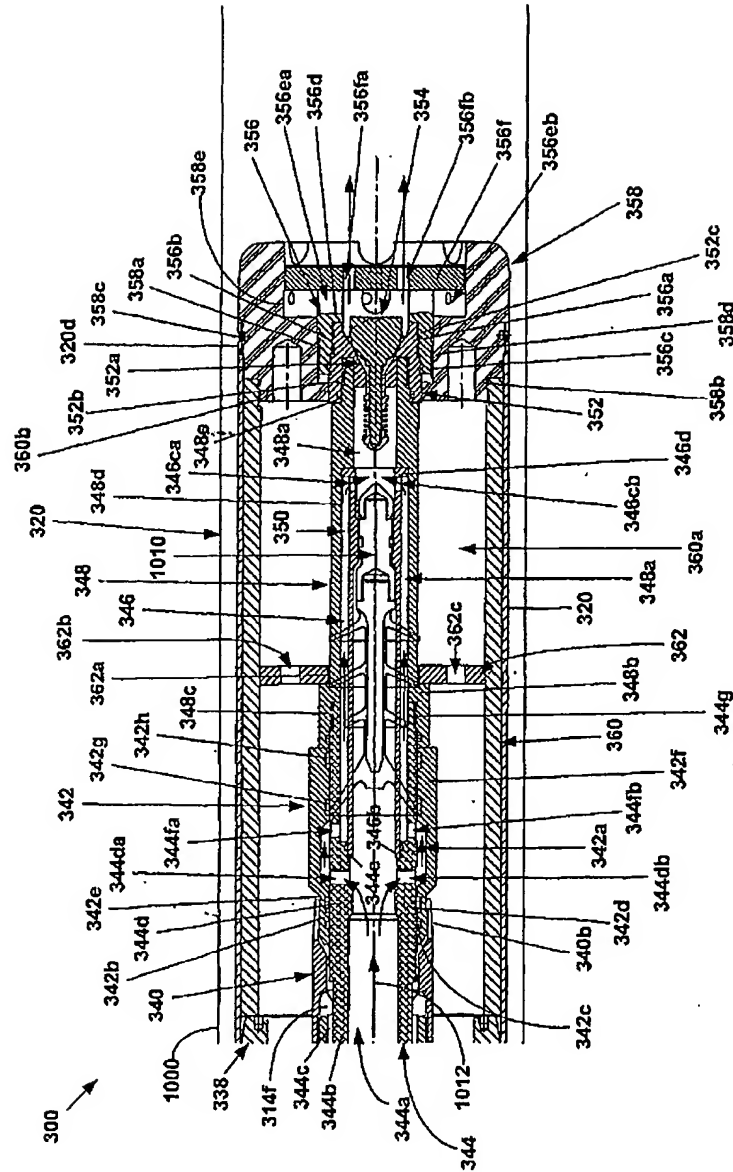


Fig. 31c

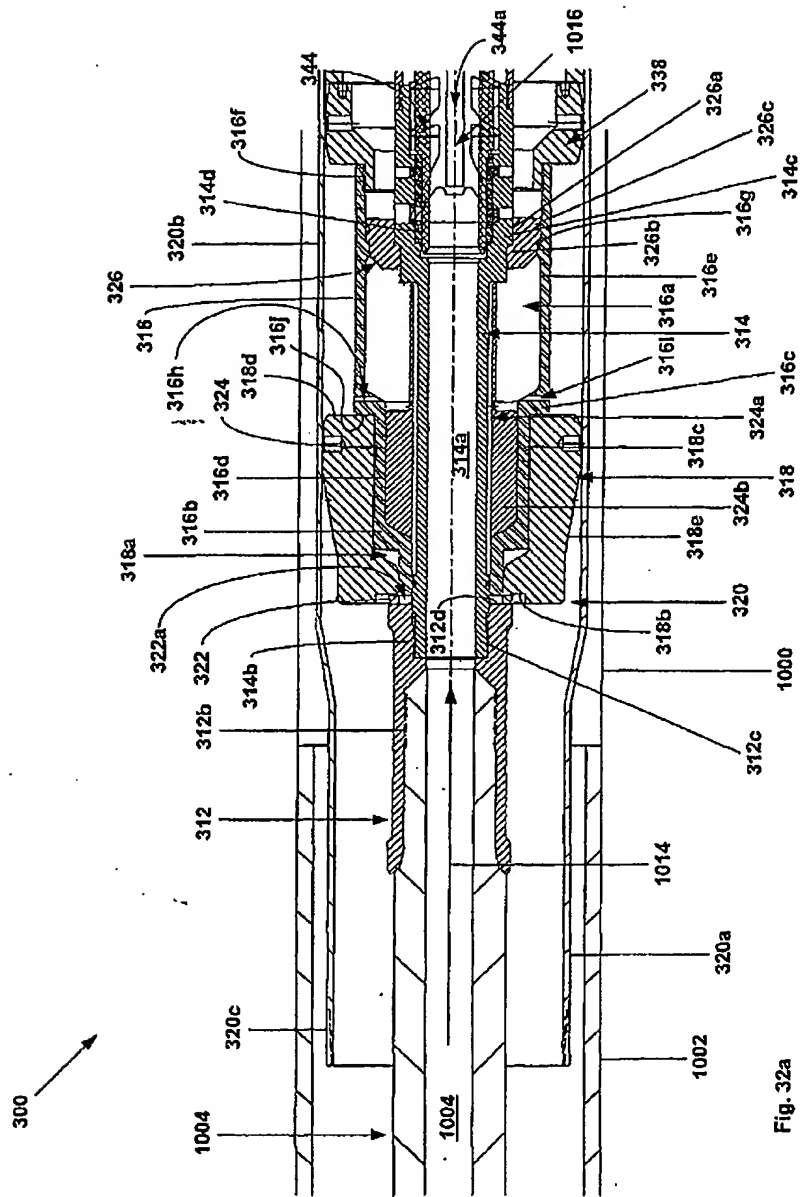


Fig. 32a

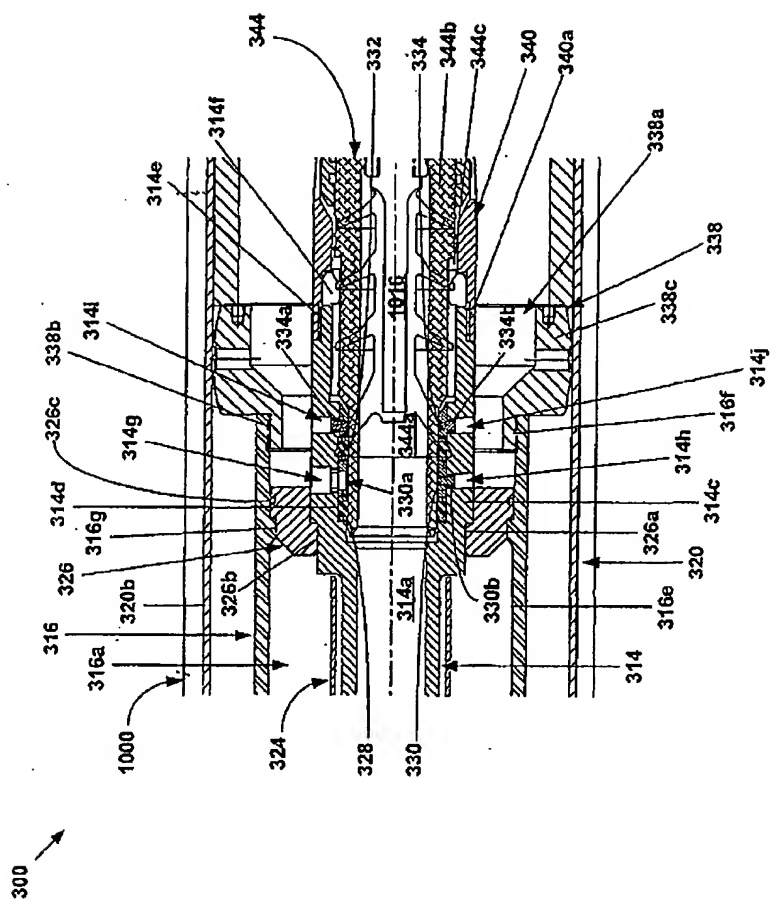


Fig. 32b

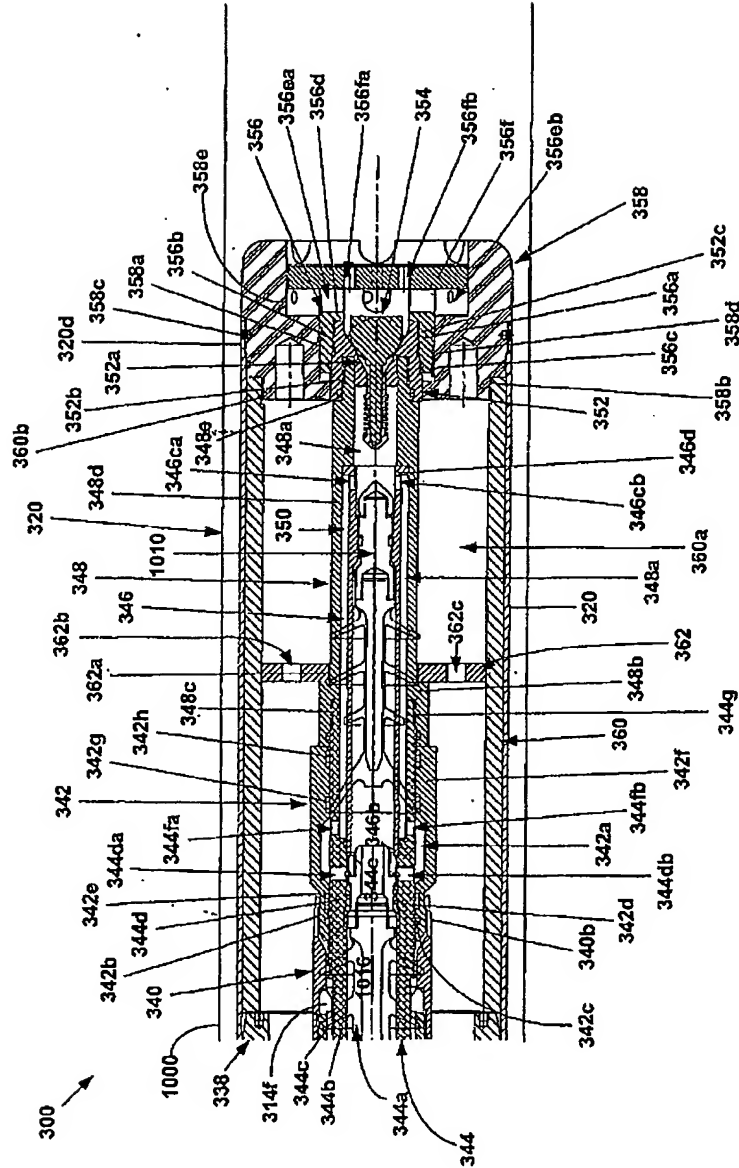
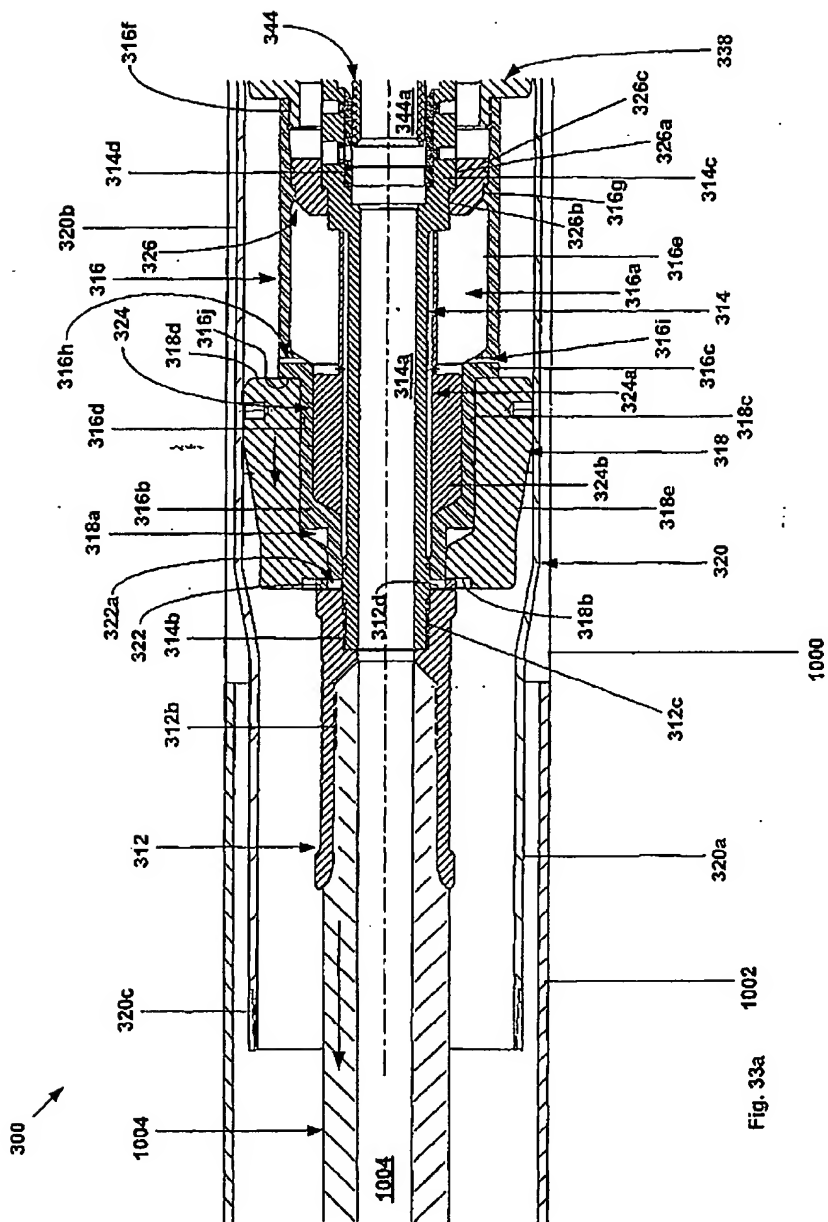
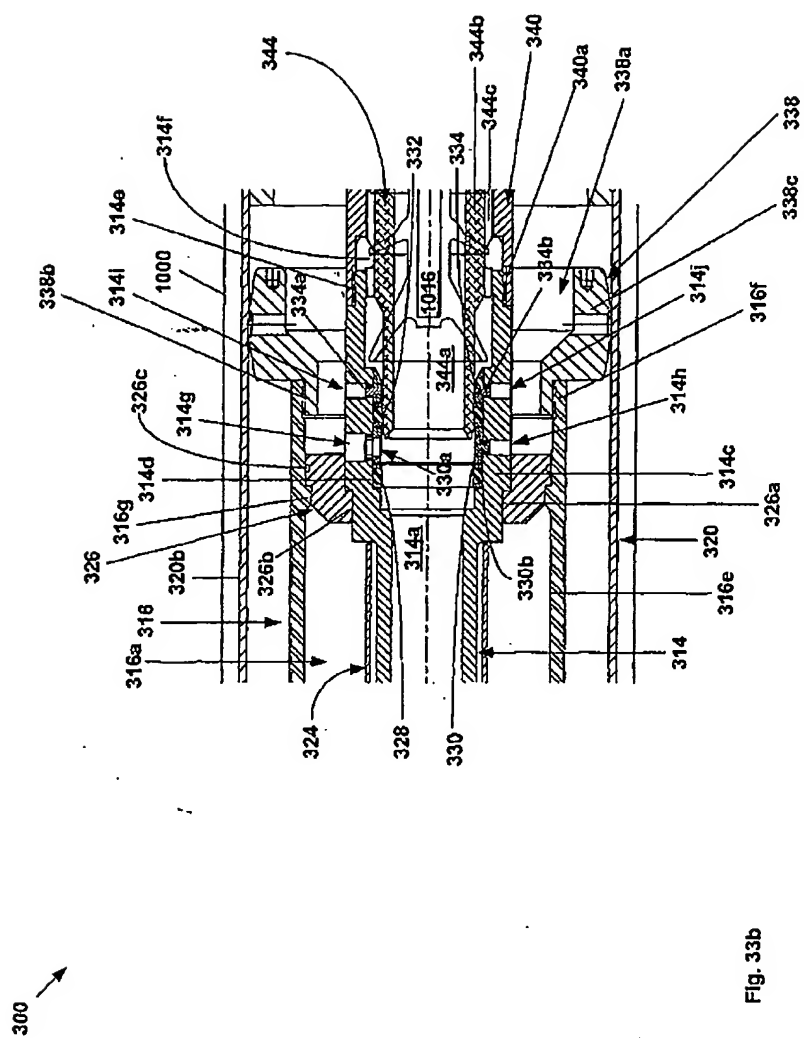


Fig. 32c





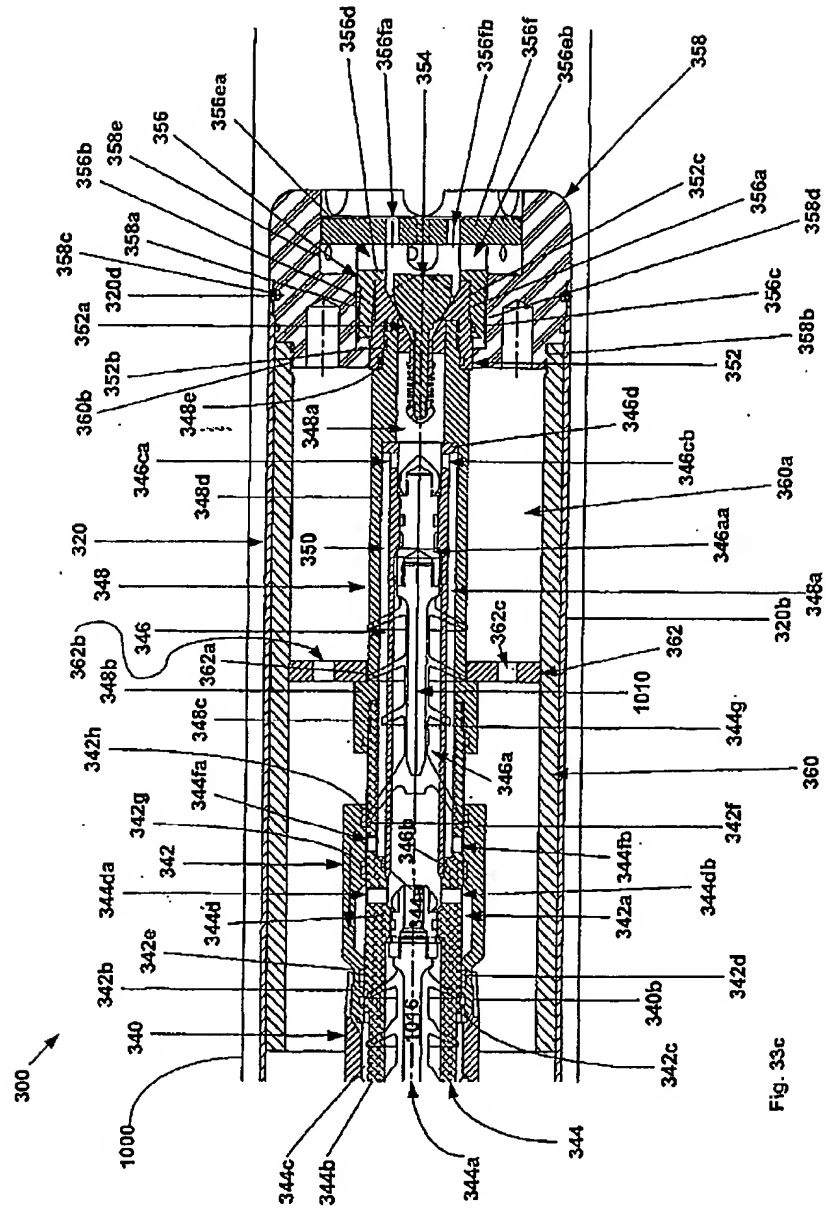
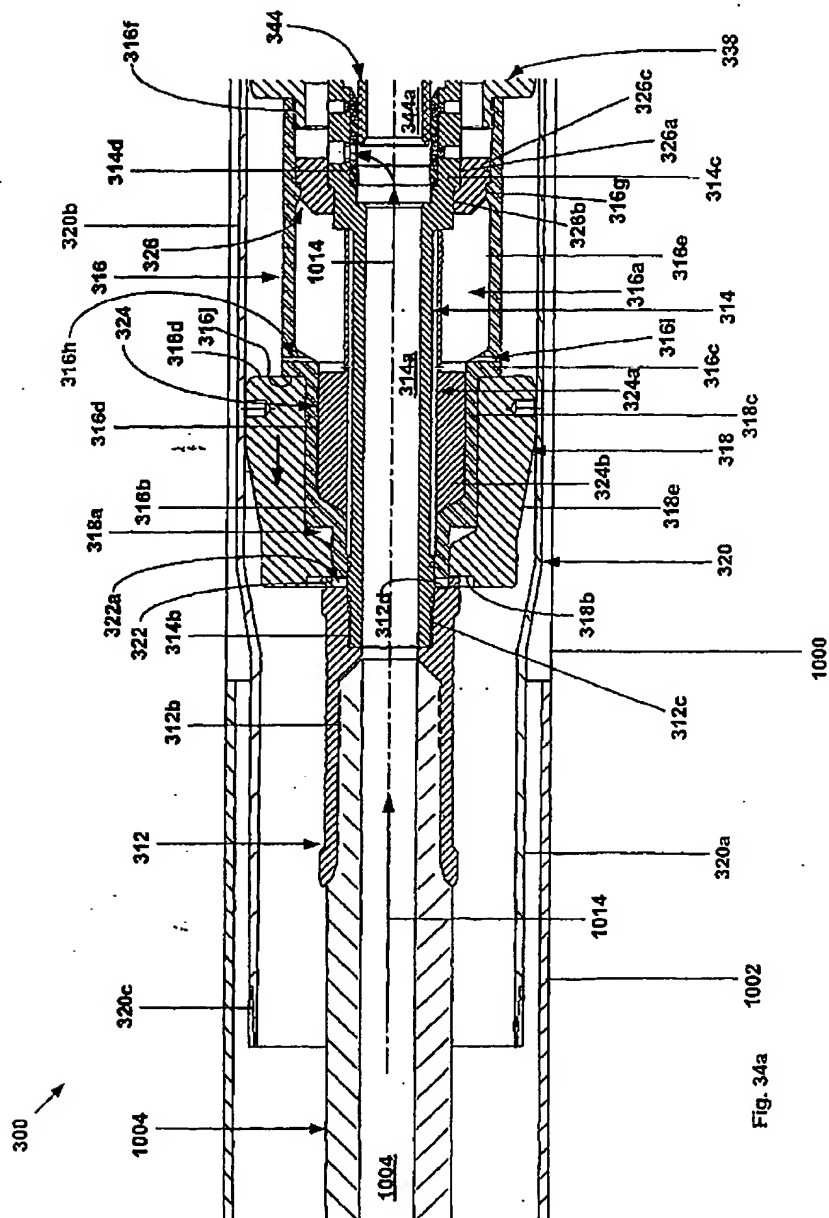
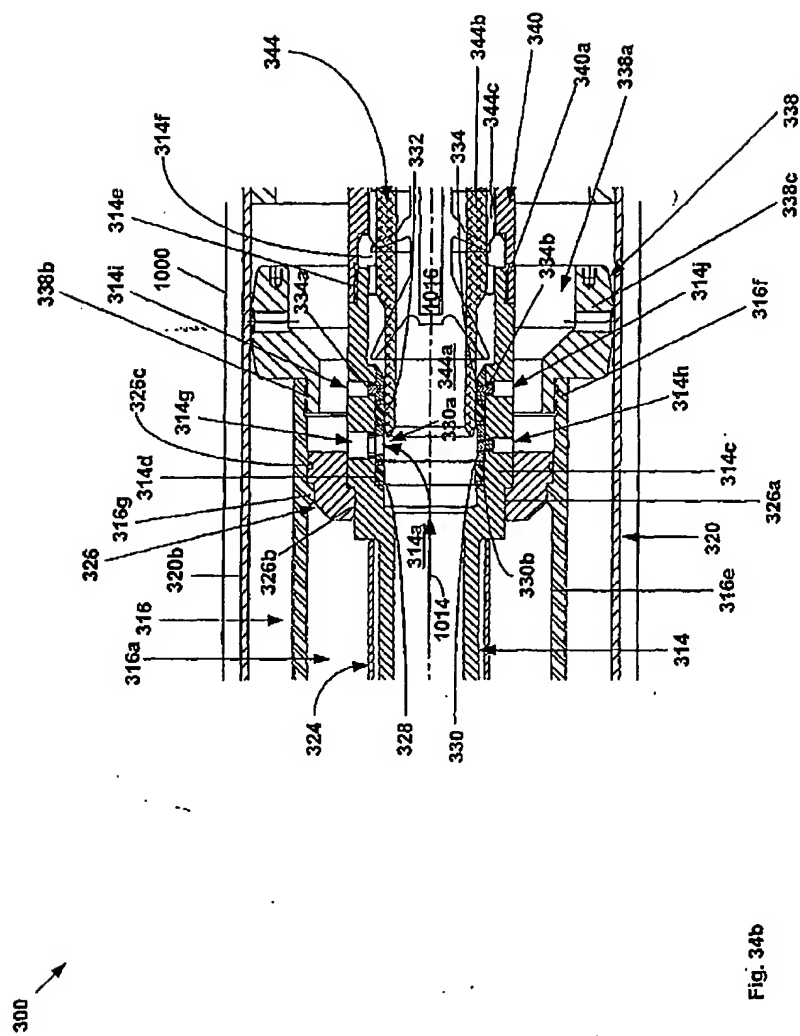


Fig. 33c





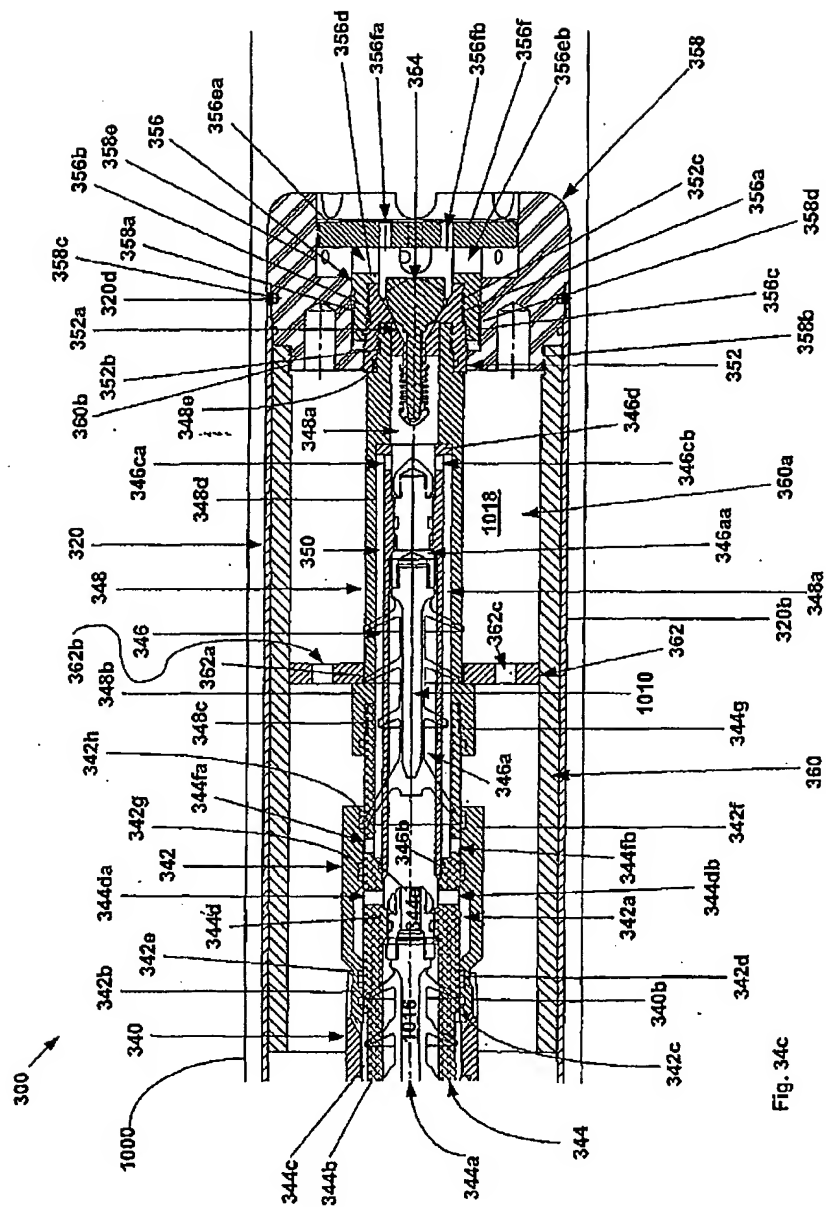


Fig. 34c

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.